




Hand pallet truck

AM 120 / 120p


Lift height: 120 mm / Load capacity: 2000 kg

 JUNGHEINRICH

AM 120 / 120p





AM 120



AM 120p

Inox AISI 316 (V4A)	Feuerverzinkt
Inox AISI 303/304 (V2A)	Verzinkt und gelb chromatiert

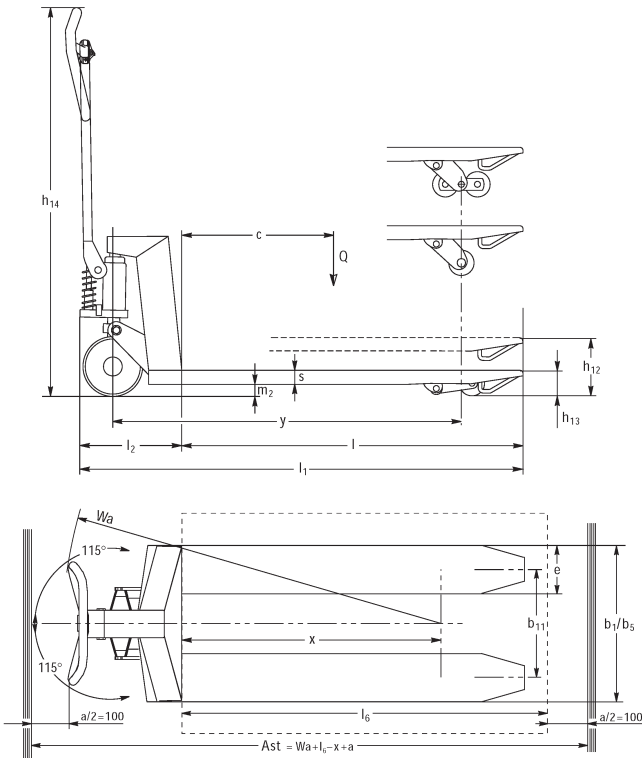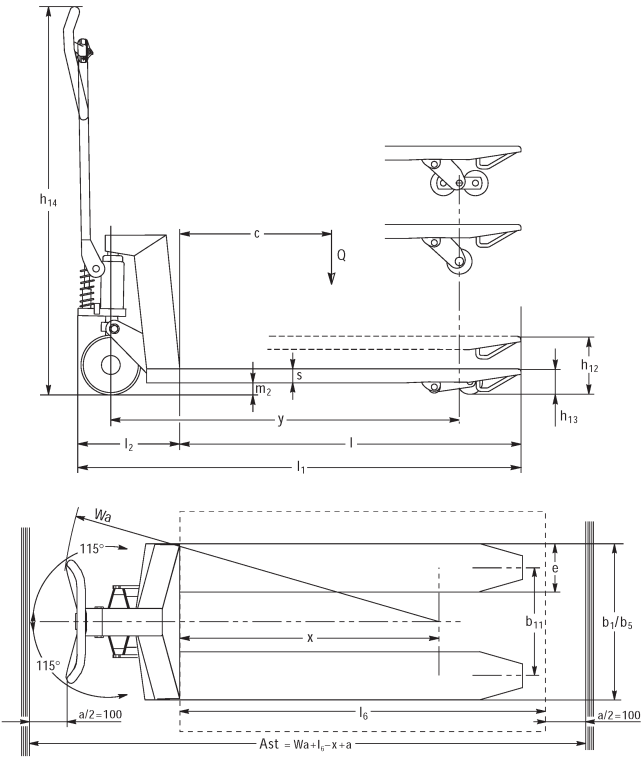

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich						
	1.2	Manufacturer's type designation		AM I20p						
	1.3	Drive type		Manual						
	1.4	Operation		Manual						
	1.5	Load capacity/load	Q	kg	2000					
	1.6	Load centre distance	c	mm	610				570	
	1.9	Wheelbase	y	mm	1245				1165	
Weights	2.1	Netto weight		kg	81		78			
	2.1.1	Service weight (incl. battery)		kg	81		78		-	
Wheels/suspension system	3.1	Tyres			V-BV	N-BN	V-GV	N-GN	V-BV	N-BN
	3.2	Tyre size, front			Ø 200x50					
	3.3	Tyre size, rear			Ø 80x70	Ø 80x65	Ø 80x90		Ø 80x70	Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2					
	3.6	Tread width, front	b10	mm	120					
	3.7	Tread width, rear	b11	mm	520					
Basic dimensions	4.4	Lift (h3)	h3	mm	120					
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170					
	4.14	Stand height, elevated	h12	mm	205					
	4.15	Height, lowered	h13	mm	85					
	4.19	Total length	l1	mm	1555				1475	
	4.21.1	total width	b1	mm	680					
	4.22	Fork dimensions	s/e/ l	mm	51 x 160 x 1220				51 x 160 x 1140	
	4.25	Width across forks	b5	mm	680					
	4.32	Ground clearance centre of wheelbase	m2	mm	34					
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610					
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830				1810	
	4.35	Turning radius	Wa	mm	1410				1330	
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05					
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.										

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich					
	1.2	Manufacturer's type designation			AM I20p					
	1.3	Drive type			Manual					
	1.4	Operation			Manual					
	1.5	Load capacity/load	Q	kg	2000					
	1.6	Load centre distance	c	mm	570		485			
	1.9	Wheelbase	y	mm	1165		995			
Weights	2.1	Netto weight		kg	75		72		69	
	2.1.1	Service weight (incl. battery)		kg	-		72		69 66	
Wheels/suspension system	3.1	Tyres			C-GV	N-GN	V-BV	N-BN	V-GV	N-GN
	3.2	Tyre size, front			Ø 200x50					
	3.3	Tyre size, rear			Ø 80x90		Ø 80x70	Ø 80x65	Ø 80x90	
	3.5	Wheels, number front/back (x=driven)			2/2					
	3.6	Tread width, front	b10	mm	120					
	3.7	Tread width, rear	b11	mm	520					
Basic dimensions	4.4	Lift (h3)	h3	mm	120					
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170					
	4.14	Stand height, elevated	h12	mm	205					
	4.15	Height, lowered	h13	mm	85					
	4.19	Total length	l1	mm	1475		1305			
	4.21.1	total width	b1	mm	680					
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 1140		51 x 160 x 970			
	4.25	Width across forks	b5	mm	680					
	4.32	Ground clearance centre of wheelbase	m2	mm	34					
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610					
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810					
	4.35	Turning radius	Wa	mm	1330		1160			
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05					
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.										

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich							
	1.2	Manufacturer's type designation		AM I20p							
	1.3	Drive type		Manual							
	1.4	Operation		Manual							
	1.5	Load capacity/load	Q	kg	2000						
	1.6	Load centre distance	c	mm	610		570				
	1.9	Wheelbase	y	mm	1245		1165				
Weights	2.1	Netto weight		kg	72				69		
	2.1.1	Service weight (incl. battery)		kg	72		-				
	2.2	Axle load laden front/rear		-	- / -					636 / 1432	
	2.3	Axle load unladen front/rear		-	- / -					21 / 47	
Wheels/suspension system	3.1	Tyres			V-GV	N-GN	V-BV	N-BN	V-GV	N-GN	
	3.2	Tyre size, front			Ø 200x50						
	3.3	Tyre size, rear			Ø 80x90		Ø 80x70	Ø 80x65	Ø 80x90		
	3.5	Wheels, number front/back (x=driven)			2/2						
	3.6	Tread width, front	b10	mm	120						
	3.7	Tread width, rear	b11	mm	360						
	Basic dimensions	4.4	Lift (h3)	h3	mm	120					
4.9		Height of tiller handle in drive position min./max.	h14	mm	1170				1220 / 1170		
4.14		Stand height, elevated	h12	mm	205						
4.15		Height, lowered	h13	mm	85						
4.19		Total length	l1	mm	1555		1475				
4.20		Length including fork shank	l2	mm	-				340		
4.21.1		total width	b1	mm	520						
4.22		Fork dimensions	s/ e/l	mm	51 x 160 x 1220		51 x 160 x 1140				
4.25		Width across forks	b5	mm	520						
4.32		Ground clearance centre of wheelbase	m2	mm	34						
4.34.1		Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610						
4.34.2		Aisle width (pallet 800x1200 length)	Ast	mm	1830		1810				
4.35		Turning radius	Wa	mm	1410		1330				
Performance data											
	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05						
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.											

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich				
	1.2	Manufacturer's type designation			AM I20p		AM I20		
	1.3	Drive type			Manual				
	1.4	Operation			Manual				
	1.5	Load capacity/load	Q	kg	2000				
	1.6	Load centre distance	c	mm	405				
	1.9	Wheelbase	y	mm	835				
Weights	2.1	Netto weight		kg	59			63	
	2.1.1	Service weight (incl. battery)		kg	-		59		63
Wheels/suspension system	3.1	Tyres			V-GV	N-GN	V-GV	N-BN	V-BV
	3.2	Tyre size, front			Ø 200x50				
	3.3	Tyre size, rear			Ø 80x90			Ø 80x65	Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2				
	3.6	Tread width, front	b10	mm	120				
	3.7	Tread width, rear	b11	mm	335	360			
Basic dimensions	4.4	Lift (h3)	h3	mm	120				
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170				
	4.14	Stand height, elevated	h12	mm	205	200			
	4.15	Height, lowered	h13	mm	85				
	4.19	Total length	l1	mm	1145				
	4.21.1	total width	b1	mm	520				
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 810				
	4.25	Width across forks	b5	mm	520				
	4.32	Ground clearance centre of wheelbase	m2	mm	34	38			
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610				
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810				
	4.35	Turning radius	Wa	mm	1000				
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05				
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.									

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich						
	1.2	Manufacturer's type designation		AM I20						
	1.3	Drive type		Manual						
	1.4	Operation		Manual						
	1.5	Load capacity/load	Q	kg	2000					
	1.6	Load centre distance	c	mm	485				570	
	1.9	Wheelbase	y	mm	995				1165	
Weights	2.1	Netto weight		kg	63		66	69		
	2.1.1	Service weight (incl. battery)		kg	63		66	69		
	2.2	Axle load laden front/rear		-	- / -				636 / 1432	- / -
	2.3	Axle load unladen front/rear		-	- / -				21 / 47	- / -
Wheels/suspension system	3.1	Tyres			N-GN	V-GV	N-BN	V-BV	N-GN	V-GV
	3.2	Tyre size, front			Ø 200x50					
	3.3	Tyre size, rear			Ø 80x90		Ø 80x65	Ø 80x70	Ø 80x90	
	3.5	Wheels, number front/back (x=driven)			2/2					
	3.6	Tread width, front	b10	mm	120					
	3.7	Tread width, rear	b11	mm	360					
Basic dimensions	4.4	Lift (h3)	h3	mm	120					
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170					
	4.14	Stand height, elevated	h12	mm	200					
	4.15	Height, lowered	h13	mm	85					
	4.19	Total length	l1	mm	1305				1475	
	4.20	Length including fork shank	l2	mm	-				340	-
	4.21.1	total width	b1	mm	520					
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 970				51 x 160 x 1140	
	4.25	Width across forks	b5	mm	520					
	4.32	Ground clearance centre of wheelbase	m2	mm	38					
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610					
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810					
	4.35	Turning radius	Wa	mm	1160				1330	
Performance data										
	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05					
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.										

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich						
	1.2	Manufacturer's type designation		AM I20						
	1.3	Drive type		Manual						
	1.4	Operation		Manual						
	1.5	Load capacity/load	Q	kg	2000					
	1.6	Load centre distance	c	mm	405			485		
	1.9	Wheelbase	y	mm	835			995		
Weights	2.1	Netto weight		kg	65		69			
	2.1.1	Service weight (incl. battery)		kg	65		69			
Wheels/suspension system	3.1	Tyres			N-GN	V-GV	V-BV	N-BN	N-GN	V-GV
	3.2	Tyre size, front			Ø 200x50					
	3.3	Tyre size, rear			Ø 80x90		Ø 80x70	Ø 80x65	Ø 80x90	
	3.5	Wheels, number front/back (x=driven)			2/2					
	3.6	Tread width, front	b10	mm	120					
	3.7	Tread width, rear	b11	mm	520					
Basic dimensions	4.4	Lift (h3)	h3	mm	120					
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170					
	4.14	Stand height, elevated	h12	mm	200					
	4.15	Height, lowered	h13	mm	85					
	4.19	Total length	l1	mm	1145			1305		
	4.21.1	total width	b1	mm	680					
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 810			51 x 160 x 970		
	4.25	Width across forks	b5	mm	680					
	4.32	Ground clearance centre of wheelbase	m2	mm	38					
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610					
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810					
	4.35	Turning radius	Wa	mm	1000			1160		
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05					
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.										

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich						
	1.2	Manufacturer's type designation		AM I20						
	1.3	Drive type		Manual						
	1.4	Operation		Manual						
	1.5	Load capacity/load	Q	kg	2000					
	1.6	Load centre distance	c	mm	485	570				
	1.9	Wheelbase	y	mm	995	1165				
Weights	2.1	Netto weight		kg	72	75		78		
	2.1.1	Service weight (incl. battery)		kg	72	75		78		
Wheels/suspension system	3.1	Tyres			N-BN	V-BV	N-GN	V-GV	N-BN	V-BV
	3.2	Tyre size, front			Ø 200x50					
	3.3	Tyre size, rear			Ø 80x65	Ø 80x70	Ø 80x90		Ø 80x65	Ø 80x70
	3.5	Wheels, number front/back (x=driven)			2/2					
	3.6	Tread width, front	b10	mm	120					
	3.7	Tread width, rear	b11	mm	520					
Basic dimensions	4.4	Lift (h3)	h3	mm	120					
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170					
	4.14	Stand height, elevated	h12	mm	200					
	4.15	Height, lowered	h13	mm	85					
	4.19	Total length	l1	mm	1305	1475				
	4.21.1	total width	b1	mm	680					
	4.22	Fork dimensions	s/e/ l	mm	51 x 160 x 970	51 x 160 x 1140				
	4.25	Width across forks	b5	mm	680					
	4.32	Ground clearance centre of wheelbase	m2	mm	38					
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610					
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810					
	4.35	Turning radius	Wa	mm	1160	1330				
	Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05				
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.										

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich				
	1.2	Manufacturer's type designation		AM I20				
	1.3	Drive type		Manual				
	1.4	Operation		Manual				
	1.5	Load capacity/load	Q	kg	2000			
	1.6	Load centre distance	c	mm	610			
	1.9	Wheelbase	y	mm	1245			
Weights	2.1	Netto weight		kg	78			81
	2.1.1	Service weight (incl. battery)		kg	78			81
Wheels/suspension system	3.1	Tyres			N-GN	V-GV	V-BV	N-BN
	3.2	Tyre size, front			Ø 200x50			
	3.3	Tyre size, rear			Ø 80x90			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2			
	3.6	Tread width, front	b10	mm	120			
	3.7	Tread width, rear	b11	mm	520			
Basic dimensions	4.4	Lift (h3)	h3	mm	120			
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170			
	4.14	Stand height, elevated	h12	mm	200			
	4.15	Height, lowered	h13	mm	85			
	4.19	Total length	l1	mm	1555			
	4.21.1	total width	b1	mm	680			
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 1220			
	4.25	Width across forks	b5	mm	680			
	4.32	Ground clearance centre of wheelbase	m2	mm	38			
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm	1610			
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830			
	4.35	Turning radius	Wa	mm	1410			
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05			
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.								

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**