







Scissor lift hand pallet truck

AMX 10 / 10e

Lift height: 714 mm / Load capacity: 1000 kg

JUNGHEINRICH

AMX 10 / 10e

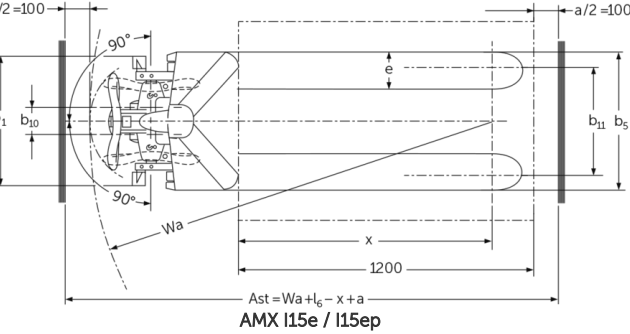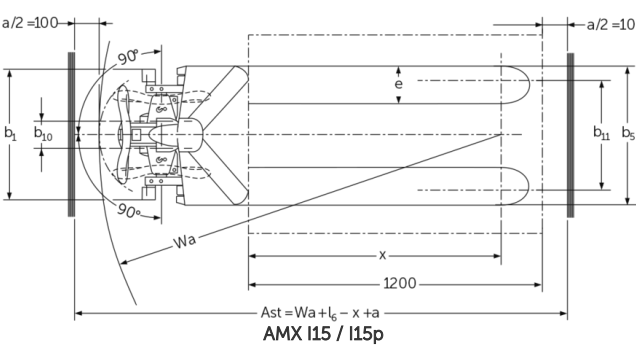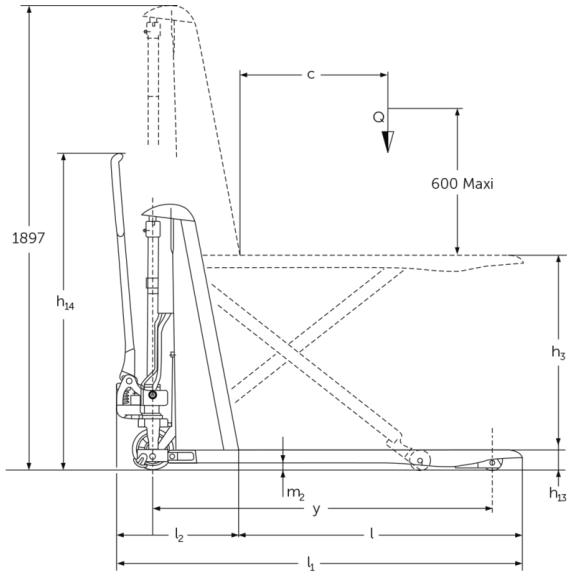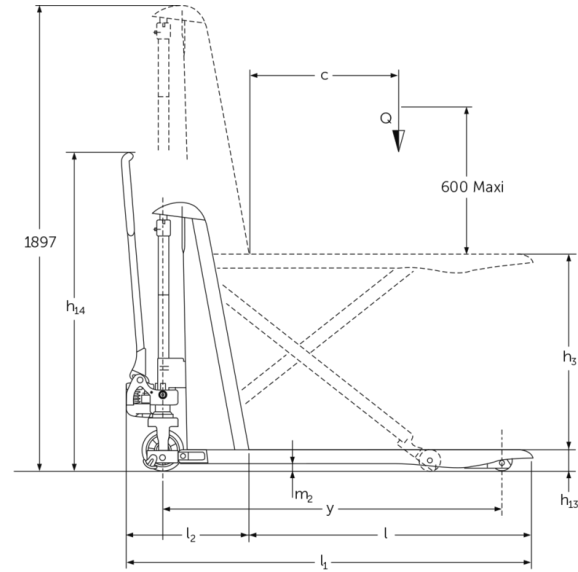

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich					
	1.2	Manufacturer's type designation		AMX 10e					
	1.3	Drive type		electric	Manual				
	1.4	Operation		Manual					
	1.5	Load capacity/load	Q kg	1000					
	1.6	Load centre distance	c mm	600					
	1.9	Wheelbase	y mm	1383	-				
Weights	2.1	Netto weight	kg	195					
	2.2	Axle load laden front/rear	kg	443 / 752	- / -				
	2.3	Axle load unladen front/rear	kg	136 / 59	- / -				
Wheels/suspension system	3.1	Tyres		C-GN	N-GN	V-GV	N-GN	C-GN	V-GV
	3.2	Tyre size, front		Ø 170 x 50	-				
	3.3	Tyre size, rear		Ø 82 x 62	-				
	3.5	Wheels, number front/back (x=driven)		2/2	-				
	3.6	Tread width, front	b10 mm	109	-				
	3.7	Tread width, rear	b11 mm	440	-				
Basic dimensions	4.4	Lift (h3)	h3 mm	714					
	4.5	Extended mast height (h4)	h4 mm	1897	-				
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1299	-				
	4.15	Height, lowered	h13 mm	86					
	4.19	Total length	l1 mm	1650					
	4.20	Length including fork shank	l2 mm	500	-				
	4.21.1	total width	b1 mm	560			680		
	4.22	Fork dimensions	s/ e/l mm	53 x 150 x 1150		150 x 1150			
	4.25	Width across forks	b5 mm	560			680		
	4.32	Ground clearance centre of wheelbase	m2 mm	30	-				
Performance data	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	2005	-				
	5.3	Lowering speed laden/unladen	m/s	0.13 / 0.05	- / -				

E-motor/Electronics	6.2	Lift motor, performance with S3	kW	0.5	
	6.4	Battery voltage/nominal capacity	V / Ah	12 / 70	
	6.5	Battery weight	kg	24	-

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich						
	1.2	Manufacturer's type designation		AMX 10						
	1.3	Drive type		Manual						
	1.4	Operation		Manual						
	1.5	Load capacity/load	Q	kg	1000					
	1.6	Load centre distance	c	mm	600					
	1.9	Wheelbase	y	mm	1383	-				
Weights	2.1	Netto weight		kg	157					
	2.2	Axle load laden front/rear		kg	406 / 751	- / -				
	2.3	Axle load unladen front/rear		kg	101 / 56	- / -				
Wheels/suspension system	3.1	Tyres			C-GN	N-GN	V-GV	N-GN	C-GN	V-GV
	3.2	Tyre size, front			Ø 170 x 50	-				
	3.3	Tyre size, rear			Ø 82 x 62	-				
	3.5	Wheels, number front/back (x=driven)			2/2	-				
	3.6	Tread width, front	b10	mm	109	-				
	3.7	Tread width, rear	b11	mm	440	-				
Basic dimensions	4.4	Lift (h3)	h3	mm	714					
	4.5	Extended mast height (h4)	h4	mm	1897	-				
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1299	-				
	4.15	Height, lowered	h13	mm	86					
	4.19	Total length	l1	mm	1650					
	4.20	Length including fork shank	l2	mm	500	-				
	4.21.1	total width	b1	mm	560			680		
	4.22	Fork dimensions	s/ e/l	mm	53 x 150 x 1150		150 x 1150			
	4.25	Width across forks	b5	mm	560			680		
	4.32	Ground clearance centre of wheelbase	m2	mm	30		-			
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	2005		-			
	4.35	Turning radius	Wa	mm	1635		-			

Performance data	5.3	Lowering speed laden/unladen	m/s	0.11 / 0.04	- / -
	- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**