




## Hand pallet truck

**AMX I15 / I15 e / I15 p / I15 ep**

Lift height: 710 mm / Load capacity: 1500 kg

**JUNGHEINRICH**

# AMX I15 / I15 e / I15 p / I15 ep

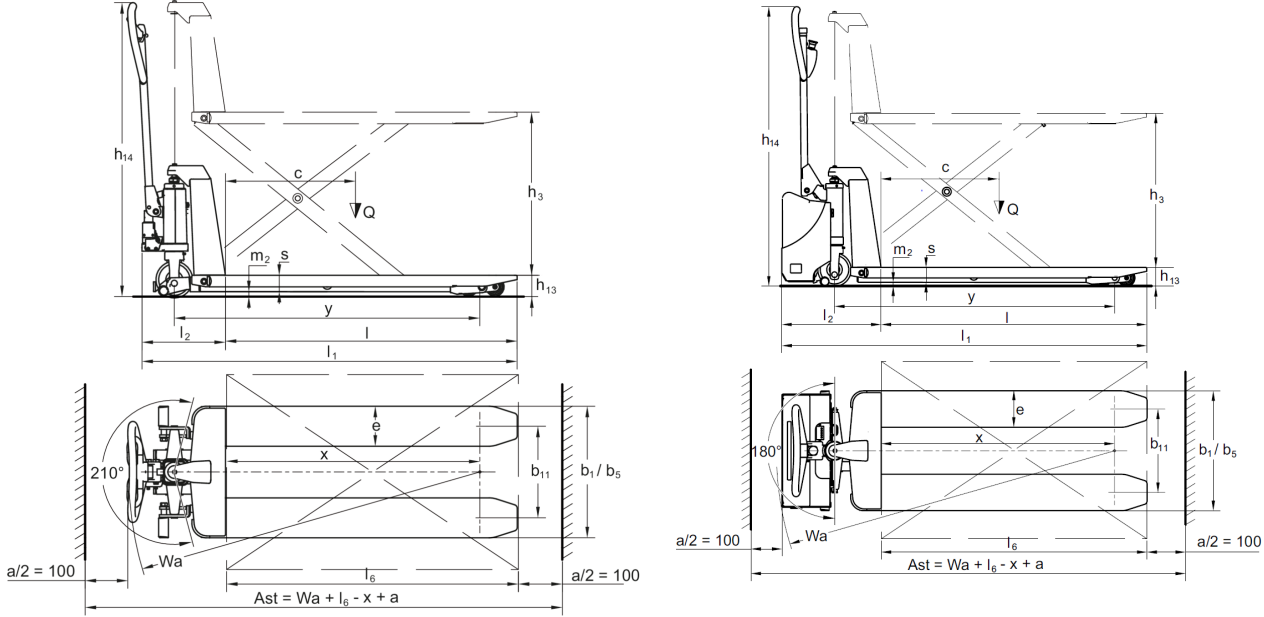

# VDI table

|                  |        |                                                     |  |           |          |                 |           |           |         |             |          |           |      |
|------------------|--------|-----------------------------------------------------|--|-----------|----------|-----------------|-----------|-----------|---------|-------------|----------|-----------|------|
| Characteristic   | 1.2    | Manufacturer's type designation                     |  |           | AMX I15e |                 | AMX I15ep |           | AMX I15 |             | AMX I15p |           |      |
|                  | 1.3    | Drive type                                          |  |           | Manual   |                 |           |           |         |             |          |           |      |
|                  | 1.4    | Operation                                           |  |           | Manual   |                 |           |           |         |             |          |           |      |
|                  | 1.5    | Load capacity/load                                  |  | Q         | kg       | 1500            |           |           |         |             |          |           |      |
|                  | 1.6    | Load centre distance                                |  | c         | mm       | 600             |           |           |         |             |          |           |      |
|                  | 1.9    | Wheelbase                                           |  | y         | mm       | 1255            |           |           |         |             |          |           |      |
| Weights          | 2.1    | Netto weight                                        |  |           | kg       | 132             |           |           |         | 125         |          |           |      |
|                  | 2.2    | Axle load laden front/rear                          |  |           | kg       | 753 / 357       |           | 753 / 387 |         | 720 / 358   |          | 750 / 358 |      |
|                  | 2.3    | Axle load unladen front/rear                        |  |           | kg       | 40 / 100        |           |           |         | 38 / 70     |          |           |      |
| Wheels/chassis   | 3.1    | Tyres                                               |  |           |          | N-BN            | V-BV      | N-BN      | V-BV    | N-BN        | V-BV     | N-BN      | V-BV |
|                  | 3.2    | Tyre size, front                                    |  |           |          | Ø 150x45        |           |           |         |             |          |           |      |
|                  | 3.3    | Tyre size, rear                                     |  |           |          | Ø 75x68         |           |           |         |             |          |           |      |
|                  | 3.5    | Wheels, number front/back (x=driven)                |  |           |          | 2/4             |           |           |         |             |          |           |      |
|                  | 3.6    | Tread width, front                                  |  | b10       | mm       | 145             |           |           |         |             |          |           |      |
|                  | 3.7    | Tread width, rear                                   |  | b11       | mm       | 440             |           |           |         |             |          |           |      |
| Basic dimensions | 4.4    | Lift (h3)                                           |  | h3        | mm       | 710             |           |           |         |             |          |           |      |
|                  | 4.9    | Height of tiller handle in drive position min./max. |  | h14       | mm       | 1270            |           |           |         | 1230        |          |           |      |
|                  | 4.15   | Height, lowered                                     |  | h13       | mm       | 85              |           |           |         |             |          |           |      |
|                  | 4.19   | Total length                                        |  | l1        | mm       | 1645            |           |           |         | 1580        |          |           |      |
|                  | 4.20   | Length including fork shank                         |  | l2        | mm       | 445             |           |           |         | 340         |          |           |      |
|                  | 4.21.1 | total width                                         |  | b1        | mm       | 540             |           |           |         |             |          |           |      |
|                  | 4.22   | Fork dimensions                                     |  | s/<br>e/l | mm       | 50 x 163 x 1200 |           |           |         |             |          |           |      |
|                  | 4.25   | Width across forks                                  |  | b5        | mm       | 540             |           |           |         |             |          |           |      |
|                  | 4.32   | Ground clearance centre of wheelbase                |  | m2        | mm       | 19              |           |           |         |             |          |           |      |
|                  | 4.34.1 | Aisle width (pallet 1000x1200 sideways)             |  | Ast       | mm       | 1690            |           |           |         | 1630        |          |           |      |
|                  | 4.34.2 | Aisle width (pallet 800x1200 length)                |  | Ast       | mm       | 1890            |           |           |         | 1830        |          |           |      |
|                  | 4.35   | Turning radius                                      |  | Wa        | mm       | 1540            |           |           |         | 1480        |          |           |      |
| Performance data | 5.3    | Lowering speed laden/unladen                        |  |           | m/s      | 0.07 / 0.05     |           |           |         | 0.15 / 0.09 |          |           |      |

|                                                                                                                                                                                                   |     |                                  |        |         |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------------------------|--------|---------|---|
| Electric motor/electronics                                                                                                                                                                        | 6.4 | Battery voltage/nominal capacity | V / Ah | 12 / 65 | - |
|                                                                                                                                                                                                   | 6.5 | Battery weight                   | kg     | 21      | - |
| - This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values. |     |                                  |        |         |   |

- VDI no. 1.5: From a lift height of 470 mm, the capacity is reduced to 1,000 kg.

The German production facilities in  
Norderstedt, Moosburg and Landsberg  
are certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet  
European safety requirements.



 **JUNGHEINRICH**