




## Hand pallet truck galvanised **AM G20**

Lift height: 122 mm / Load capacity: 2000 kg

**JUNGHEINRICH**

# AM G20

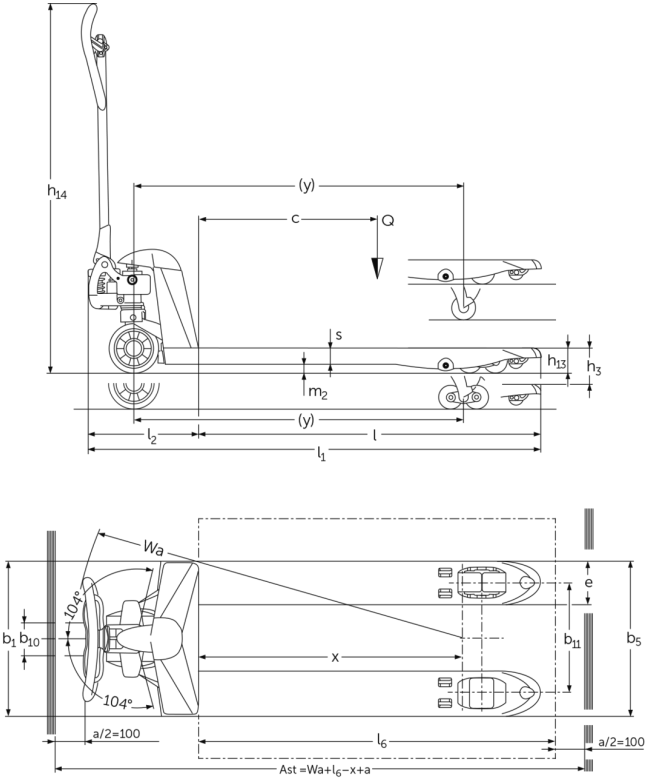

# VDI table

|                          |        |                                                     |             |                    |       |                  |                  |                |
|--------------------------|--------|-----------------------------------------------------|-------------|--------------------|-------|------------------|------------------|----------------|
| Characteristic           | 1.1    | Manufacturer (abbreviated description)              |             | Jungheinrich       |       |                  |                  |                |
|                          | 1.2    | Manufacturer's type designation                     |             | AM G20 (520x1,150) |       | AM G20 (520x950) | AM G20 (520x795) |                |
|                          | 1.3    | Drive type                                          |             | Manual             |       |                  |                  |                |
|                          | 1.4    | Operation                                           |             | Manual             |       |                  |                  |                |
|                          | 1.5    | Load capacity/load                                  | Q    kg     | 2000               |       |                  |                  |                |
|                          | 1.6    | Load centre distance                                | c    mm     | 600                |       | 500              | 400              |                |
|                          | 1.9    | Wheelbase                                           | y    mm     | 1110               | -     | 1110             | 910              | 755            |
| Weights                  | 2.1    | Netto weight                                        | kg          | 61                 | 60    |                  | 54               | 51             |
|                          | 2.3    | Axle load unladen front/rear                        | kg          | 38 / 20            | - / - | 38 / 20          | - / -            |                |
| Wheels/suspension system | 3.1    | Tyres                                               |             | N-GN               | N-BN  | V-BV             | N-GN             |                |
|                          | 3.2    | Tyre size, front                                    |             | Ø 170x50           | -     | Ø 170 x 50       | Ø 170x50         |                |
|                          | 3.3    | Tyre size, rear                                     |             | Ø 82x96            | -     | Ø 82 x 62        | Ø 82x96          |                |
|                          | 3.5    | Wheels, number front/back (x=driven)                |             | 2/2                | -     | 2/2              |                  |                |
|                          | 3.6    | Tread width, front                                  | b10   mm    | 109                | -     | 109              |                  |                |
|                          | 3.7    | Tread width, rear                                   | b11   mm    | 370                | -     | 370              |                  |                |
| Basic dimensions         | 4.4    | Lift (h3)                                           | h3    mm    | 122                |       |                  |                  |                |
|                          | 4.9    | Height of tiller handle in drive position min./max. | h14   mm    | 1234               | -     | 1234             |                  |                |
|                          | 4.14   | Stand height, elevated                              | h12   mm    | 205                |       |                  |                  |                |
|                          | 4.15   | Height, lowered                                     | h13   mm    | 83                 |       |                  |                  |                |
|                          | 4.19   | Total length                                        | l1    mm    | 1520               | 1523  | 1320             | 1165             |                |
|                          | 4.20   | Length including fork shank                         | l2    mm    | 373                |       |                  |                  |                |
|                          | 4.21.1 | total width                                         | b1    mm    | 520                |       |                  |                  |                |
|                          | 4.22   | Fork dimensions                                     | s/ e/l   mm | 53 x 150 x 1150    |       | 53 x 150 x 950   |                  | 53 x 150 x 795 |
|                          | 4.25   | Width across forks                                  | b5    mm    | 520                |       |                  |                  |                |
|                          | 4.32   | Ground clearance centre of wheelbase                | m2    mm    | 30                 |       |                  |                  |                |
|                          | 4.34.1 | Aisle width (pallet 1000x1200 sideways)             | Ast    mm   | 1734               | -     | 1734             | 1584             |                |
|                          | 4.34.2 | Aisle width (pallet 800x1200 length)                | Ast    mm   | 1784               | -     | 1784             |                  |                |
|                          | 4.35   | Turning radius                                      | Wa    mm    | 1274               | -     | 1274             | 1074             | 919            |
| Performance data         | 5.3    | Lowering speed laden/unladen                        | m/s         | 0.09 / 0.02        | - / - | 0.09 / 0.02      |                  |                |

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in  
Norderstedt, Moosburg and Landsberg  
are certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet  
European safety requirements.



 **JUNGHEINRICH**