





## Electric reach truck

**ETV Q20 / Q25**

Lift height: 4250-10700 mm / Load capacity: 2000-2500 kg

ETV Q20 / Q25

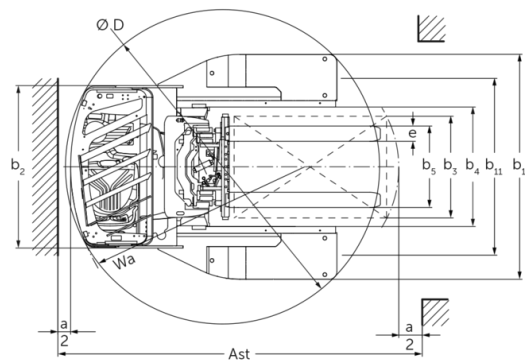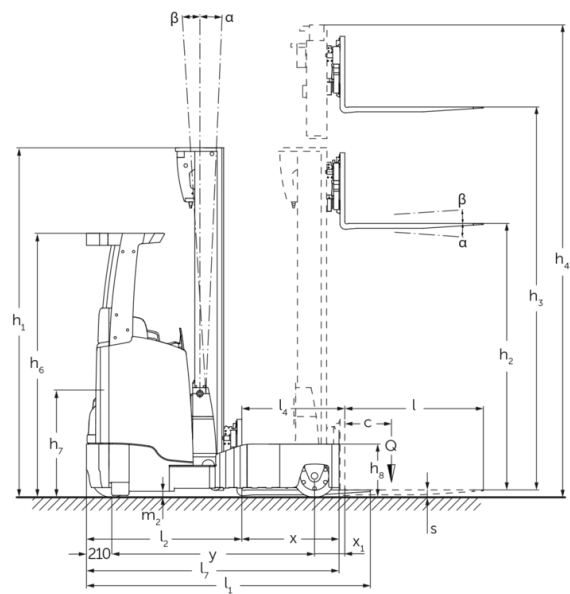

# ETV Q20 / Q25

| ETV Q20, ETV Q25                                             | Lift (h3) | Retracted mast height (h1) | Free lift (h2) | Extended mast height (h4) | Forward/backward tilt of mast | Forward/backward tilt of fork carriage |
|--------------------------------------------------------------|-----------|----------------------------|----------------|---------------------------|-------------------------------|----------------------------------------|
| Fork tilt / Triplex mast DZ / cold-formed                    | 6200 mm   | 2700 mm                    | 1970 mm        | 6930 mm                   |                               | 2 / 5 °                                |
|                                                              | 6500 mm   | 2800 mm                    | 2070 mm        | 7230 mm                   |                               | 2 / 5 °                                |
|                                                              | 6800 mm   | 2900 mm                    | 2170 mm        | 7530 mm                   |                               | 2 / 5 °                                |
|                                                              | 7400 mm   | 3100 mm                    | 2370 mm        | 8130 mm                   |                               | 2 / 5 °                                |
|                                                              | 7700 mm   | 3200 mm                    | 2470 mm        | 8430 mm                   |                               | 2 / 5 °                                |
|                                                              | 8000 mm   | 3300 mm                    | 2570 mm        | 8730 mm                   |                               | 2 / 5 °                                |
|                                                              | 8420 mm   | 3440 mm                    | 2710 mm        | 9150 mm                   |                               | 2 / 5 °                                |
|                                                              | 8720 mm   | 3540 mm                    | 2810 mm        | 9450 mm                   |                               | 2 / 5 °                                |
|                                                              | 9110 mm   | 3670 mm                    | 2940 mm        | 9840 mm                   |                               | 2 / 5 °                                |
|                                                              | 9620 mm   | 3840 mm                    | 3110 mm        | 10350 mm                  |                               | 2 / 5 °                                |
|                                                              | 9950 mm   | 3950 mm                    | 3220 mm        | 10680 mm                  |                               | 2 / 5 °                                |
|                                                              | 10220 mm  | 4100 mm                    | 3370 mm        | 10950 mm                  |                               | 2 / 5 °                                |
|                                                              | 10520 mm  | 4200 mm                    | 3470 mm        | 11250 mm                  |                               | 2 / 5 °                                |
|                                                              | 10700 mm  | 4260 mm                    | 3530 mm        | 11430 mm                  |                               | 2 / 5 °                                |
| Mast tilt without side shift / Triplex mast DZ / cold-formed | 4250 mm   | 2050 mm                    | 1320 mm        | 4980 mm                   | 1 / 5 °                       |                                        |
|                                                              | 4700 mm   | 2200 mm                    | 1470 mm        | 5430 mm                   | 1 / 5 °                       |                                        |
|                                                              | 5000 mm   | 2300 mm                    | 1570 mm        | 5730 mm                   | 1 / 5 °                       |                                        |
|                                                              | 5300 mm   | 2400 mm                    | 1670 mm        | 6030 mm                   | 1 / 5 °                       |                                        |
|                                                              | 5600 mm   | 2500 mm                    | 1770 mm        | 6330 mm                   | 1 / 3 °                       |                                        |
|                                                              | 5900 mm   | 2600 mm                    | 1870 mm        | 6630 mm                   | 1 / 3 °                       |                                        |
|                                                              | 6200 mm   | 2700 mm                    | 1970 mm        | 6930 mm                   | 1 / 3 °                       |                                        |
|                                                              | 6500 mm   | 2800 mm                    | 2070 mm        | 7230 mm                   | 1 / 3 °                       |                                        |
|                                                              | 6800 mm   | 2900 mm                    | 2170 mm        | 7530 mm                   | 1 / 3 °                       |                                        |
|                                                              | 6950 mm   | 2950 mm                    | 2220 mm        | 7680 mm                   | 1 / 3 °                       |                                        |
|                                                              | 7400 mm   | 3100 mm                    | 2370 mm        | 8130 mm                   | 1 / 3 °                       |                                        |
|                                                              | 8000 mm   | 3300 mm                    | 2570 mm        | 8730 mm                   | 1 / 3 °                       |                                        |

|  |         |         |         |         |         |
|--|---------|---------|---------|---------|---------|
|  | 8420 mm | 3440 mm | 2710 mm | 9150 mm | 1 / 3 ° |
|  | 8720 mm | 3540 mm | 2810 mm | 9450 mm | 1 / 3 ° |
|  | 9110 mm | 3670 mm | 2940 mm | 9840 mm | 1 / 3 ° |

## VDI table

|                  |        |                                                            |       |    |                   |         |
|------------------|--------|------------------------------------------------------------|-------|----|-------------------|---------|
| Characteristic   | 1.1    | Manufacturer (abbreviated description)                     |       |    | Jungheinrich      |         |
|                  | 1.2    | Manufacturer's type designation                            |       |    | ETV Q20           | ETV Q25 |
|                  | 1.3    | Drive type                                                 |       |    | electric          |         |
|                  | 1.4    | Operation                                                  |       |    | Sideways-seated   |         |
|                  | 1.5    | Load capacity/load                                         | Q     | kg | 2000              | 2500    |
|                  | 1.6    | Load centre distance                                       | c     | mm | 600               |         |
|                  | 1.8    | Load distance, centre of drive axle to fork                | x     | mm | 449               |         |
|                  | 1.8.1  | Load distance, centre of drive axle to fork, mast extended |       | mm | 230               |         |
|                  | 1.9    | Wheelbase                                                  | y     | mm | 1528              | 1638    |
| Weights          | 2.1.1  | Service weight (incl. battery)                             |       | kg | 3700              |         |
|                  | 2.3    | Axle load unladen front/rear                               |       | kg | 2264 / 1436       |         |
|                  | 2.4    | Axle load fork forward laden front/rear                    |       | kg | 602 / 5598        |         |
|                  | 2.5    | Axle load fork back laden front/rear                       |       | kg | 2032 / 4168       |         |
|                  |        |                                                            |       |    |                   |         |
| Wheels/chassis   | 3.1    | Tyres                                                      |       |    | Polyurethane (PU) |         |
|                  | 3.2    | Tyre size, front                                           |       |    | Ø 343 x 140       |         |
|                  | 3.3    | Tyre size, rear                                            |       |    | Ø 355 x 135       |         |
|                  | 3.5    | Wheels, number front/back (x=driven)                       |       |    | 1x / 2            |         |
|                  | 3.7    | Tread width, rear                                          | b11   | mm | 1420              |         |
| Basic dimensions | 4.1    | Forward/backward tilt of mast                              | a/β   | °  | 1 / 5             |         |
|                  | 4.2    | Retracted mast height (h1)                                 | h1    | mm | 2400              |         |
|                  | 4.3    | Free lift (h2)                                             | h2    | mm | 1670              |         |
|                  | 4.4    | Lift (h3)                                                  | h3    | mm | 5300              |         |
|                  | 4.5    | Extended mast height (h4)                                  | h4    | mm | 6030              |         |
|                  | 4.7    | Height of overhead guard (cab)                             | h6    | mm | 2190              |         |
|                  | 4.8    | Seat height/stand height                                   | h7    | mm | 1057              |         |
|                  | 4.10   | Height of support arms                                     | h8    | mm | 440               |         |
|                  | 4.19   | Total length                                               | l1    | mm | 2439              | 2511    |
|                  | 4.20   | Length including fork shank                                | l2    | mm | 1289              | 1361    |
|                  | 4.21.1 | total width                                                | b1    | mm | 1770              |         |
|                  | 4.21.2 | total width                                                | b2    | mm | 1270              |         |
|                  | 4.22   | Fork dimensions                                            | s/e/l | mm | 50 x 140 x 1150   |         |
|                  | 4.23   | Fork carriage connection class                             |       |    | 2B                |         |
|                  | 4.24   | Fork carriage width                                        | b3    | mm | 830               |         |
|                  | 4.25   | Width across forks                                         | b5    | mm | 356               |         |
|                  | 4.25.1 | Width across forks (min./max.)                             | b5    | mm | 356 / 750         |         |
|                  | 4.26   | Width between support arms/loading areas                   | b4    | mm | 940               |         |
|                  | 4.28   | Reach distance                                             |       | mm | 679               | 762     |
|                  | 4.32   | Ground clearance centre of wheelbase                       | m2    | mm | 95                |         |
|                  | 4.34.1 | Aisle width (pallet 1000x1200 sideways)                    | Ast   | mm | 2756              | 2854    |

|                                                                                                                                                                                                   |        |                                           |     |        |             |             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------------------------------------------|-----|--------|-------------|-------------|
|                                                                                                                                                                                                   | 4.34.2 | Aisle width (pallet 800x1200 length)      | Ast | mm     | 2792        | 2872        |
|                                                                                                                                                                                                   | 4.35   | Turning radius                            | Wa  | mm     | 1741        | 1893        |
|                                                                                                                                                                                                   | 4.37   | Length over the support arms              | L7  | mm     | 1957        | 2112        |
| Performance data                                                                                                                                                                                  | 5.1    | Travel speed laden/unladen                |     | km/h   | 14 / 14     |             |
|                                                                                                                                                                                                   | 5.2    | Lift speed laden/unladen                  |     | m/s    | 0.38 / 0.64 | 0.35 / 0.64 |
|                                                                                                                                                                                                   | 5.3    | Lowering speed laden/unladen              |     | m/s    | 0.55 / 0.55 |             |
|                                                                                                                                                                                                   | 5.4    | Reach speed laden/unladen                 |     | m/s    | 0.2 / 0.2   |             |
|                                                                                                                                                                                                   | 5.7    | Gradeability laden/unladen                |     | %      | 7 / 11      |             |
|                                                                                                                                                                                                   | 5.8    | Max. gradeability laden/unladen           |     | %      | 10 / 15     |             |
|                                                                                                                                                                                                   | 5.9    | Acceleration time laden/unladen           |     | s      | 5.3 / 4.8   | 5.6 / 4.9   |
|                                                                                                                                                                                                   | 5.10   | Service brake                             |     |        | electric    |             |
| Electric motor/electronics                                                                                                                                                                        | 6.1    | Drive motor, performance S2 60 min        |     | kW     | 8.5         |             |
|                                                                                                                                                                                                   | 6.2    | Lift motor, performance with S3           |     | kW     | 15.5        |             |
|                                                                                                                                                                                                   | 6.3    | Battery according to DIN 43531/35/36      |     |        | DIN 43531 C |             |
|                                                                                                                                                                                                   | 6.4    | Battery voltage/nominal capacity          |     | V / Ah | 48 / 620    |             |
|                                                                                                                                                                                                   | 6.5    | Battery weight                            |     | kg     | 1005        |             |
|                                                                                                                                                                                                   | 6.6    | Energy consumption according to VDI cycle |     | kWh/h  | 5.1         | 6           |
|                                                                                                                                                                                                   | 6.6.1  | Energy consumption according to EN cycle  |     | kWh/h  | 4.31        | 5           |
|                                                                                                                                                                                                   | 6.6.2  | CO2 equivalent as per EN 16796            |     | kg/h   | 2.3         | 2.7         |
|                                                                                                                                                                                                   | 6.7    | Throughput                                |     | t/h    | 79.73       | 97.61       |
|                                                                                                                                                                                                   | 6.8.1  | Energy consumption with max. throughput   |     | kWh/h  | 4.71        | 4.98        |
| Other                                                                                                                                                                                             | 8.1    | Type of drive control                     |     |        | Mosfet/AC   |             |
|                                                                                                                                                                                                   | 10.1   | Operating pressure for attachment         |     | bar    | 150         |             |
|                                                                                                                                                                                                   | 10.2   | Oil flow for attachments                  |     | l/min  | 20          |             |
|                                                                                                                                                                                                   |        |                                           |     |        |             |             |
|                                                                                                                                                                                                   | 10.7   | Sound pressure level according to EN12053 |     | dB (A) | 70          |             |
| - This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values. |        |                                           |     |        |             |             |

- VDI no. 1.8: battery size and mast type affect load distance x
- VDI no. 2.1.1: battery size and mast version affect service weight and axle loads
- VDI no. 2.3: battery size and mast version affect service weight and axle loads
- VDI no. 2.4: battery size and mast version affect service weight and axle loads
- VDI no. 2.5: battery size and mast version affect service weight and axle loads
- VDI no. 4.1: the mast version determines the tilt values
- VDI no. 4.19: battery size, mast type and fork length affect the overall length l1
- VDI no. 4.20: battery size and mast type affect the length including fork shank l2
- VDI no. 4.28: battery size and mast type affect the reach distance l4
- VDI no. 4.34.1: battery size and mast type affect the aisle widths
- VDI no. 4.34.2: battery size and mast type affect the aisle widths
- The information in this document relates to the drive&liftPLUS performance package

The German production facilities in  
Norderstedt, Moosburg and Landsberg  
are certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet  
European safety requirements.



 **JUNGHEINRICH**