




## **Electric pedestrian pallet truck**

**EJE 222 / 225 / 230 / 235**

Lift height: 122 mm / Load capacity: 2200-3500 kg

EJE 222 / 225 / 230 / 235

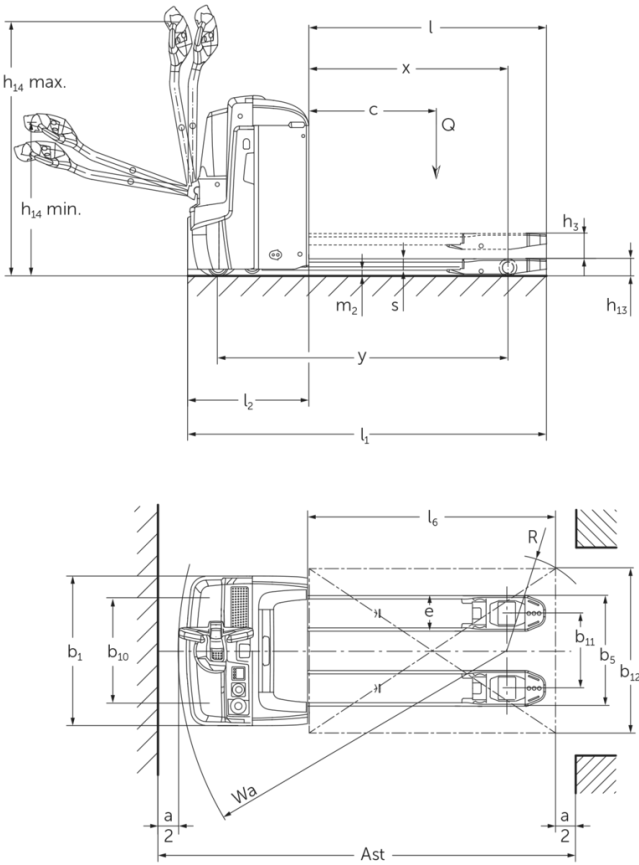

## VDI table

|                  |         |                                                     |                                |                 |            |                   |             |
|------------------|---------|-----------------------------------------------------|--------------------------------|-----------------|------------|-------------------|-------------|
| Characteristic   | 1.1     | Manufacturer (abbreviated description)              |                                | Jungheinrich    |            |                   |             |
|                  | 1.2     | Manufacturer's type designation                     |                                | EJE 222         | EJE 225    | EJE 230           | EJE 235     |
|                  | 1.3     | Drive type                                          |                                | electric        |            |                   |             |
|                  | 1.4     | Operation                                           |                                | Pedestrian      |            |                   |             |
|                  | 1.5     | Load capacity/load                                  | Q    kg                        | 2200            | 2500       | 3000              | 3500        |
|                  | 1.6     | Load centre distance                                | c    mm                        | 600             |            |                   |             |
|                  | 1.8     | Load distance, centre of drive axle to fork         | x    mm                        | 908             |            | 909               |             |
|                  | 1.9     | Wheelbase                                           | y    mm                        | 1351            |            | 1352              |             |
|                  | Weights | 2.1.1                                               | Service weight (incl. battery) | kg              | 535        |                   | 565         |
| 2.2              |         | Axle load laden front/rear                          | kg                             | 879 / 1870      | 970 / 2072 | 1116 / 2449       | 1230 / 2833 |
| 2.3              |         | Axle load unladen front/rear                        | kg                             | 408 / 127       |            | 430 / 135         |             |
| Wheels/chassis   | 3.1     | Tyres                                               |                                | -               |            | Polyurethane (PU) |             |
|                  | 3.2     | Tyre size, front                                    |                                | Ø 230 x 70      |            |                   |             |
|                  | 3.3     | Tyre size, rear                                     |                                | Ø 85 x 110      |            | Ø 85 x 85         |             |
|                  | 3.4     | Additional wheels                                   |                                | Ø 100 x 40      |            |                   |             |
|                  | 3.5     | Wheels, number front/back (x=driven)                |                                | 1x +2 / 2       |            | 1x +2 / 4         |             |
|                  | 3.6     | Tread width, front                                  | b10   mm                       | 510             |            |                   |             |
|                  | 3.7     | Tread width, rear                                   | b11   mm                       | 363             |            |                   |             |
| Basic dimensions | 4.4     | Lift (h3)                                           | h3   mm                        | 122             |            |                   |             |
|                  | 4.9     | Height of tiller handle in drive position min./max. | h14   mm                       | 750 / 1237      |            |                   |             |
|                  | 4.15    | Height, lowered                                     | h13   mm                       | 85              |            |                   |             |
|                  | 4.19    | Total length                                        | l1    mm                       | 1737            |            |                   |             |
|                  | 4.20    | Length including fork shank                         | l2    mm                       | 587             |            |                   |             |
|                  | 4.21.1  | total width                                         | b1    mm                       | 724             |            |                   |             |
|                  | 4.22    | Fork dimensions                                     | s/e/ l   mm                    | 55 x 172 x 1150 |            |                   |             |
|                  | 4.25    | Width across forks                                  | b5    mm                       | 535             |            |                   |             |
|                  | 4.32    | Ground clearance centre of wheelbase                | m2    mm                       | 30              |            |                   |             |
|                  | 4.34.1  | Aisle width (pallet 1000x1200 sideways)             | Ast    mm                      | 2338            |            |                   |             |
|                  | 4.34.2  | Aisle width (pallet 800x1200 length)                | Ast    mm                      | 2227            |            |                   |             |
|                  | 4.35    | Turning radius                                      | Wa    mm                       | 1532            |            |                   |             |
| Performance data | 5.1     | Travel speed laden/unladen                          | km/h                           | 6 / 6           |            |                   | 4 / 6       |
|                  | 5.2     | Lift speed laden/unladen                            | m/s                            | 0.05 / 0.07     |            | 0.04 / 0.07       |             |
|                  | 5.3     | Lowering speed laden/unladen                        | m/s                            | 0.05 / 0.04     |            | 0.06 / 0.04       |             |
|                  | 5.8     | Max. gradeability laden/unladen                     | %                              | 8 / 20          |            | 6 / 20            | 5 / 20      |
|                  | 5.10    | Service brake                                       |                                | generative      |            |                   |             |

|                                                                                                                                                                                                   |                                         |                                           |        |          |      |      |     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-------------------------------------------|--------|----------|------|------|-----|
| Electric motor/electronics                                                                                                                                                                        | 6.1                                     | Drive motor, performance S2 60 min        | kW     | 1.7      |      |      |     |
|                                                                                                                                                                                                   | 6.2                                     | Lift motor, performance with S3           | kW     | 2.2      |      |      |     |
|                                                                                                                                                                                                   | 6.3                                     | Battery according to DIN 43531/35/36      |        | B        |      |      |     |
|                                                                                                                                                                                                   | 6.4                                     | Battery voltage/nominal capacity          | V / Ah | 24 / 250 |      |      |     |
|                                                                                                                                                                                                   | 6.5                                     | Battery weight                            | kg     | 220      |      |      |     |
|                                                                                                                                                                                                   | 6.6                                     | Energy consumption according to VDI cycle | kWh/h  | 0        |      |      |     |
|                                                                                                                                                                                                   | 6.6.1                                   | Energy consumption according to EN cycle  | kWh/h  | 0.35     | 0.37 | 0.38 | 0.4 |
|                                                                                                                                                                                                   | 6.6.2                                   | CO2 equivalent as per EN 16796            | kg/h   | 0.2      |      |      |     |
|                                                                                                                                                                                                   | 6.7                                     | Throughput                                | t/h    | 123      | 148  | 175  | 205 |
| 6.8.1                                                                                                                                                                                             | Energy consumption with max. throughput | kWh/h                                     | 0.77   | 0.82     | 0.98 | 1.14 |     |
| Other                                                                                                                                                                                             | 8.1                                     | Type of drive control                     |        | AC       |      |      |     |
|                                                                                                                                                                                                   | 10.7                                    | Sound pressure level according to EN12053 | dB (A) | 70       |      |      |     |
| - This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values. |                                         |                                           |        |          |      |      |     |

- 4.33: lowered load section: + 50 mm
- 1.8: 1.9: 4.35: lowered load section: + 56 mm
- 4.34: lowered load section: + 25 mm
- 1.9: 4.19: 4.19.1: 4.20: 4.33: 4.34: 4.35: with lateral battery exchange: L / M LBE = M + 72 mm; L LBE = M + 125 mm
- 5.1: up to a load of 3 t: max. travel speed = 6 km/h.

The German production facilities in  
Norderstedt, Moosburg and Landsberg  
are certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet  
European safety requirements.



 **JUNGHEINRICH**