




## Hand pallet truck with scales

### AMW 22 / 22p

Lift height: 122 mm / Load capacity: 2200 kg

**JUNGHEINRICH**

AMW 22 / 22p

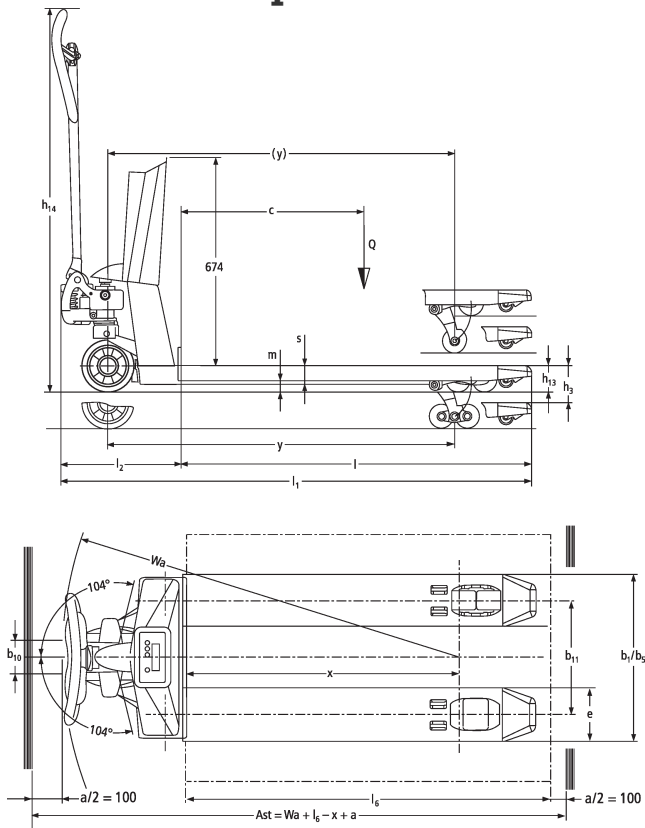

|                  |        |                                                     |           |     |                 |            |      |          |             |          |            |          |
|------------------|--------|-----------------------------------------------------|-----------|-----|-----------------|------------|------|----------|-------------|----------|------------|----------|
| Characteristic   | 1.1    | Manufacturer (abbreviated description)              |           |     |                 |            |      |          | other (OEM) |          |            |          |
|                  | 1.2    | Manufacturer's type designation                     |           |     | AMW 22          |            |      |          | AMW 22p     |          |            |          |
|                  | 1.3    | Drive type                                          |           |     |                 |            |      |          | Manual      |          |            |          |
|                  | 1.4    | Operation                                           |           |     |                 |            |      |          | Manual      |          |            |          |
|                  | 1.5    | Load capacity/load                                  | Q         | kg  |                 |            |      |          | 2200        |          |            |          |
|                  | 1.6    | Load centre distance                                | c         | mm  |                 |            |      |          | 600         |          |            |          |
|                  | 1.9    | Wheelbase                                           | y         | mm  |                 |            |      |          | 1110        |          |            |          |
| Weights          | 2.1    | Netto weight                                        |           | kg  | 99              |            |      |          | 102         |          |            |          |
|                  | 2.2    | Axle load laden front/rear                          |           | kg  |                 |            |      |          | 578 / 1721  |          |            |          |
|                  | 2.3    | Axle load unladen front/rear                        |           | kg  |                 |            |      |          | 61 / 38     |          |            |          |
| Wheels/chassis   | 3.1    | Tyres                                               |           |     | C-BV            | V-GV       | C-GV | V-BV     | C-GV        | C-BV     | V-GV       | V-BV     |
|                  | 3.2    | Tyre size, front                                    |           |     | Ø 170x50        | Ø 170 x 50 |      | Ø 170x50 | Ø 170 x 50  | Ø 170x50 | Ø 170 x 50 | Ø 170x50 |
|                  | 3.3    | Tyre size, rear                                     |           |     | Ø 82x96         | Ø 82 x 96  |      | Ø 82x96  | Ø 82 x 96   | Ø 82x96  | Ø 82 x 96  | Ø 82x96  |
|                  | 3.5    | Wheels, number front/back (x=driven)                |           |     | 2/2             |            |      |          |             |          |            |          |
|                  | 3.6    | Tread width, front                                  | b10       | mm  | 109             |            |      |          |             |          |            |          |
|                  | 3.7    | Tread width, rear                                   | b11       | mm  | 370             |            |      |          |             |          |            |          |
| Basic dimensions | 4.4    | Lift (h3)                                           | h3        | mm  | 122             |            |      |          |             |          |            |          |
|                  | 4.9    | Height of tiller handle in drive position min./max. | h14       | mm  | 1234            |            |      |          |             |          |            |          |
|                  | 4.15   | Height, lowered                                     | h13       | mm  | 86              |            |      |          |             |          |            |          |
|                  | 4.19   | Total length                                        | l1        | mm  | 1546            |            |      |          |             |          |            |          |
|                  | 4.20   | Length including fork shank                         | l2        | mm  | 396             |            |      |          |             |          |            |          |
|                  | 4.21.1 | total width                                         | b1        | mm  | 540             |            |      |          |             |          |            |          |
|                  | 4.22   | Fork dimensions                                     | s/<br>e/l | mm  | 62 x 170 x 1150 |            |      |          |             |          |            |          |
|                  | 4.25   | Width across forks                                  | b5        | mm  | 540             |            |      |          |             |          |            |          |
|                  | 4.32   | Ground clearance centre of wheelbase                | m2        | mm  | 24              |            |      |          |             |          |            |          |
|                  | 4.34.1 | Aisle width (pallet 1000x1200 sideways)             | Ast       | mm  | 1763            |            |      |          |             |          |            |          |
|                  | 4.34.2 | Aisle width (pallet 800x1200 length)                | Ast       | mm  | 1813            |            |      |          |             |          |            |          |
|                  | 4.35   | Turning radius                                      | Wa        | mm  | 1303            |            |      |          |             |          |            |          |
| Performance data | 5.3    | Lowering speed laden/unladen                        |           | m/s | 0.09 / 0.02     |            |      |          |             |          |            |          |



The German production facilities in  
Norderstedt, Moosburg and Landsberg  
are certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet  
European safety requirements.



 **JUNGHEINRICH**