









## Electric ride-on/pedestrian pallet truck

**ERE MB 220 / 225**

Lift height: 122 mm / Load capacity: 2000-2500 kg

**ERE MB 220 / 225**

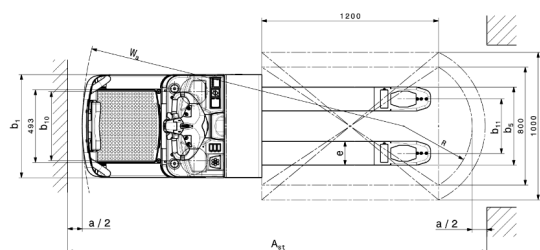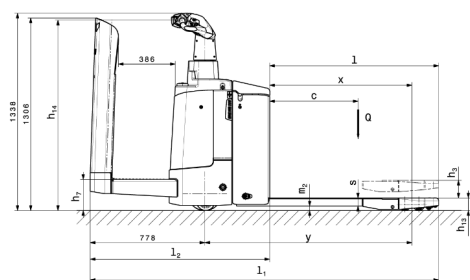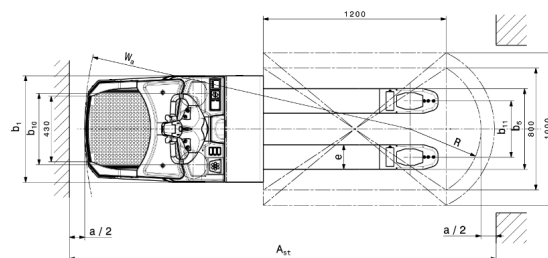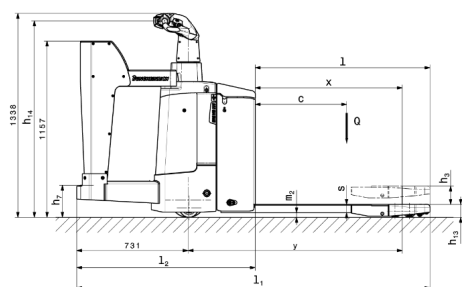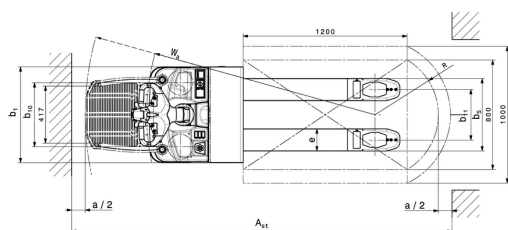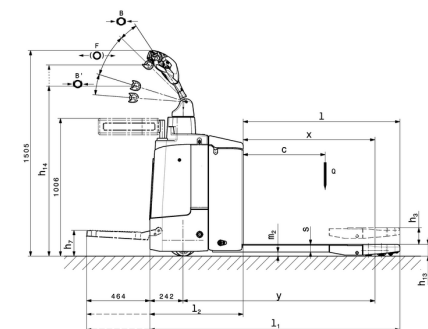

# VDI table

|                          |        |                                                     |          |                        |
|--------------------------|--------|-----------------------------------------------------|----------|------------------------|
| Characteristic           | 1.1    | Manufacturer (abbreviated description)              |          | Jungheinrich           |
|                          | 1.2    | Manufacturer's type designation                     |          | ERE MB                 |
|                          | 1.3    | Drive                                               |          | Electric               |
|                          | 1.4    | Operation                                           |          | Stand-on/pedestrian    |
|                          | 1.5    | Load capacity/load                                  | Q kg     | 2000   2500            |
|                          | 1.6    | Load centre distance                                | c mm     | 600                    |
|                          | 1.8    | Load distance, centre of drive axle to fork         | x mm     | 910                    |
|                          | 1.9    | Wheelbase                                           | y mm     | 1405                   |
| Weights                  | 2.1.1  | Service weight (incl. battery)                      | kg       | 817                    |
|                          | 2.2    | Axle load laden front/rear                          | kg       | 1173 / 2147            |
|                          | 2.3    | Axle load unladen front/rear                        | kg       | 675 / 142              |
| Wheels/suspension system | 3.1    | Tyres                                               |          | Polyurethane (PU)      |
|                          | 3.2    | Tyre size, front                                    |          | Ø 230 x 70             |
|                          | 3.3    | Tyre size, rear                                     |          | Ø 85 x 100 / Ø 82 x 70 |
|                          | 3.4    | Additional wheels                                   |          | Ø 125 x 54             |
|                          | 3.5    | Wheels, number front/back (x=driven)                |          | 1x+2/ 2 or 4           |
|                          | 3.6    | Tread width, front                                  | b10 mm   | 464                    |
|                          | 3.7    | Tread width, rear                                   | b11 mm   | 368                    |
| Basic dimensions         | 4.4    | Lift (h3)                                           | h3 mm    | 122                    |
|                          | 4.9    | Height of tiller handle in drive position min./max. | h14 mm   | 1240 / 1400            |
|                          | 4.15   | Height, lowered                                     | h13 mm   | 85                     |
|                          | 4.19   | total length                                        | l1 mm    | 1832                   |
|                          | 4.20   | Length including fork shank                         | l2 mm    | 682                    |
|                          | 4.21.1 | total width                                         | b1 mm    | 700                    |
|                          | 4.22   | Fork dimensions                                     | s/e/l mm | 55 x 162 x 1150        |
|                          | 4.25   | Width across forks                                  | b5 mm    | 530                    |
|                          | 4.32   | Ground clearance centre of wheelbase                | m2 mm    | 30                     |
|                          | 4.34.1 | Aisle width (pallet 1000x1200 sideways)             | Ast mm   | 2476                   |
|                          | 4.34.2 | Aisle width (pallet 800x1200 length)                | Ast mm   | 2364                   |
|                          | 4.35   | Turning radius                                      | Wa mm    | 1670                   |
| Performance data         | 5.1    | Travel speed laden/unladen                          | km/h     | 8.5 / 8.5   8 / 8.5    |
|                          | 5.2    | Lift speed laden/unladen                            | m/s      | 0.05 / 0.07            |
|                          | 5.3    | Lowering speed laden/unladen                        | m/s      | 0.06 / 0.05            |
|                          | 5.7    | Gradeability laden/unladen                          | %        | 8 / 16                 |
|                          | 5.10   | Service brake                                       |          | generative             |

|                     |       |                                            |        |          |     |
|---------------------|-------|--------------------------------------------|--------|----------|-----|
| E-motor/Electronics | 6.1   | Drive motor, performance S2 60 min         | kW     | 1.6      |     |
|                     | 6.2   | Lift motor, performance with S3            | kW     | 2.2      |     |
|                     | 6.3   | Battery according to DIN 43531/35/36       |        | B        |     |
|                     | 6.4   | Battery voltage/nominal capacity           | V / Ah | 24 / 250 |     |
|                     | 6.5   | Battery weight                             | kg     | 212      |     |
|                     | 6.6.1 | Energy consumption according to EN cycle   | kWh/h  | 0.61     |     |
|                     | 6.6.2 | CO2 equivalent as per EN 16796             | kg/h   | 0.3      |     |
|                     | 6.7   | Throughput                                 | t/h    | 105      | 131 |
| Other               | 8.1   | Type of drive control                      |        | AC       |     |
|                     | 10.7  | Sound level as per EN12053, operator's ear | dB (A) | 69       |     |

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

- VDI no. 1.8: 1.9: 4.34.1: 4.34.2: 4.35: Load section lowered: +55mm
- VDI no. 1.9: 4.19: 4.20: 4.34.1: 4.34.2: 4.35: Battery compartment L (375 Ah): +71mm
- VDI no. 4.34.1: Ast for intrusive stacking (empty pallet place): -366mm
- VDI no. 4.34.2: Ast for intrusive stacking (empty pallet place): -204mm
- VDI no. 4.19 for rear entry: 2319mm, for L shape: 2365 mm
- VDI no. 4.20 for rear entry: 1172mm, for L shape: 1218 mm
- VDI no. 4.34.1 for rear entry: 2942 mm, for L shape: 2988 mm
- VDI no. 4.34.2 for rear entry: 2830 mm, for L shape: 2876 mm
- VDI no. 4.35 for rear entry: 2136 mm, for L shape: 2182 mm

The German production facilities in  
Norderstedt, Moosburg and Landsberg  
are certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

 **JUNGHEINRICH**