




## **Electric pedestrian pallet truck**

### **AME 16**

Lift height: 115 mm / Load capacity: 1600 kg

AME 16

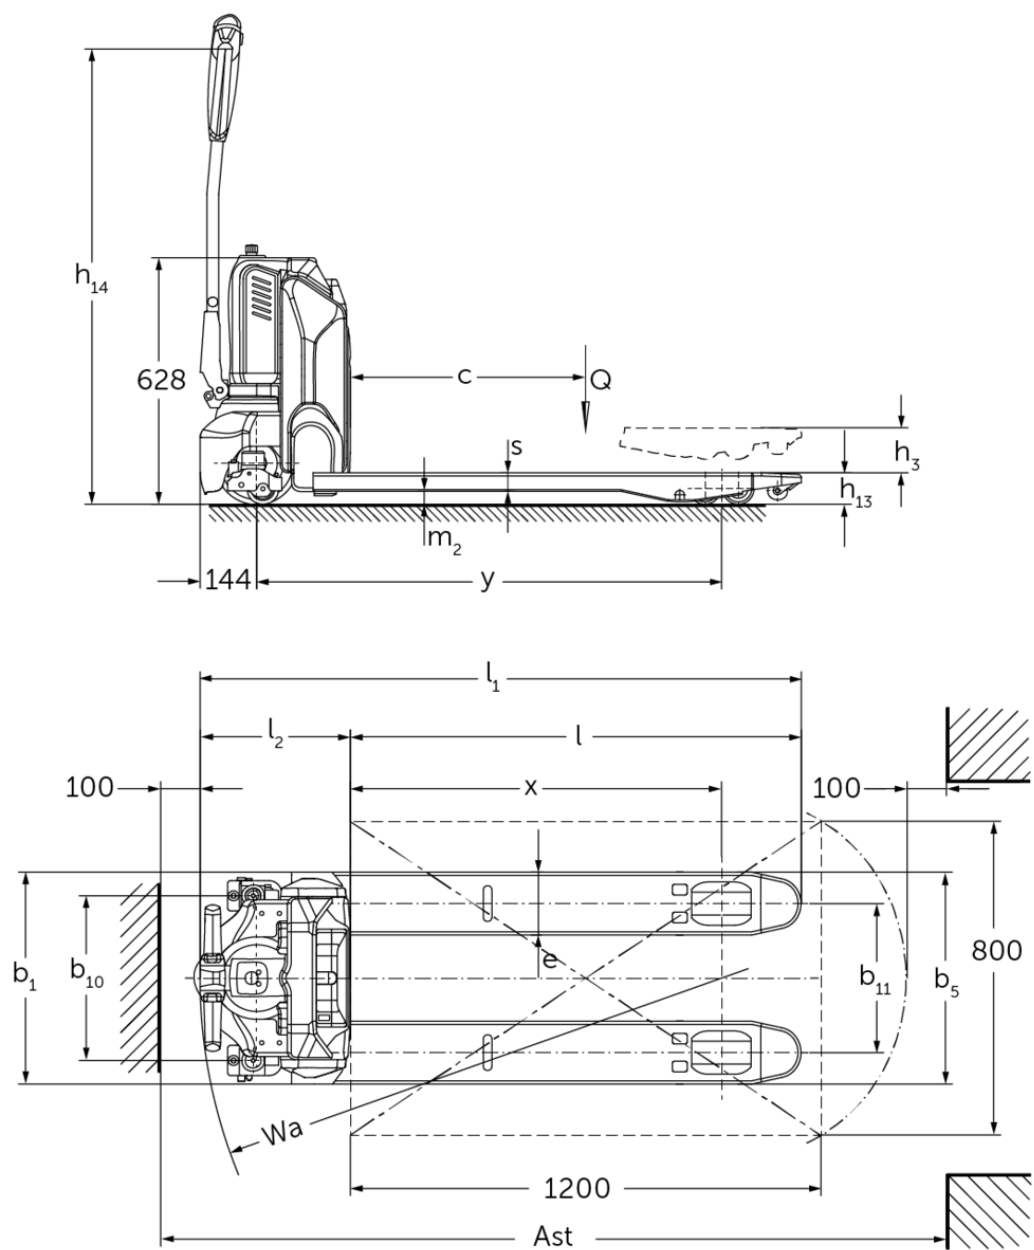

# VDI table

|                  |        |                                                     |                |                    |                    |                    |
|------------------|--------|-----------------------------------------------------|----------------|--------------------|--------------------|--------------------|
| Characteristic   | 1.1    | Manufacturer (abbreviated description)              |                | other (OEM)        |                    |                    |
|                  | 1.2    | Manufacturer's type designation                     |                | AME 16 (540x1,000) | AME 16 (540x1,150) | AME 16 (685x1,150) |
|                  | 1.3    | Drive type                                          |                | electric           |                    |                    |
|                  | 1.4    | Operation                                           |                | Pedestrian         |                    |                    |
|                  | 1.5    | Load capacity/load                                  | Q    kg        | 1600               |                    |                    |
|                  | 1.6    | Load centre distance                                | c    mm        | 600                |                    |                    |
|                  | 1.8    | Load distance, centre of drive axle to fork         | x    mm        | 801                | 951                |                    |
|                  | 1.9    | Wheelbase                                           | y    mm        | 1039               | 1189               |                    |
| Weights          | 2.1.1  | Service weight (incl. battery)                      | kg             | 145                | 149                | 153                |
|                  | 2.2    | Axle load laden front/rear                          | kg             | 680 / 1065         | 682 / 1067         | 682 / 1071         |
|                  | 2.3    | Axle load unladen front/rear                        | kg             | 111 / 34           | 115 / 34           | 119 / 34           |
| Wheels/chassis   | 3.1    | Tyres                                               |                | Polyurethane (PU)  |                    |                    |
|                  | 3.2    | Tyre size, front                                    |                | Ø210 x 70          |                    |                    |
|                  | 3.3    | Tyre size, rear                                     |                | Ø80 x 70           |                    |                    |
|                  | 3.4    | Additional wheels                                   |                | Ø80 x 30           |                    |                    |
|                  | 3.5    | Wheels, number front/back (x=driven)                |                | 1x +2 / 4          |                    |                    |
|                  | 3.6    | Tread width, front                                  | b10   mm       | 420                |                    |                    |
|                  | 3.7    | Tread width, rear                                   | b11   mm       | 380                |                    | 525                |
| Basic dimensions | 4.4    | Lift (h3)                                           | h3   mm        | 115                |                    |                    |
|                  | 4.9    | Height of tiller handle in drive position min./max. | h14   mm       | 780 / 1160         |                    |                    |
|                  | 4.15   | Height, lowered                                     | h13   mm       | 80                 |                    |                    |
|                  | 4.19   | Total length                                        | l1    mm       | 1386               | 1536               |                    |
|                  | 4.20   | Length including fork shank                         | l2    mm       | 386                |                    |                    |
|                  | 4.21.1 | total width                                         | b1    mm       | 540                |                    | 685                |
|                  | 4.22   | Fork dimensions                                     | s/<br>e/l   mm | 47 x 160 x 1000    | 47 x 160 x 1150    |                    |
|                  | 4.25   | Width across forks                                  | b5    mm       | 540                |                    | 685                |
|                  | 4.32   | Ground clearance centre of wheelbase                | m2    mm       | 33                 |                    |                    |
|                  | 4.34.2 | Aisle width (pallet 800x1200 length)                | Ast   mm       | 1856               | 2006               |                    |
|                  | 4.35   | Turning radius                                      | Wa    mm       | 1186               | 1336               |                    |
| Performance data | 5.1    | Travel speed laden/unladen                          | km/h           | 4.8 / 5.2          |                    |                    |
|                  | 5.2    | Lift speed laden/unladen                            | m/s            | 0.02 / 0.02        |                    |                    |
|                  | 5.3    | Lowering speed laden/unladen                        | m/s            | 0.04 / 0.03        |                    |                    |
|                  | 5.8    | Max. gradeability laden/unladen                     | %              | 8 / 16             |                    |                    |
|                  | 5.10   | Service brake                                       |                | electromagnetic    |                    |                    |

|                                                                                                                                                                                                   |      |                                           |        |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------------------------------|--------|------------|
| Electric motor/electronics                                                                                                                                                                        | 6.1  | Drive motor, performance S2 60 min        | kW     | 0.75       |
|                                                                                                                                                                                                   | 6.2  | Lift motor, performance with S3           | kW     | 0.8        |
|                                                                                                                                                                                                   | 6.3  | Battery according to DIN 43531/35/36      |        | no         |
|                                                                                                                                                                                                   | 6.4  | Battery voltage/nominal capacity          | V / Ah | 48 / 20    |
|                                                                                                                                                                                                   | 6.5  | Battery weight                            | kg     | 7.5        |
|                                                                                                                                                                                                   | 6.6  | Energy consumption according to VDI cycle | kWh/h  | 0.25       |
| Other                                                                                                                                                                                             | 8.1  | Type of drive control                     |        | Impulse/DC |
|                                                                                                                                                                                                   | 10.7 | Sound pressure level according to EN12053 | dB (A) | 70         |
| - This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values. |      |                                           |        |            |

The German production facilities in  
Norderstedt, Moosburg and Landsberg  
are certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet  
European safety requirements.



 **JUNGHEINRICH**