




Scissor lift hand pallet truck



AMX 10 / 10e

Lift height: 714 mm / Load capacity: 1000 kg

 JUNGHEINRICH

Technical diagram of a crane mechanism. The diagram shows a horizontal beam of length l_1 pivoted at the left end. A vertical mast is attached to the beam at a distance l_2 from the pivot. The mast has a height h_{14} and a total height of 1897. A horizontal arm of length l is attached to the mast at a height m_2 from the beam. A vertical force Q is applied at the end of the horizontal arm, at a distance c from the pivot. The horizontal arm is at a height h_3 from the beam. The distance from the pivot to the point where the horizontal arm is attached is y . The maximum height of the horizontal arm is 600 Maxi. The diagram also shows dashed lines indicating the movement of the horizontal arm and the mast.

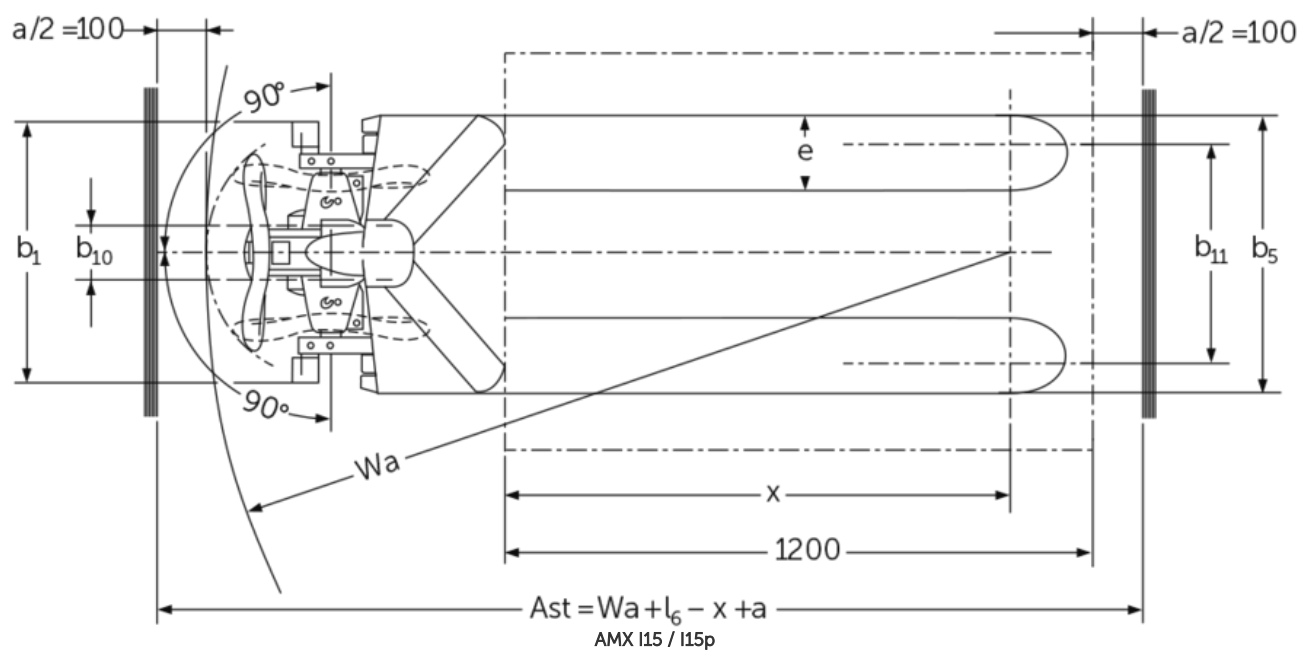

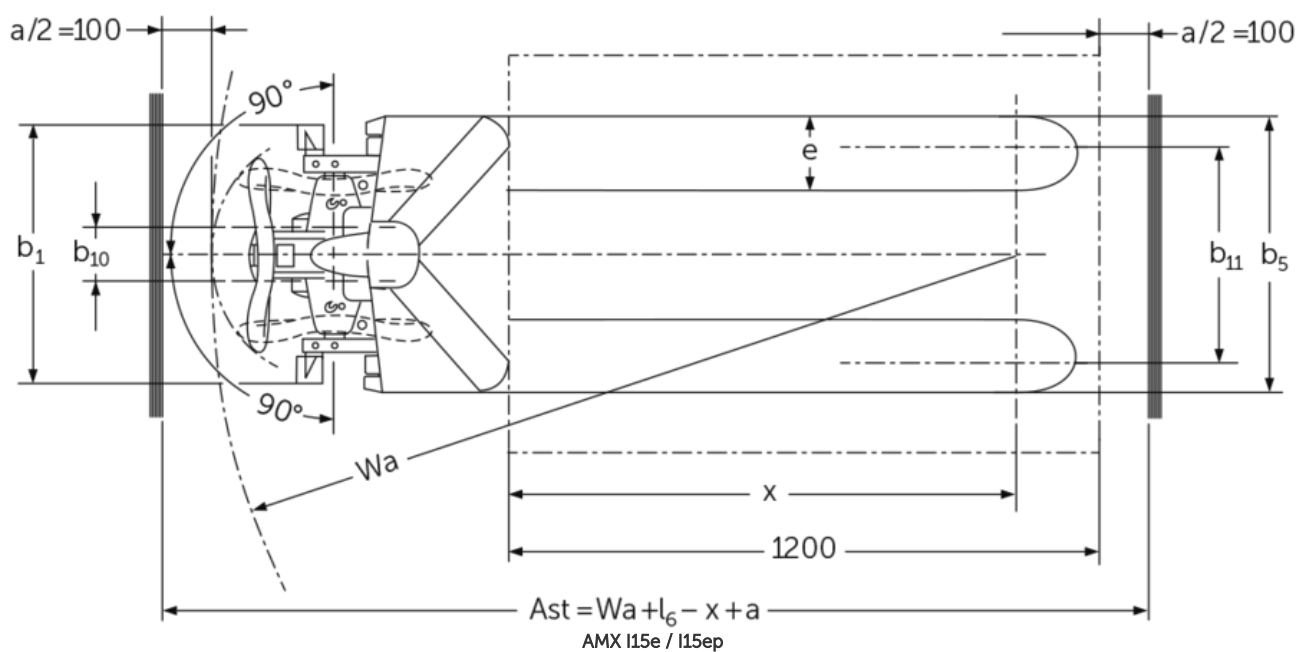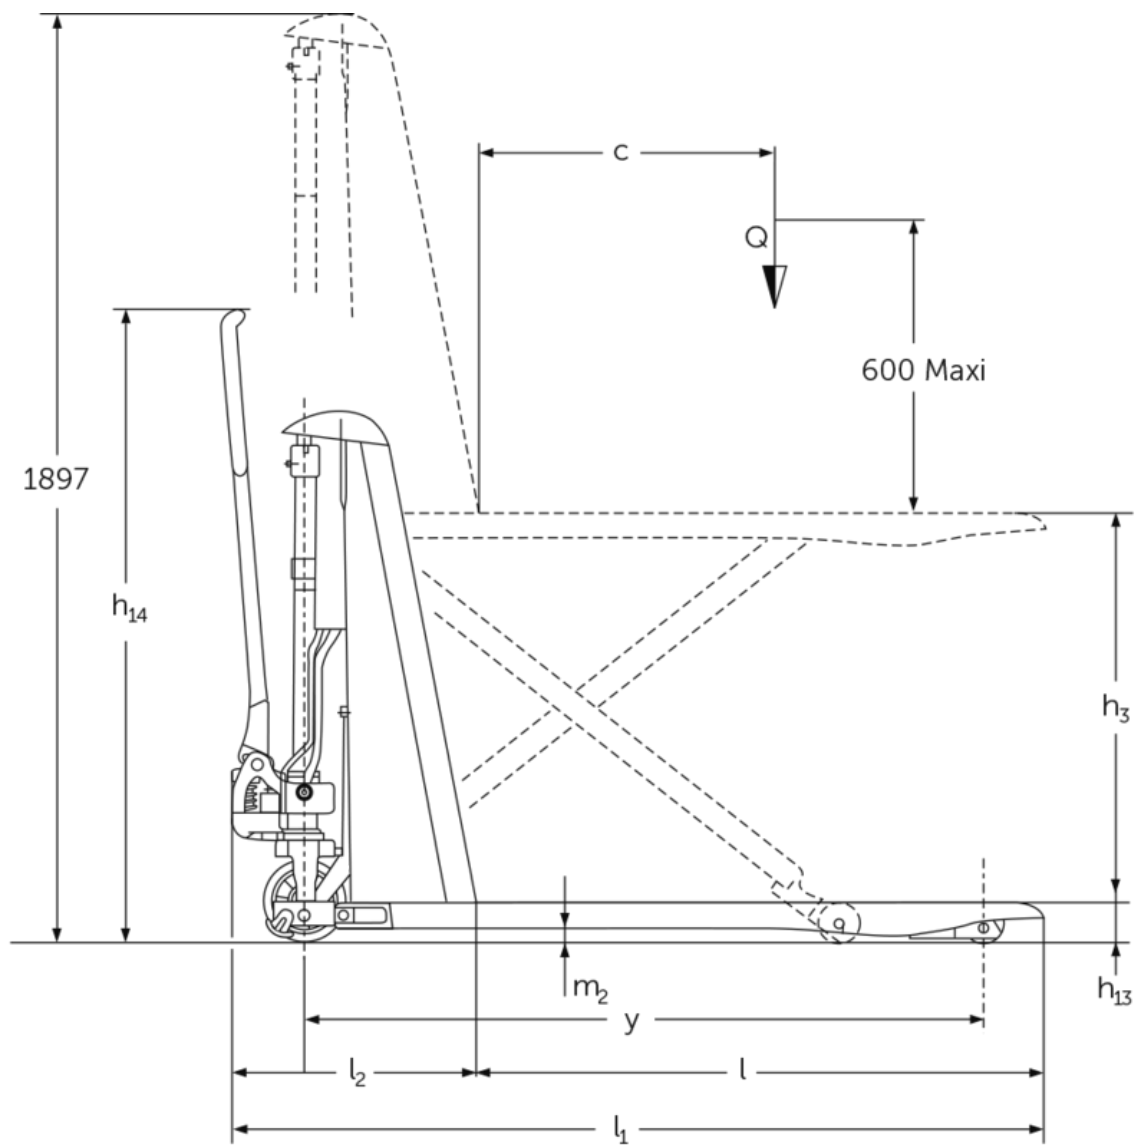

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		other (OEM)								
	1.2	Manufacturer's type designation		AMX 10e					AMX 10			
	1.3	Drive type		electric	Manual							
	1.4	Operation		Manual								
	1.5	Load capacity/load	Q	kg	1000							
	1.6	Load centre distance	c	mm	600							
	1.9	Wheelbase	y	mm	1383	-			1383	-		
Weights	2.1	Netto weight		kg	195					157		
	2.2	Axle load laden front/rear		kg	443 / 752	- / -			406 / 751	- / -		
	2.3	Axle load unladen front/rear		kg	136 / 59	- / -			101 / 56	- / -		
Wheels/chassis	3.1	Tyres			C-GN	N-GN	V-GV	N-GN	C-GN	V-GV	C-GN	N-GN
	3.2	Tyre size, front			Ø 170 x 50	-			Ø 170 x 50			-
	3.3	Tyre size, rear			Ø 82 x 62	-			Ø 82 x 62			-
	3.5	Wheels, number front/back (x=driven)			2/2	-			2/2			-
	3.6	Tread width, front	b10	mm	109	-			109			-
	3.7	Tread width, rear	b11	mm	440	-			440			-
Basic dimensions	4.4	Lift (h3)	h3	mm	714							
	4.5	Extended mast height (h4)	h4	mm	1897	-			1897			-
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1299	-			1299			-
	4.15	Height, lowered	h13	mm	86							
	4.19	Total length	l1	mm	1650							
	4.20	Length including fork shank	l2	mm	500	-			500			-
	4.21.1	total width	b1	mm	560		680		560			
	4.22	Fork dimensions	s/ e/l	mm	53 x 150 x 1150		150 x 1150			53 x 150 x 1150		150 x 1150
	4.25	Width across forks	b5	mm	560		680		560			
	4.32	Ground clearance centre of wheelbase	m2	mm	30	-			30			-
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	2005	-			2005			-
	4.35	Turning radius	Wa	mm	-					1635		-
Performance data	5.3	Lowering speed laden/unladen		m/s	0.13 / 0.05	- / -			0.11 / 0.04		- / -	

Electric motor/electronics	6.2	Lift motor, performance with S3	kW	0.5		-
	6.4	Battery voltage/nominal capacity	V / Ah	12 / 70		-
	6.5	Battery weight	kg	24	-	

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			other (OEM)			
	1.2	Manufacturer's type designation			AMX 10			
	1.3	Drive type			Manual			
	1.4	Operation			Manual			
	1.5	Load capacity/load	Q	kg	1000			
	1.6	Load centre distance	c	mm	600			
Weights	2.1	Netto weight	kg		157			
Wheels/chassis	3.1	Tyres			V-GV	N-GN	C-GN	V-GV
Basic dimensions	4.4	Lift (h3)	h3	mm	714			
	4.15	Height, lowered	h13	mm	86			
	4.19	Total length	l1	mm	1650			
	4.21.1	total width	b1	mm	560	680		
	4.22	Fork dimensions	s/e/ l	mm	150 x 1150			
	4.25	Width across forks	b5	mm	560	680		
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.								

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**