


## **Electric tow tractor EZS 010**


Towing capacity: 1000 kg





## **EZS 010** h<sub>14</sub>

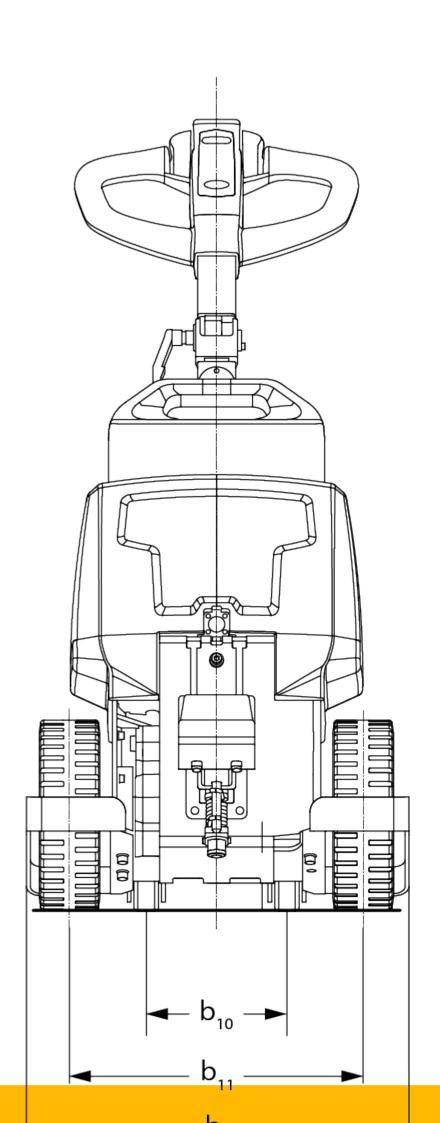

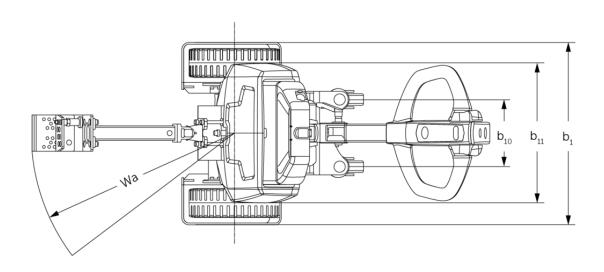

## **VDI** table

	1 1 1	Manufactures (abbusiated decariation)			atlass (OFM)
Characteristic	1.1	Manufacturer (abbreviated description)  Manufacturer's type designation			other (OEM) EZS 010
	1.3				
	1.4	Drive type Operation			electric Pedestrian
	1.5.3			ka	1000
	1.5.5	Towing capacity	Q	kg N	200
	1.7	Rated drawbar pull		IN	200
	1.9	Wheelbase	у	mm	325
Weights	2.1	Netto weight		kg	67
	2.3	Axle load unladen front/rear		kg	55 / 19
Wheels/chassis	3.2	Tyre size, front			250x80
	3.3	Tyre size, rear			75x32
	3.5	Wheels, number front/back (x=driven)			2x+2/-
	3.6	Tread width, front	b10	mm	185
	3.7	Tread width, rear	b11	mm	385
Basic dimensions	4.9	Height of tiller handle in drive position min./max.	h14	mm	750 / 1150
	4.19	Total length	l1	mm	915
	4.21.1	total width	b1	mm	503
	4.32	Ground clearance centre of wheelbase	m2	mm	35
	4.35	Turning radius	Wa	mm	560
Performance data	5.1	Travel speed laden/unladen		km/h	4.5 / 4.9
	5.5	Drawbar pull laden		N	200
	5.6	Max. drawbar pull laden/unladen		N / -	550 / -
Perfor	5.10	Service brake			electromagnetic
Electric motor/electronics	6.1	Drive motor, performance S2 60 min		kW	0.4
	6.4	Battery voltage/nominal capacity		V / Ah	24 / 36
	6.5	Battery weight		kg	7.5
	6.6.1	Energy consumption according to EN cycle		kWh/h	0.18
ctric mot	6.6.2	CO2 equivalent as per EN 16796		kg/h	0.1

ther	8.1	Type of drive control		Impulse/DC
	10.7	Sound pressure level according to EN12053	dB (A)	70

<sup>-</sup> This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in Norderstedt, Moosburg and Landsberg are certified as well as our Genuine Parts Center in Kaltenkirchen.

