



Hand pallet truck


AM V05

Lift height: 390 mm / Load capacity: 500 kg

JUNGHEINRICH

Technical drawing of a mechanical system, likely a crane or lifting device, showing dimensions and forces. The diagram includes a vertical mast, a horizontal beam, and a counterweight. Key dimensions and forces are labeled:

- h_{14} : Total height of the mast.
- c : Horizontal distance from the mast to the center of gravity of the counterweight.
- Q : Weight of the counterweight.
- h_3 : Height of the counterweight above the beam.
- h_{13} : Height of the beam above the ground.
- m_2 : Mass of the beam.
- S : Support point of the beam.
- l_2 : Distance from the mast to the support point.
- l : Distance from the support point to the end of the beam.
- l_1 : Total length of the beam.
- y : Distance from the mast to the center of gravity of the beam.

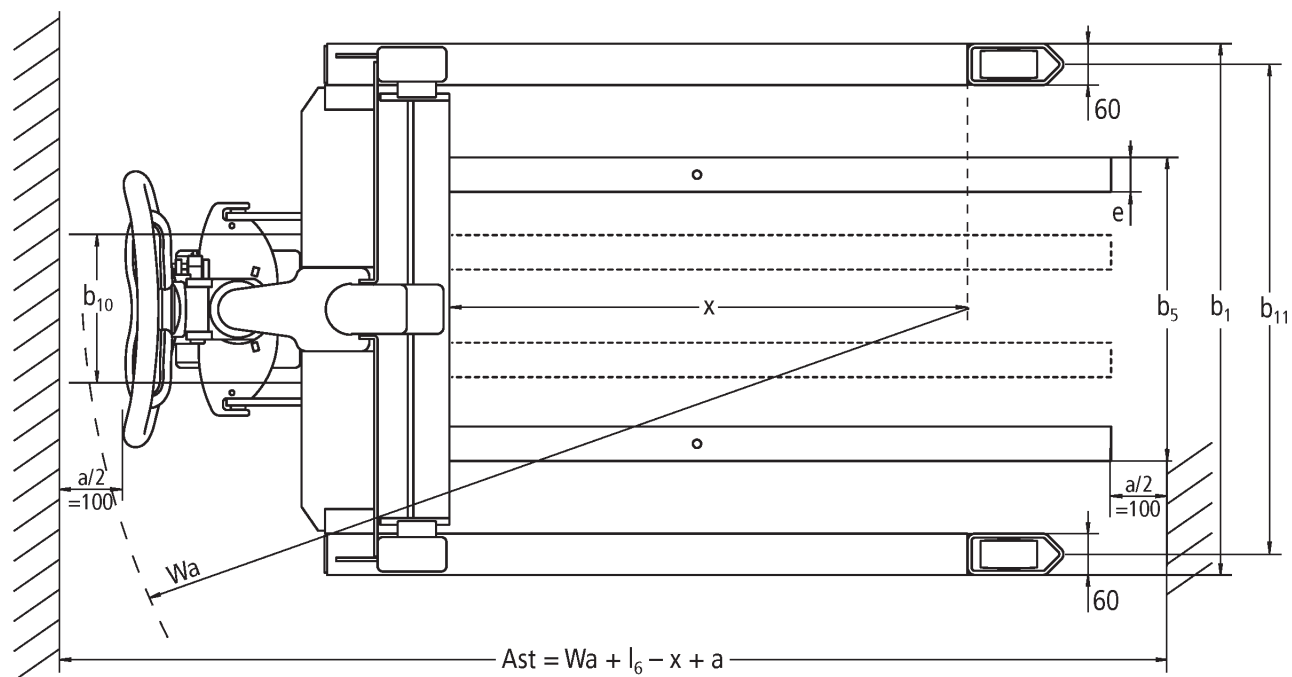

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		other (OEM)
	1.2	Manufacturer's type designation		AM V05
	1.3	Drive type		Manual
	1.4	Operation		Manual
	1.5	Load capacity/load	Q kg	500
	1.6	Load centre distance	c mm	400
	1.9	Wheelbase	y mm	1120
Weights	2.1	Netto weight	kg	155
	2.2	Axle load laden front/rear	kg	320 / 325
	2.3	Axle load unladen front/rear	kg	101 / 54
Wheels/chassis	3.1	Tyres		C-GN
	3.2	Tyre size, front		Ø 180 x 50
	3.3	Tyre size, rear		Ø 82 x 40
	3.5	Wheels, number front/back (x=driven)		2/2
	3.6	Tread width, front	b10 mm	122
	3.7	Tread width, rear	b11 mm	700
Basic dimensions	4.4	Lift (h3)	h3 mm	390
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1210
	4.15	Height, lowered	h13 mm	85
	4.19	Total length	l1 mm	1405
	4.20	Length including fork shank	l2 mm	450
	4.21.1	total width	b1 mm	760
	4.22	Fork dimensions	s/e/l mm	50 x 50 x 955
	4.25	Width across forks	b5 mm	140
	4.26	Width between support arms/loading areas	b4 mm	640
	4.32	Ground clearance centre of wheelbase	m2 mm	30
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	1805
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	2005
	4.35	Turning radius	Wa mm	1425
Performance data	5.3	Lowering speed laden/unladen	m/s	0.09 / 0.05

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**