



Schaarhefwagen


AMX 10 / 10e

Hefhoogte: 714 mm / Draagvermogen: 1000 kg

JUNGHEINRICH

The diagram illustrates a mechanical system with the following parameters and dimensions:

- Dimensions:**
 - 1897 : Total vertical height from the base to the top of the vertical assembly.
 - h_{14} : Vertical height from the base to the horizontal reference line.
 - h_3 : Vertical height from the horizontal reference line to the top of the vertical assembly.
 - h_{13} : Vertical height from the base to the horizontal reference line.
 - l_2 : Horizontal distance from the base to the vertical assembly.
 - l : Horizontal distance from the vertical assembly to the right end of the horizontal beam.
 - l_1 : Total horizontal distance from the base to the right end of the horizontal beam.
 - y : Horizontal distance from the vertical assembly to the center of mass m_2 .
 - c : Horizontal distance from the vertical assembly to the point of application of force Q .
- Parameters and Forces:**
 - Q : A downward force applied at a distance c from the vertical assembly.
 - 600 Maxi : A vertical dimension indicating a maximum value.
 - m_2 : The mass of the horizontal beam.
- Configuration:**
 - The system consists of a vertical assembly on the left and a horizontal beam on the right.
 - Dashed lines indicate the initial or reference configuration of the system.
 - The horizontal beam is supported by a roller at its left end and a pin support at its right end.

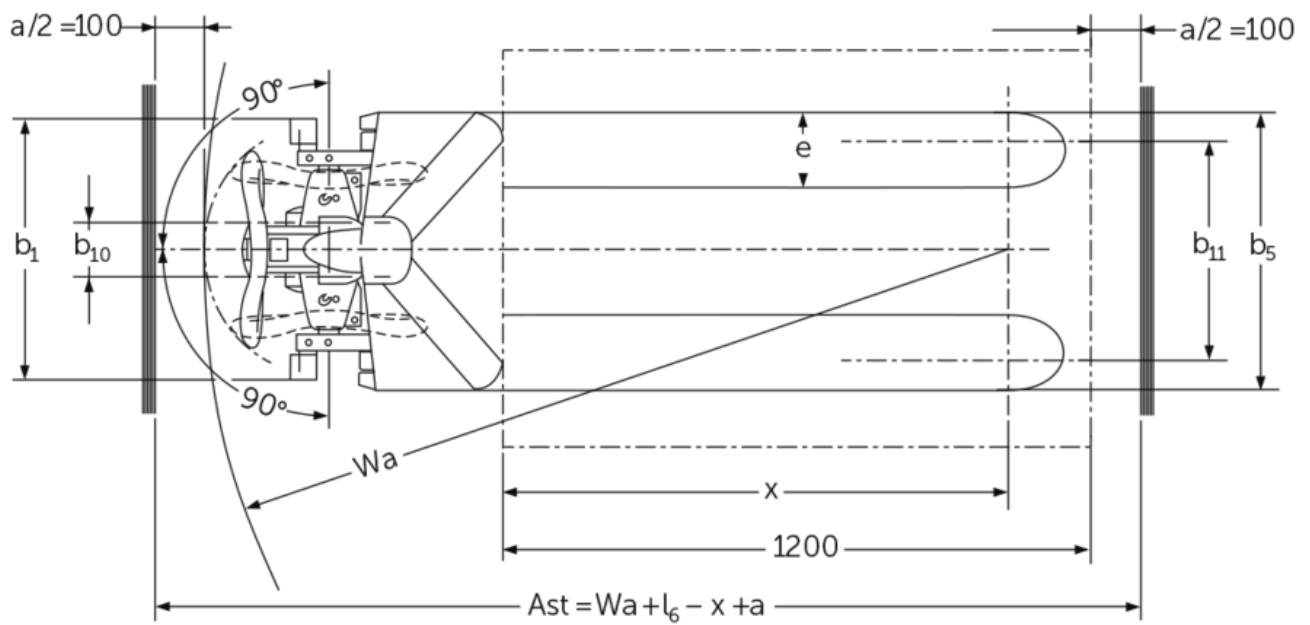

VDI-tabel

Kenmerken	1.2	Typeaanduiding fabrikant			AMX 10e					AMX 10		
	1.3	Aandrijving			Elektrisch	Handmatig						
	1.4	Bediening			Hand							
	1.5	Draagvermogen/last	Q	kg	1000							
	1.6	Lastzwaartepuntafstand	c	mm	600							
	1.9	Wielbasis	y	mm	1383	-			1383	-		
Gewichten	2.1	Eigen gewicht	kg		195					157		
	2.2	Aslast met last voor/achter	kg		443 / 752	- / -			406 / 751	- / -		
	2.3	Aslast onbelast voor/achter	kg		136 / 59	- / -			101 / 56	- / -		
Wielen/chassis	3.1	Banden			C-GN	N-GN	V-GV	N-GN	C-GN	V-GV	C-GN	N-GN
	3.2	Bandenmaat, voor			Ø 170 x 50	-				Ø 170 x 50	-	
	3.3	Bandenmaat, achter			Ø 82 x 62	-				Ø 82 x 62	-	
	3.5	Wielen, aantal voor/achter (x=aangedreven)			2/2	-				2/2	-	
	3.6	Spoorbreedte, voor	b10	mm	109	-				109	-	
	3.7	Spoorbreedte, achter	b11	mm	440	-				440	-	
Afmetingen	4.4	Heffing (h3)	h3	mm	714							
	4.5	Hoogte hefmast uitgeschoven (h4)	h4	mm	1897	-			1897	-		
	4.9	Hoogte disselgreep tijdens rijden min./max.	h14	mm	1299	-			1299	-		
	4.15	Gedaalde hoogte	h13	mm	86							
	4.19	Totale lengte	l1	mm	1650							
	4.20	Lengte inclusief vorkrug	l2	mm	500	-			500	-		
	4.21.1	Totale breedte	b1	mm	560		680		560			
	4.22	Vorkafmetingen	s/ e/l	mm	53 x 150 x 1150	150 x 1150			53 x 150 x 1150	150 x 1150		
	4.25	Maat over de vorken	b5	mm	560		680		560			
	4.32	Bodemvrijheid midden wielbasis	m2	mm	30	-			30	-		
	4.34.2	Werkbreedte (pallet 800x1200 longitudinaal)	Ast	mm	2005	-			2005	-		
	4.35	Draaicirkel	Wa	mm	-					1635	-	
Prestaties	5.3	Daalsnelheid met/zonder belasting	m/s		0,13 / 0,05	- / -			0,11 / 0,04	- / -		

E-motor/elektronica	6.2	Hefmotor, vermogen op S3 (ED) 15%	kW	0,5	-
	6.4	Accuspanning/nominaal vermogen	V / Ah	12 / 70	-
	6.5	Accugewicht	kg	24	-

- Dit typeblad conform VDI-richtlijn 2198 vermeldt alleen de technische waarden van het standaardapparaat. Afwijkende banden, andere hefmasten, extra inrichtingen etc. kunnen resulteren in andere waarden.

Kenmerken	1.2	Typeaanduiding fabrikant		AMX 10				
	1.3	Aandrijving		Handmatig				
	1.4	Bediening		Hand				
	1.5	Draagvermogen/last	Q	kg	1000			
	1.6	Lastzwaartepuntafstand	c	mm	600			
Gewichten	2.1	Eigen gewicht		kg	157			
Wielen/chassis	3.1	Banden			V-GV	N-GN	C-GN	V-GV
Afmetingen	4.4	Heffing (h3)	h3	mm	714			
	4.15	Gedaalde hoogte	h13	mm	86			
	4.19	Totale lengte	l1	mm	1650			
	4.21.1	Totale breedte	b1	mm	560	680		
	4.22	Vorkafmetingen	s/e/l	mm	150 x 1150			
	4.25	Maat over de vorken	b5	mm	560	680		
- Dit typeblad conform VDI-richtlijn 2198 vermeldt alleen de technische waarden van het standaardapparaat. Afwijkende banden, andere hefmasten, extra inrichtingen etc. kunnen resulteren in andere waarden.								

Jungheinrich SA

Researchpark Haasrode 1105
Esperantolaan 1
3001 Leuven (Heverlee)
Tél. 016 398711
info@jungheinrich.be
www.jungheinrich.be

De Duitse productie-eenheden in
Norderstedt, Moosburg en Landsberg en
het onderdelencentrum in Kaltenkirchen
zijn gecertificeerd.

ISO 9001
ISO 14001

Jungheinrich intern transport materieel
voldoet aan de Europese
veiligheidsvoorschriften.



 **JUNGHEINRICH**