





Electric tow tractor **EZS 130**

Towing capacity: 3000 kg



EZS 130

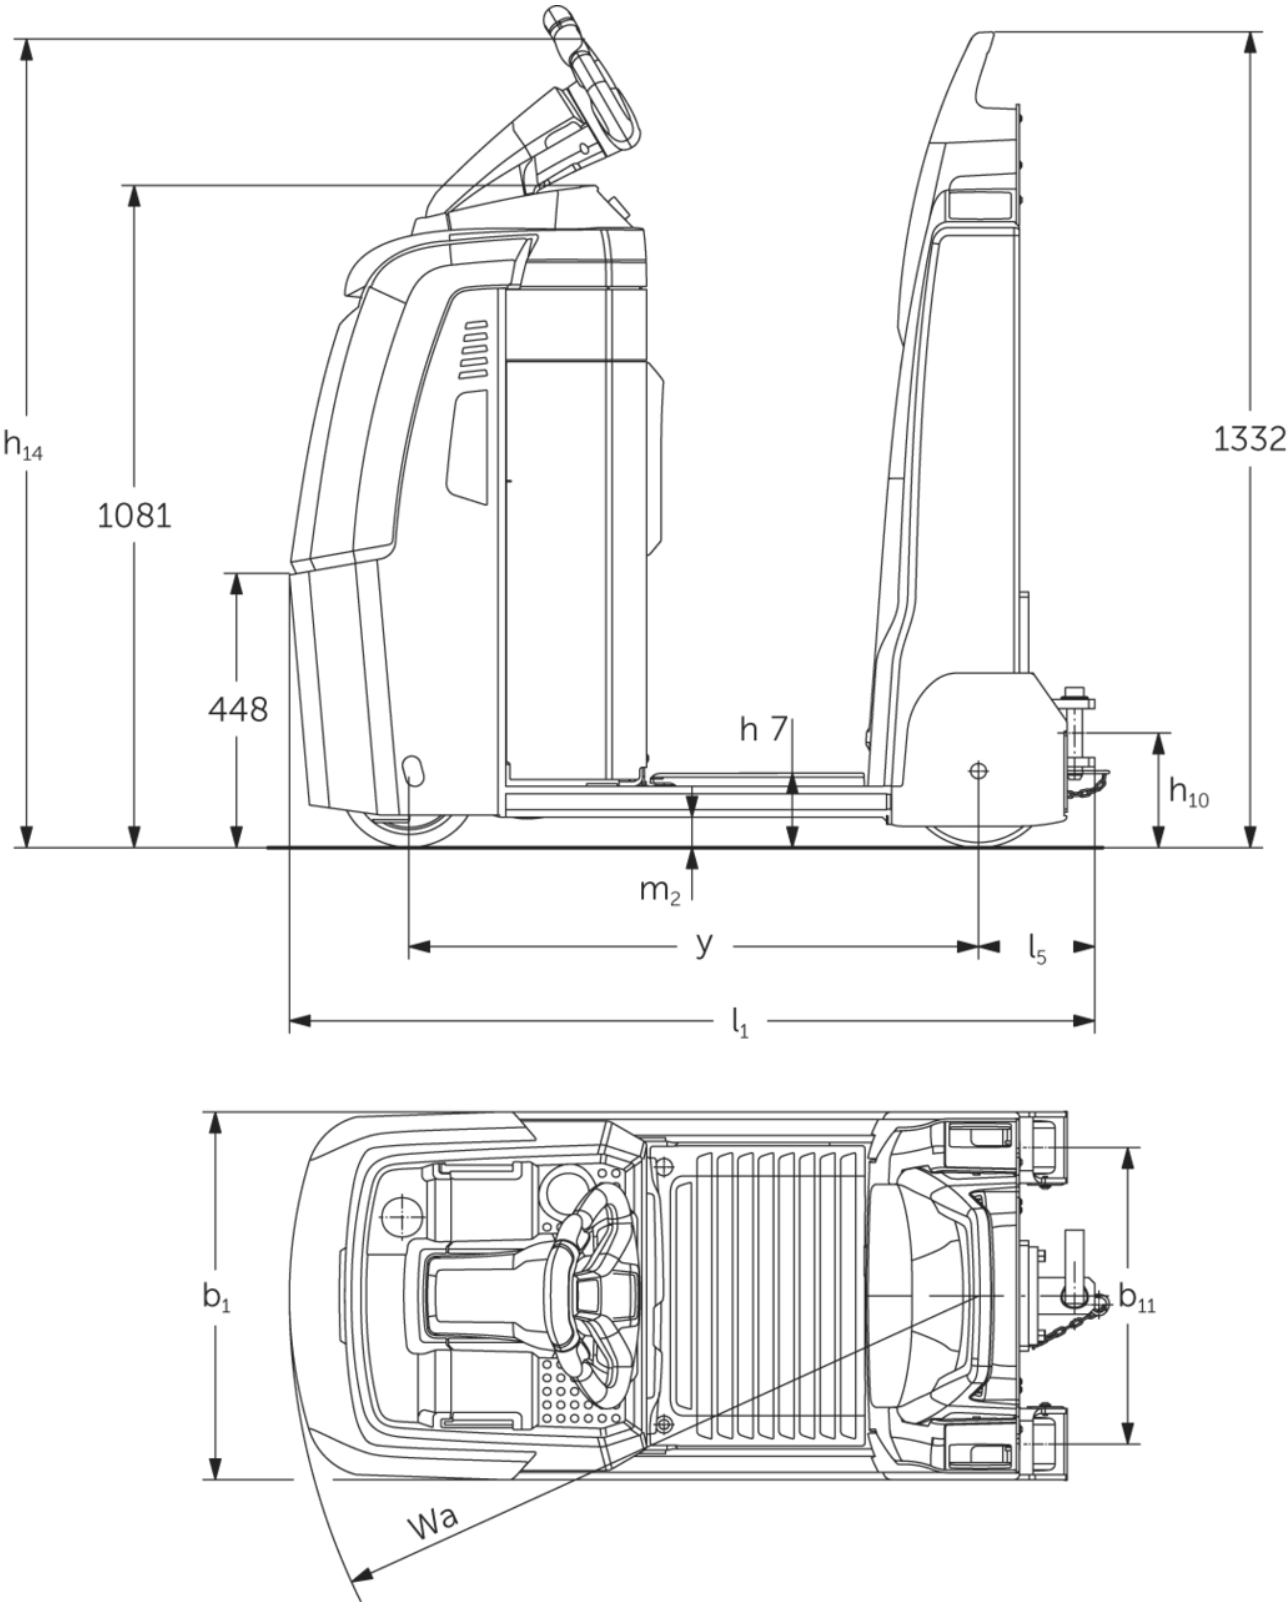

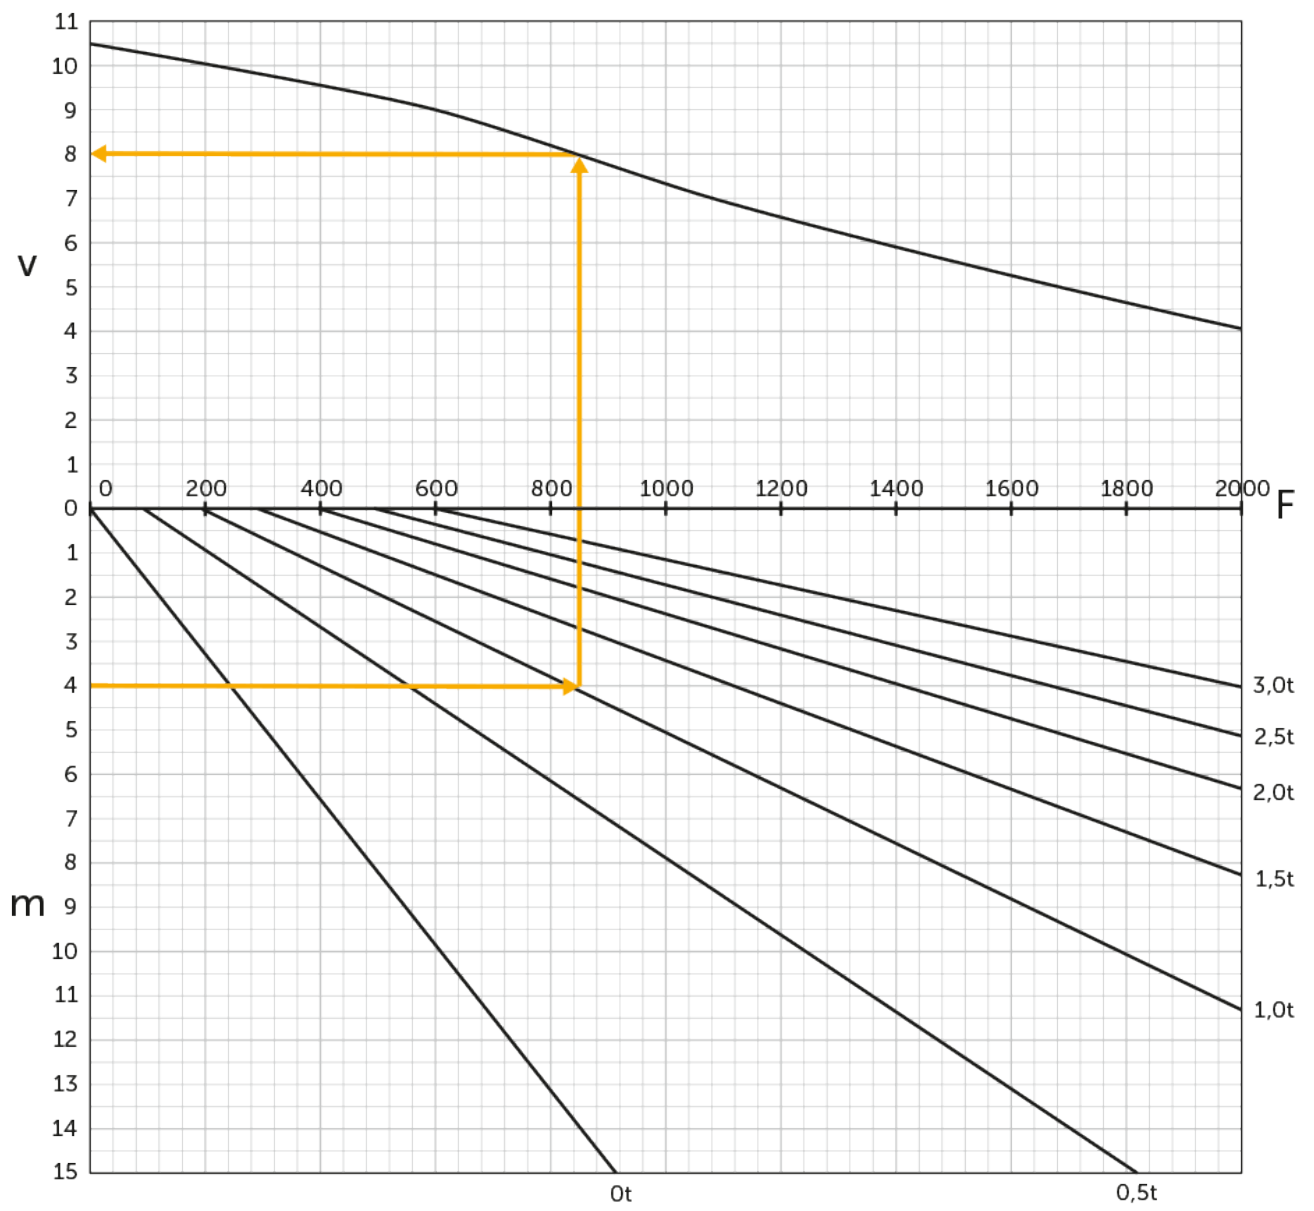

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich	
	1.2	Manufacturer's type designation		EZS 1	
	1.3	Drive		Electric	
	1.4	Operation		Stand-on	
	1.5.3	Towing capacity	Q	kg	
	1.7	Rated drawbar pull		N	
	1.9	Wheelbase	y	mm	
Weights	2.1.1	Service weight (incl. battery)		kg	525
	2.3	Axle load unladen front/rear		kg	320 / 205
Wheels/suspension system	3.1	Tyres			Polyurethane / Super-elastic
	3.2	Tyre size, front			ø230 x 78
	3.3	Tyre size, rear			ø250 x 80
	3.5	Wheels, number front/back (x=driven)			1 x / 2
	3.7	Tread width, rear	b11	mm	485
Basic dimensions	4.8	Seat height/stand height	h7	mm	122
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1320
	4.12	Coupling height	h10	mm	158
	4.19	total length	l1	mm	1315
	4.21.1	total width	b1	mm	600
	4.32	Ground clearance centre of wheelbase	m2	mm	50
	4.35	Turning radius	Wa	mm	1126
Performance data	5.1	Travel speed laden/unladen		km/h	9 / 10.5
	5.1.1	Reverse travel speed with/without load		km/h	6 / 6
	5.5	Drawbar pull laden/unladen		N	600 / 600
	5.6	Max. drawbar pull laden/unladen		N	2000 / 2000
	5.10	Service brake			electromagnetic/ generative
E-motor/Electronics	6.1	Drive motor, performance S2 60 min		kW	2.8
	Batterie	6.4	Battery voltage/nominal capacity	V / Ah	24 / 200
		6.5	Battery weight	kg	185

E-motor/Electronics	6.6.1	Energy consumption according to EN cycle	kWh/h		0.75
	6.6.2	CO2 equivalent as per EN 16796	kg/h		0.4
Other	8.1	Type of drive control			AC speedCONTROL
	10.5	Steering version			electric
	10.7	Sound pressure level according to EN12053		dB (A)	57

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

- VDI no. 4.9: the height applies to the version with jetPILOT
- VDI no. 4.12: the value for the coupling height applies to a single plug-in coupling
- VDI no. 4.19: The specification for the overall length contains a single plug-in coupling

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

 **JUNGHEINRICH**