






Electric tow tractor **EZS C40**

Towing capacity: 4000 kg

EZS C40

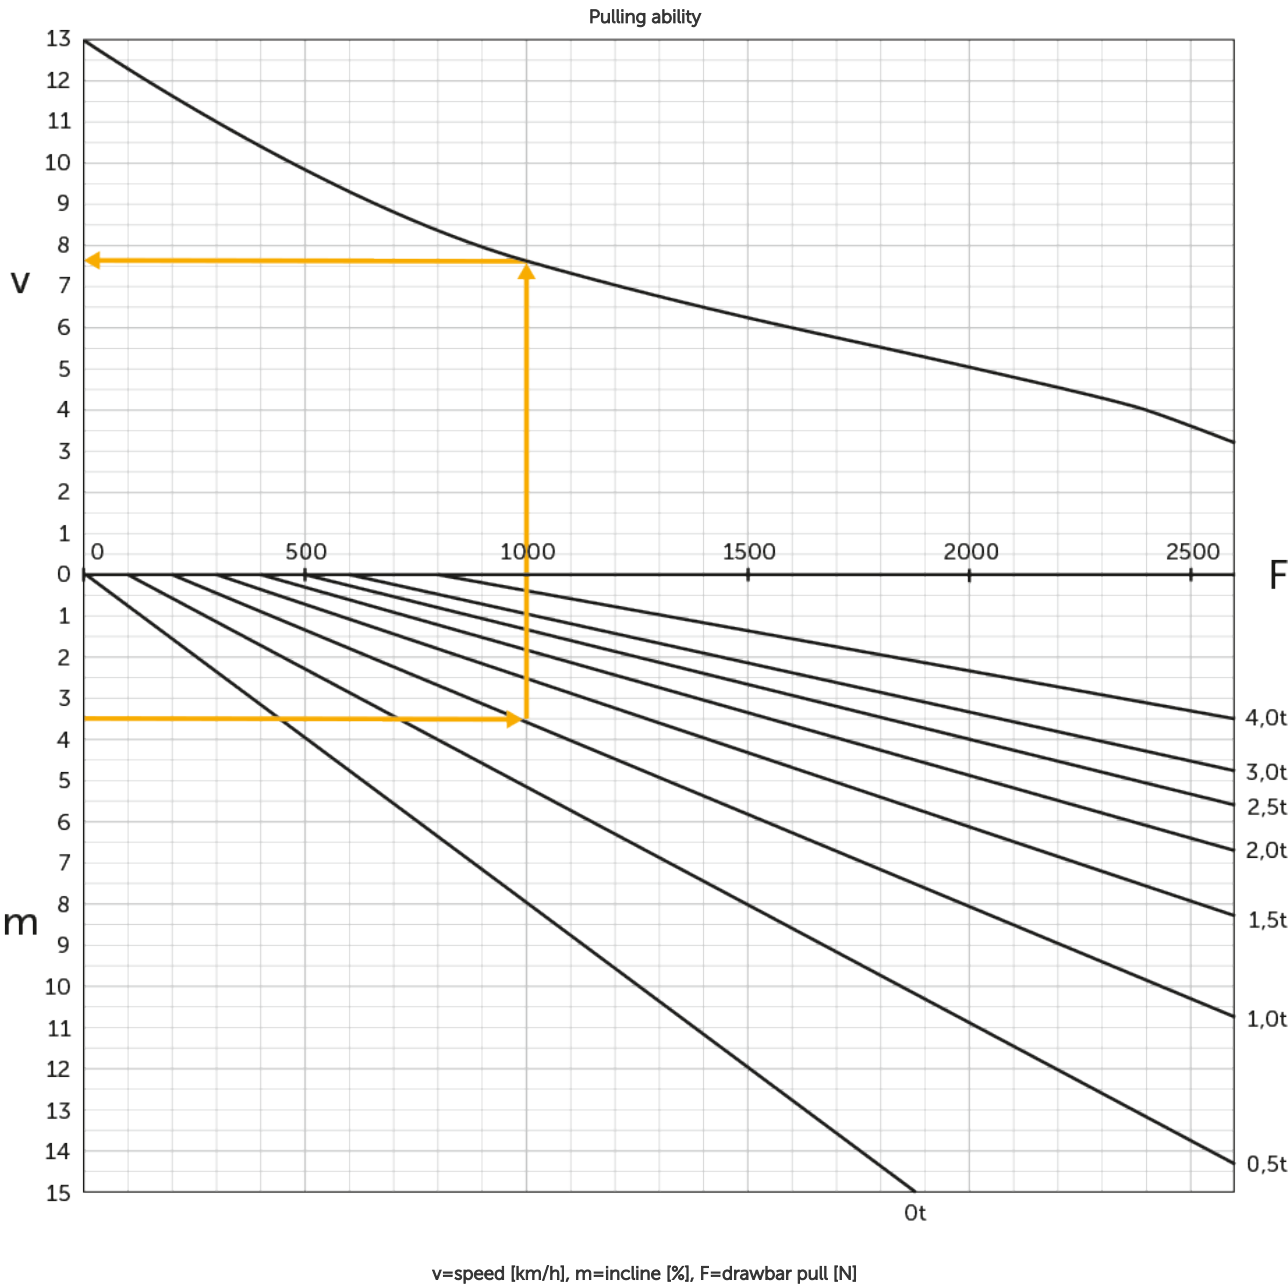

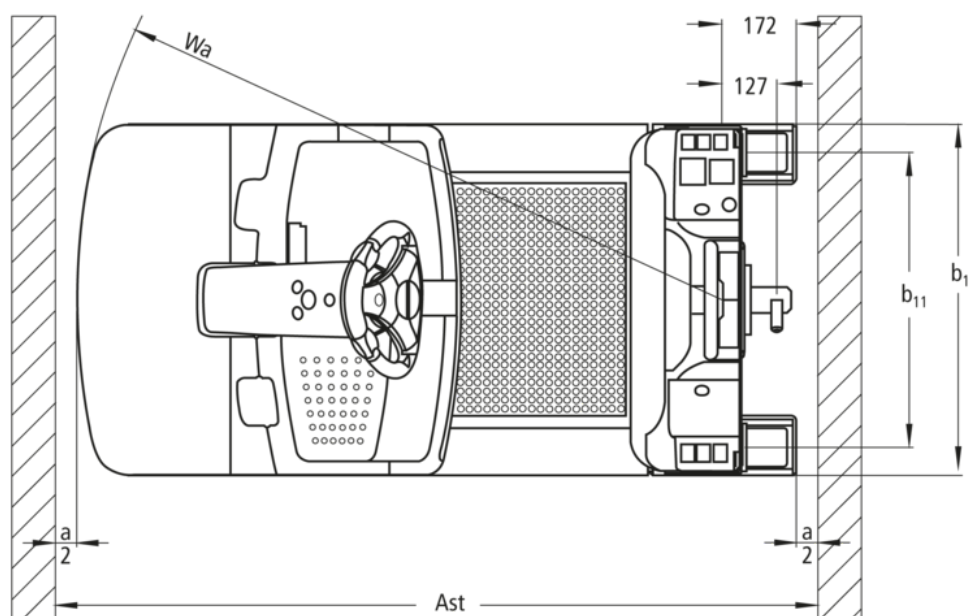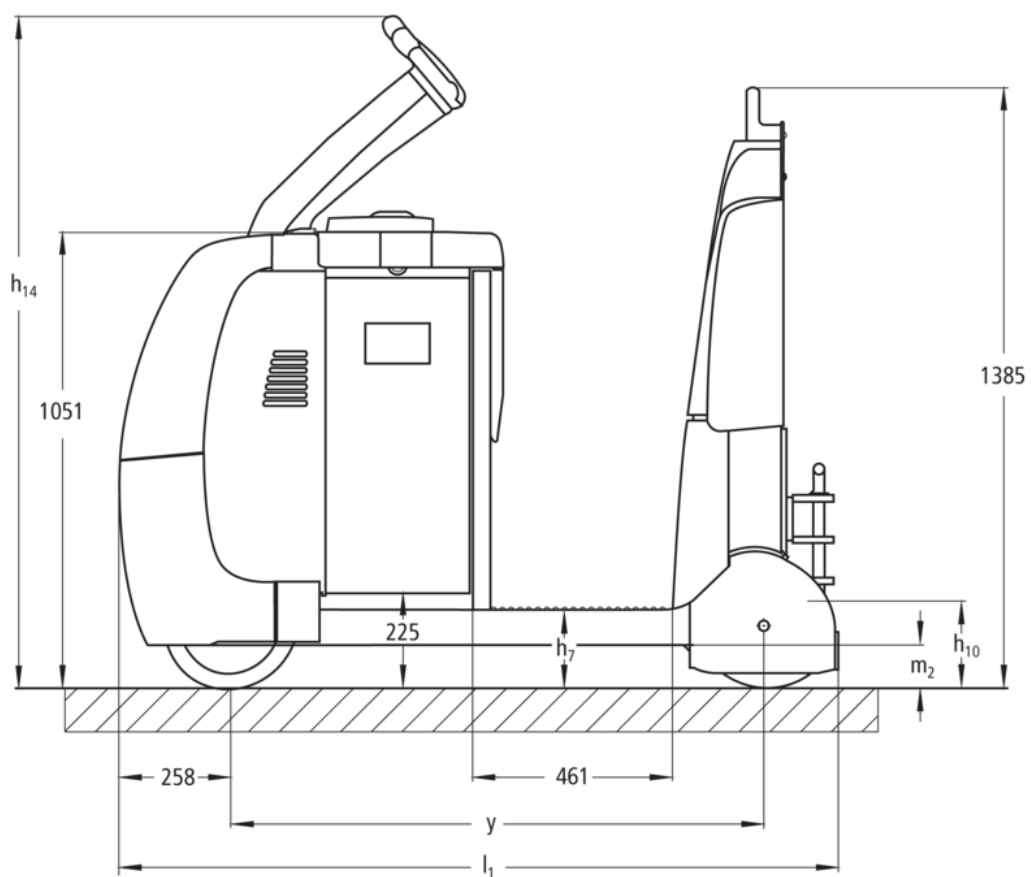

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			EZS C40
	1.3	Drive type			electric
	1.4	Operation			Stand-on
	1.5.3	Towing capacity	Q	kg	4000
	1.7	Rated drawbar pull			N800
	1.9	Wheelbase	y	mm	1229
Weights	2.1.1	Service weight (incl. battery)			kg1185
	2.3	Axle load unladen front/rear			kg660 / 525
Wheels/chassis	3.1	Tyres			Super-elastic (SE)
	3.2	Tyre size, front			Ø 310 x 105
	3.3	Tyre size, rear			Ø 301 x 85
	3.5	Wheels, number front/back (x=driven)			1x / 2
	3.7	Tread width, rear	b11	mm	680
Basic dimensions	4.8	Seat height/stand height	h7	mm	182
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1410
	4.12	Coupling height	h10	mm	158
	4.19	Total length	l1	mm	1659
	4.21.1	total width	b1	mm	810
	4.32	Ground clearance centre of wheelbase	m2	mm	100
	4.35	Turning radius	Wa	mm	1487
Performance data	5.1	Travel speed laden/unladen			km/h8 / 12.5
	5.1.1	Reverse travel speed with/without load			km/h6 / 6
	5.5	Drawbar pull laden/unladen			N800 / 800
	5.6	Max. drawbar pull laden/unladen			N2600 / 2600
	5.10	Service brake			generative
Electric motor/electronics	6.1	Drive motor, performance S2 60 min			kW2.8
	6.4	Battery voltage/nominal capacity			V / Ah24 / 620
	6.5	Battery weight			kg470
	6.6.1	Energy consumption according to EN cycle			kWh/h1.13
	6.6.2	CO2 equivalent as per EN 16796			kg/h0.6

Other	8.1	Type of drive control		AC speedCONTROL
	10.5	Steering version		Electric steering
	10.7	Sound pressure level according to EN12053	dB (A)	66
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

- VDI no. 4.9: the height applies to the jetPILOT
- VDI no. 4.12: the value for the coupling height applies to a single plug-in coupling. Other coupling heights are available
- VDI no. 4.19: as different coupling systems are available, the specification applies to the overall length including a single plug-in coupling
- VDI no. 5.1: see tow load diagram
- VDI no. 5.5: this value is the rated drawbar pull
- VDI no. 5.6: see tow load diagram

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**