




Manuell pallyftare/handtruck med våg **AMW 22 / 22p**

Lyfthöjd: 122 mm / Lastkapacitet: 2200 kg

 JUNGHEINRICH

Technical drawing of a pallet truck (Fig. 1.10). The drawing shows the side profile of the truck with various dimensions and labels:

- h_{14} : Total height of the truck.
- (y) : Horizontal distance from the front wheel axle to the center of gravity.
- c : Horizontal distance from the front wheel axle to the point of application of the load Q .
- Q : Downward force representing the load.
- 674 : Vertical distance from the front wheel axle to the point of application of the load Q .
- m : Vertical distance from the front wheel axle to the horizontal reference line.
- s : Vertical distance from the horizontal reference line to the point of application of the load Q .
- h_{13} : Height of the front wheel axle above the ground.
- h_3 : Height of the rear wheel axle above the ground.
- l_2 : Horizontal distance from the front wheel axle to the rear wheel axle.
- l : Horizontal distance from the front wheel axle to the center of gravity.
- l_1 : Total horizontal length of the truck.

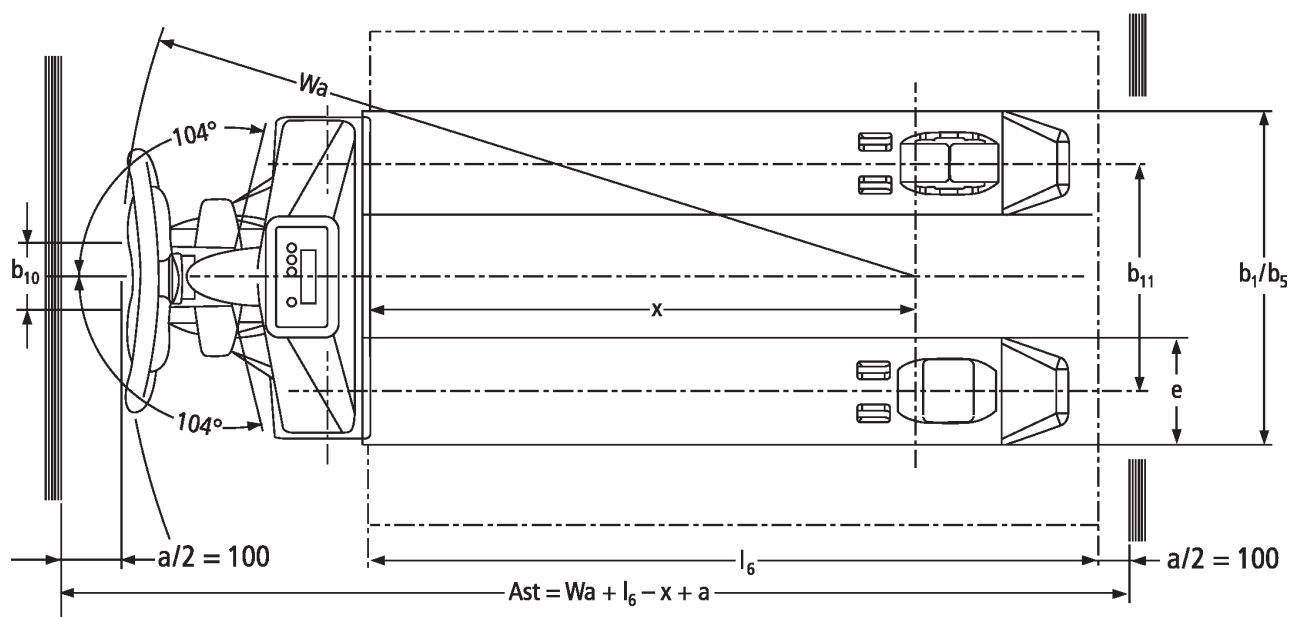

Jungheinrich Svenska AB

Huvudkontor:
Starrvägen 16
232 61 ARLÖV
Telefon 040 - 690 46 00
Telefax 040 - 690 46 99
kundkontakt@jungheinrich.se
www.jungheinrich.se

I Tyskland är truckfabrikerna i
Norderstedt, Moosburg och Landsberg
samt vårt reservdelscenter i
Kaltenkirchen certifierade.

ISO 9001
ISO 14001

Jungheinrichs truckar uppfyller de
europeiska säkerhetskraven.



 **JUNGHEINRICH**