



Handgabelhubwagen mit Waage


AMW 22 / 22p

Hubhöhe: 122 mm / Tragfähigkeit: 2200 kg

JUNGHEINRICH

Technical drawing of a pallet truck (Fig. 1.10). The drawing shows the side profile of the truck with various dimensions and labels:

- h_{14} : Total height of the truck.
- (y) : Horizontal distance from the front wheel axle to the center of gravity.
- c : Horizontal distance from the front wheel axle to the point of application of the load Q .
- Q : Downward force representing the load.
- 674 : Vertical distance from the front wheel axle to the center of gravity.
- m : Vertical distance from the front wheel axle to the bottom of the frame.
- s : Vertical distance from the bottom of the frame to the top of the frame.
- h_{13} : Height of the frame above the front wheel axle.
- h_3 : Height of the frame above the front wheel axle.
- l_2 : Horizontal distance from the front wheel axle to the rear wheel axle.
- l : Horizontal distance from the front wheel axle to the rear wheel axle.
- l_1 : Horizontal distance from the front wheel axle to the rear wheel axle.

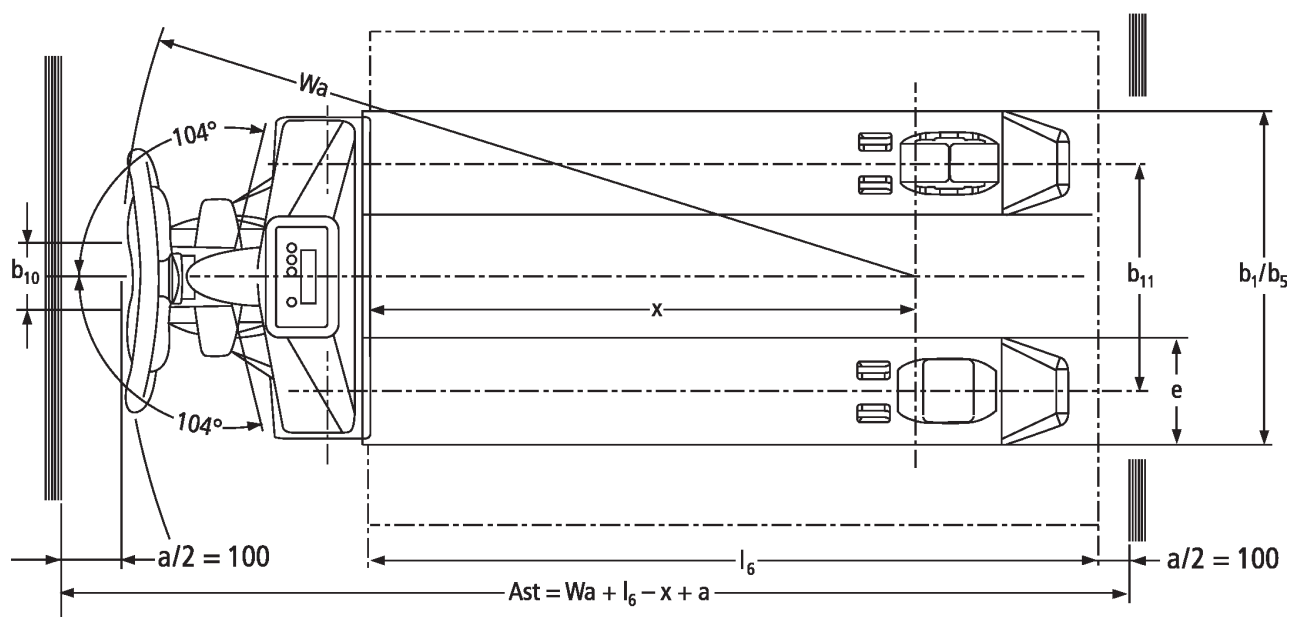

Jungheinrich

Vertrieb Deutschland AG & Co. KG
Friedrich-Ebert-Damm 129
22047 Hamburg
Telefon 0800 222 585858*
*Deutschlandweit kostenlos
info@jungheinrich.de

Zertifiziert sind die deutschen
Produktionswerke in Norderstedt,
Moosburg und Landsberg sowie unser
Ersatzteilzentrum in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich Flurförderzeuge
entsprechen den europäischen
Sicherheitsanforderungen.

The Jungheinrich logo, featuring a red upward-pointing arrow above the word 'JUNGHEINRICH' in a bold, black, sans-serif font.