





Scissor lift hand pallet truck

AMX 10 / 10e



Lift height: 714 mm / Load capacity: 1000 kg

JUNGHEINRICH

AMX 10 / 10e

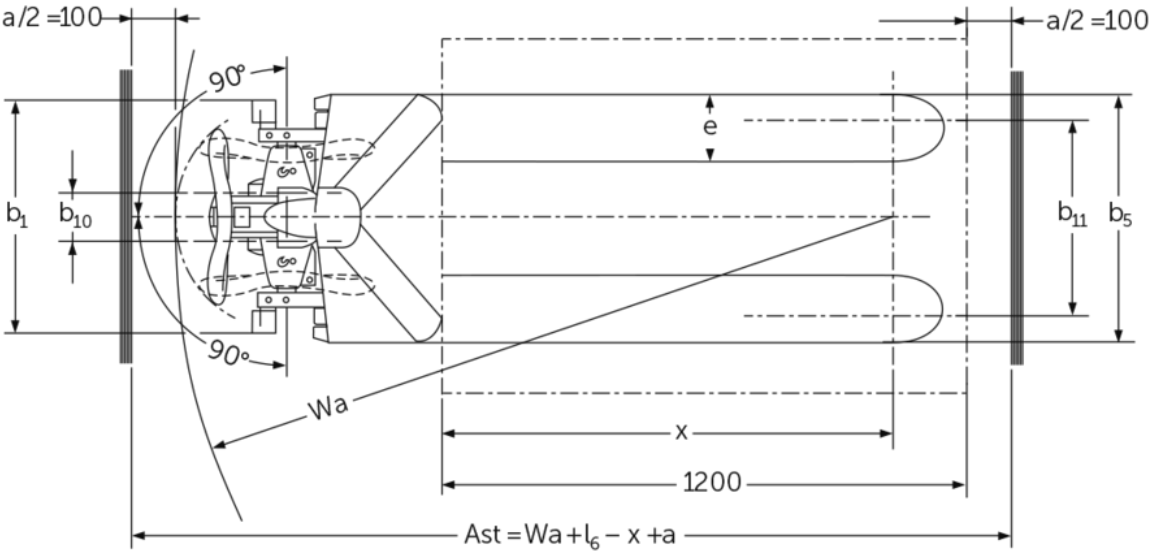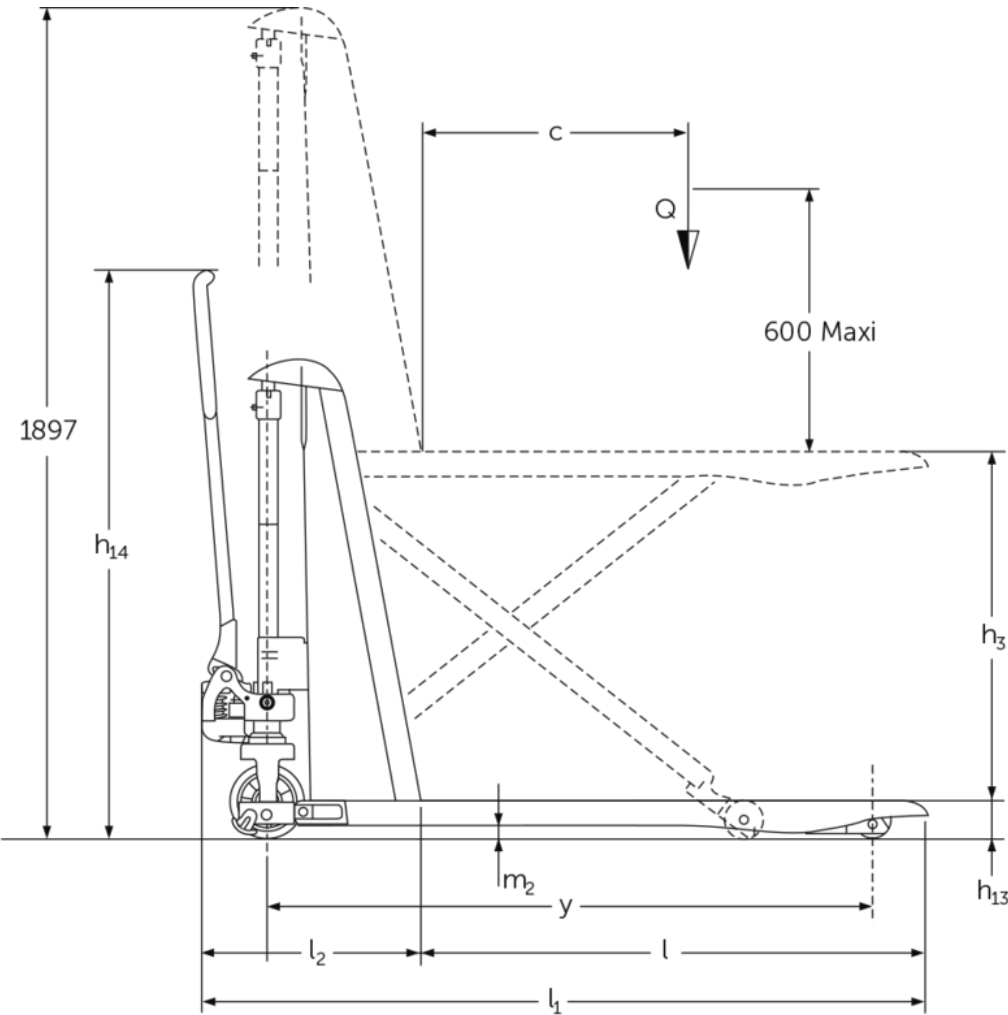

AMX 115 / 115p

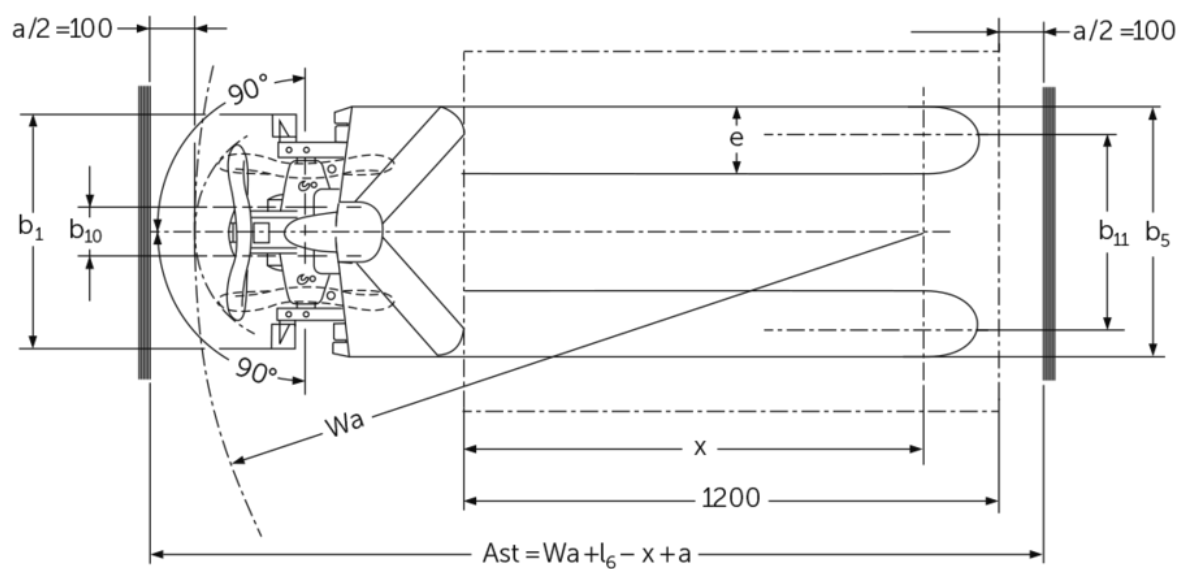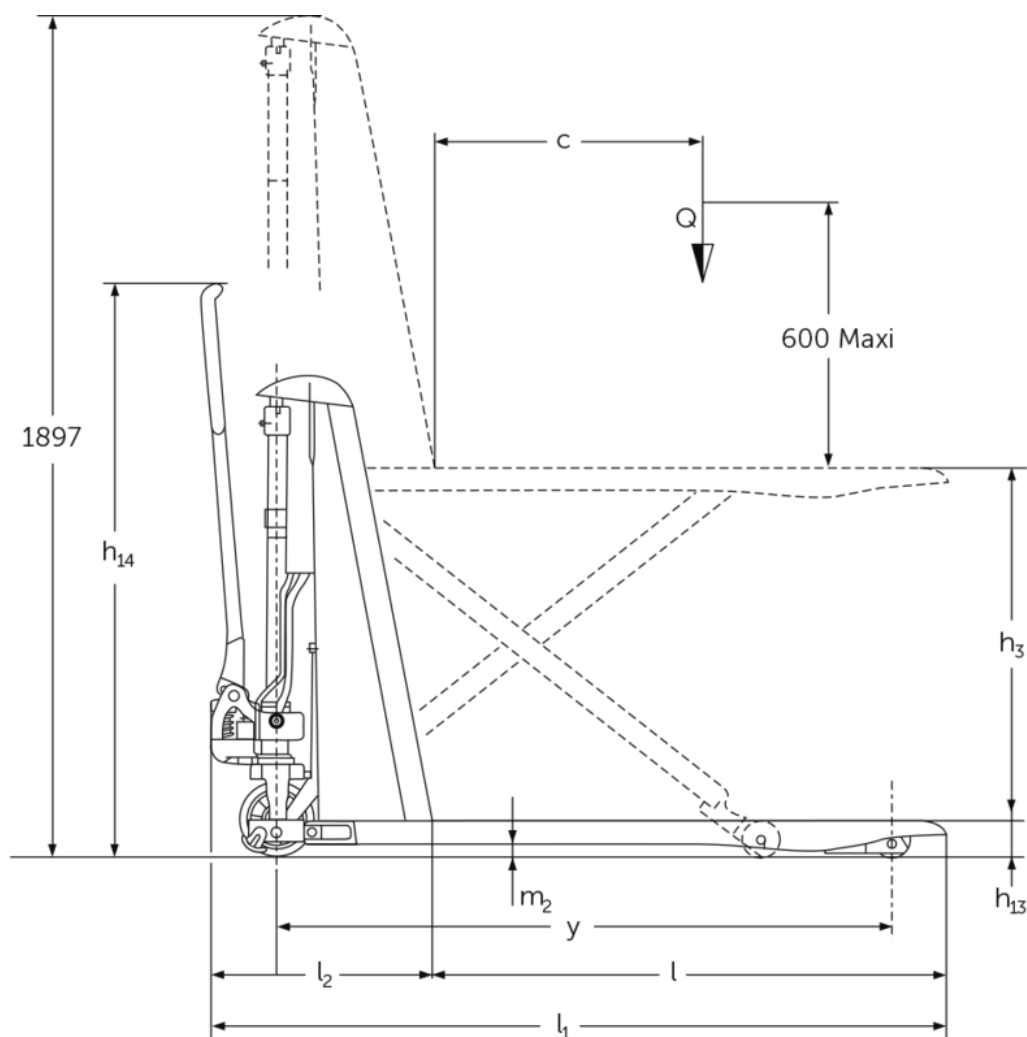

AMX I15e / I15ep

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Other (OEM)									
	1.2	Manufacturer's type designation		AMX 10e					AMX 10				
	1.3	Drive type		electric	Manual								
	1.4	Operation		Manual									
	1.5	Load capacity/load	Q	kg	1000								
	1.6	Load centre distance	c	mm	600								
	1.9	Wheelbase	y	mm	1383	-			1383			-	
Weights	2.1	Netto weight		kg	195					157			
	2.2	Axle load laden front/rear		kg	443 / 752	- / -			406 / 751			- / -	
	2.3	Axle load unladen front/rear		kg	136 / 59	- / -			101 / 56			- / -	
Wheels/chassis	3.1	Tyres			C-GN	N-GN	V-GV	N-GN	C-GN	V-GV	C-GN	N-GN	
	3.2	Tyre size, front			Ø 170 x 50	-			Ø 170 x 50			-	
	3.3	Tyre size, rear			Ø 82 x 62	-			Ø 82 x 62			-	
	3.5	Wheels, number front/back (x=driven)			2/2	-			2/2			-	
	3.6	Tread width, front	b10	mm	109	-			109			-	
	3.7	Tread width, rear	b11	mm	440	-			440			-	
Basic dimensions	4.4	Lift (h3)	h3	mm	714								
	4.5	Extended mast height (h4)	h4	mm	1897	-			1897			-	
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1299	-			1299			-	
	4.15	Height, lowered	h13	mm	86								
	4.19	Total length	l1	mm	1650								
	4.20	Length including fork shank	l2	mm	500	-			500			-	
	4.21.1	total width	b1	mm	560			680			560		
	4.22	Fork dimensions	s/ e/l	mm	53 x 150 x 1150		150 x 1150			53 x 150 x 1150		150 x 1150	
	4.25	Width across forks	b5	mm	560			680			560		
	4.32	Ground clearance centre of wheelbase	m2	mm	30	-			30			-	
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	2005	-			2005			-	
4.35	Turning radius	Wa	mm	-								1635	-
Performance data	5.3	Lowering speed laden/unladen		m/s	0.13 / 0.05	- / -			0.11 / 0.04			- / -	

Electric motor/electronics	6.2	Lift motor, performance with S3	kW	0.5		-
	6.4	Battery voltage/nominal capacity	V / Ah	12 / 70		-
	6.5	Battery weight	kg	24	-	

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)			
	1.2	Manufacturer's type designation			AMX 10			
	1.3	Drive type			Manual			
	1.4	Operation			Manual			
	1.5	Load capacity/load	Q	kg	1000			
	1.6	Load centre distance	c	mm	600			
Weights	2.1	Netto weight		kg	157			
Wheels/chassis	3.1	Tyres			V-GV	N-GN	C-GN	V-GV
Basic dimensions	4.4	Lift (h3)	h3	mm	714			
	4.15	Height, lowered	h13	mm	86			
	4.19	Total length	l1	mm	1650			
	4.21.1	total width	b1	mm	560	680		
	4.22	Fork dimensions	s/e/l	mm	150 x 1150			
	4.25	Width across forks	b5	mm	560	680		

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in
Norderstedt, Moosburg and Landsberg are
certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European
safety requirements.



 **JUNGHEINRICH**