



## Electric tow tractor


### **EZS C40**



Towing capacity: 4000 kg

**LION**  
technology

**JUNGHEINRICH**

## EZS C40

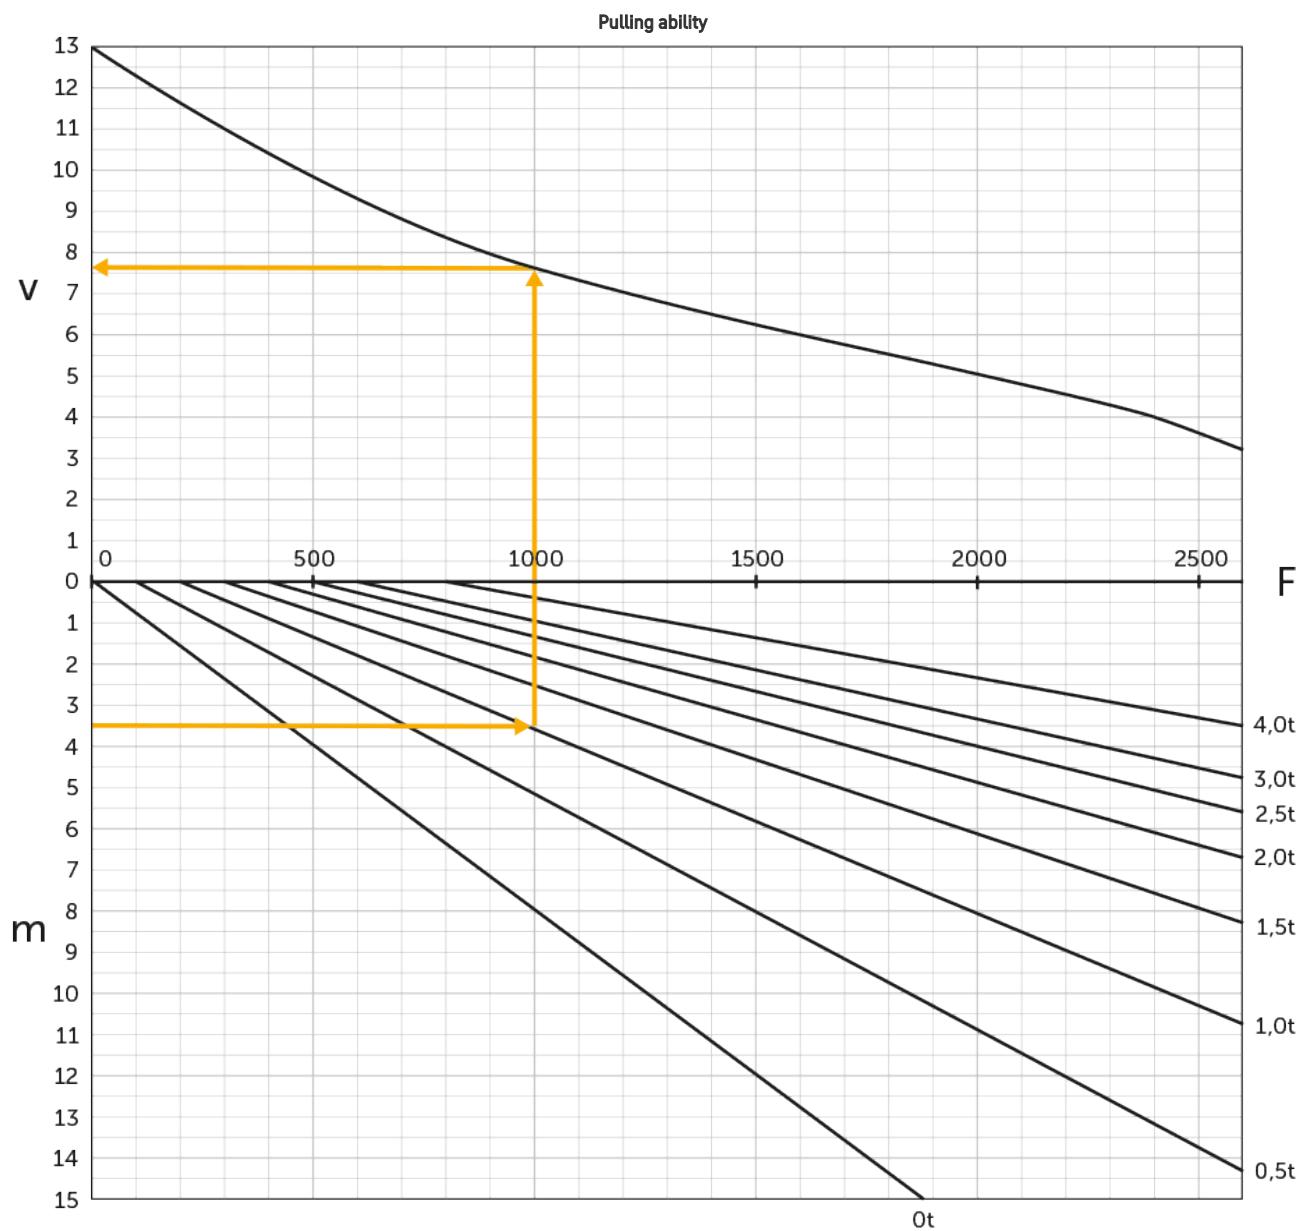

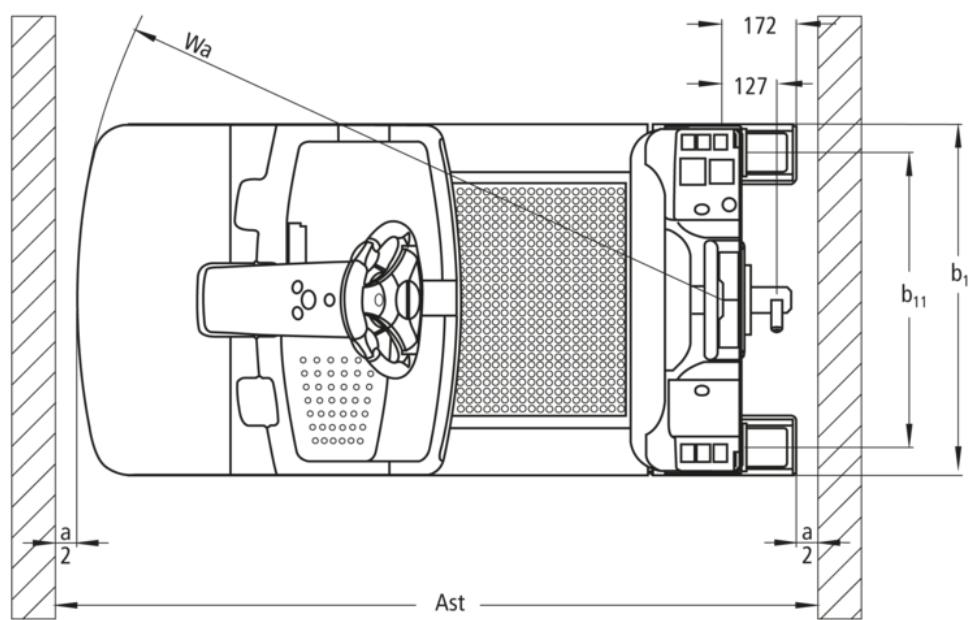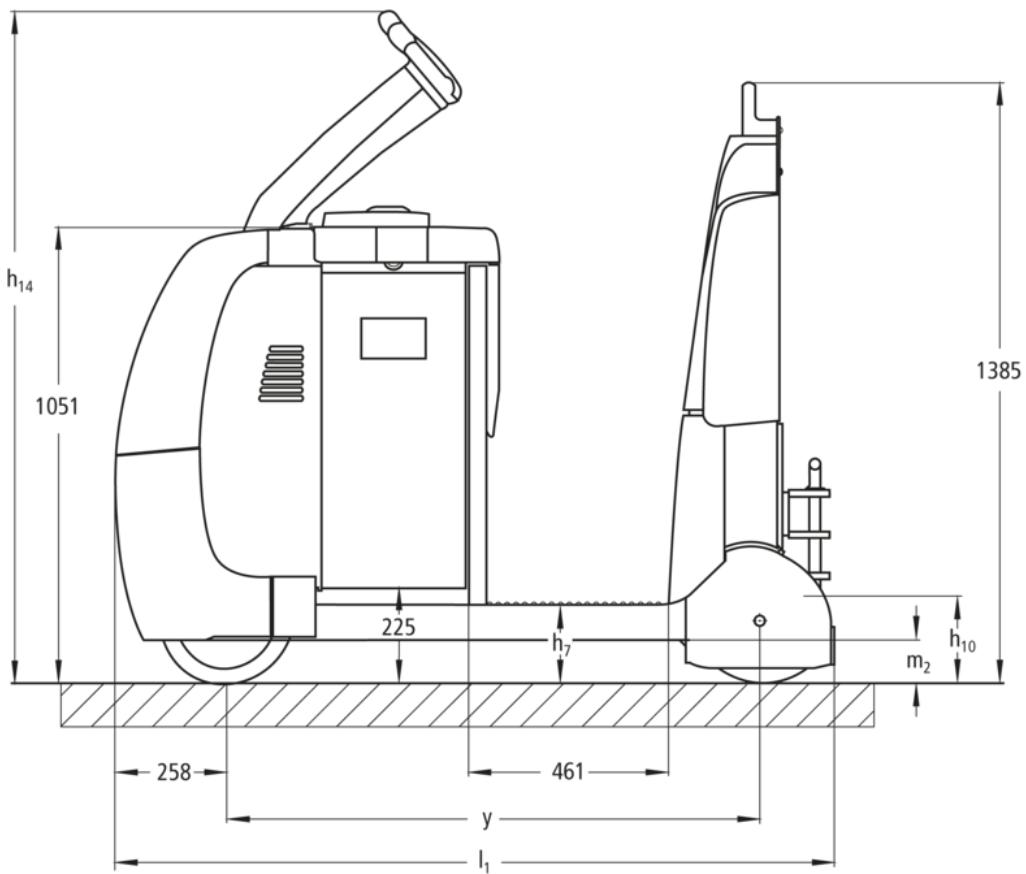

## VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		EZS C40
	1.3	Drive type		electric
	1.4	Operation		Stand-on
	1.5.3	Towing capacity	Q	kg 4000
	1.7	Rated drawbar pull	N	800
	1.9	Wheelbase	y	mm 1229
	2.1.1	Service weight (incl. battery)	kg	1185
	2.3	Axle load unladen front/rear	kg	660 / 525
Weights	3.1	Tyres		Super-elastic (SE)
	3.2	Tyre size, front		Ø 310 x 105
	3.3	Tyre size, rear		Ø 301 x 85
	3.5	Wheels, number front/back (x=driven)		1x / 2
	3.7	Tread width, rear	b11	mm 680
	4.8	Seat height/stand height	h7	mm 182
	4.9	Height of tiller handle in drive position min./max.	h14	mm 1410
Basic dimensions	4.12	Coupling height	h10	mm 158
	4.19	Total length	l1	mm 1659
	4.21.1	total width	b1	mm 810
	4.32	Ground clearance centre of wheelbase	m2	mm 100
	4.35	Turning radius	Wa	mm 1487
	5.1	Travel speed laden/unladen	km/h	8 / 12.5
	5.1.1	Reverse travel speed with/without load	km/h	6 / 6
Performance data	5.5	Drawbar pull laden/unladen	N	800 / 800
	5.6	Max. drawbar pull laden/unladen	N	2600 / 2600
	5.10	Service brake		generative
	6.1	Drive motor, performance S2 60 min	kW	2.8
	6.4	Battery voltage/nominal capacity	V / Ah	24 / 620
Electric motor/electronics	6.5	Battery weight	kg	470
	6.6.1	Energy consumption according to EN cycle	kWh/h	1.13
	6.6.2	CO2 equivalent as per EN 16796	kg/h	0.6

Other	8.1	Type of drive control		AC speedCONTROL
	10.5	Steering version		Electric steering
	10.7	Sound pressure level according to EN12053	dB (A)	66

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

- VDI no. 4.9: the height applies to the jetPILOT
- VDI no. 4.12: the value for the coupling height applies to a single plug-in coupling. Other coupling heights are available
- VDI no. 4.19: as different coupling systems are available, the specification applies to the overall length including a single plug-in coupling
- VDI no. 5.1: see tow load diagram
- VDI no. 5.5: this value is the rated drawbar pull
- VDI no. 5.6: see tow load diagram

The German production facilities in  
Norderstedt, Moosburg and Landsberg are  
certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet European  
safety requirements.



**JUNGHEINRICH**