



Trekktruck

EZS 570-5100

Trekkapasitet: 7000-10000 kg



The image contains two technical drawings of a vehicle, likely a small truck or van, showing side and top views with various dimension labels.


Side View (Top):

- 1420:** Overall height dimension on the left side.
- h_6 :** Total height dimension on the right side.
- h_7 :** Height dimension from the ground to the top of the cab.
- h_{11} :** Height dimension from the ground to the top of the rear door.
- h_{10a} , h_{10b} , h_{10c} :** Height dimensions from the ground to the top of the rear door handle area.
- m_2 :** Height dimension from the ground to the top of the front wheel hub.
- y :** Horizontal distance dimension from the front wheel hub to the rear door.
- l_5 :** Horizontal distance dimension from the rear door to the rear wheel.
- l_1 :** Overall horizontal length dimension.

Top View (Bottom):

- b_1 :** Overall width dimension on the left side.
- Wa :** Label pointing to the front wheel area.
- b_{13} :** Width dimension from the front wheel to the rear door.
- b_9 , b_{11} :** Width dimensions from the rear door to the rear wheel.
- l_3 :** Horizontal distance dimension from the front wheel to the rear wheel.

EZS 580, teknisk tegning, datablad

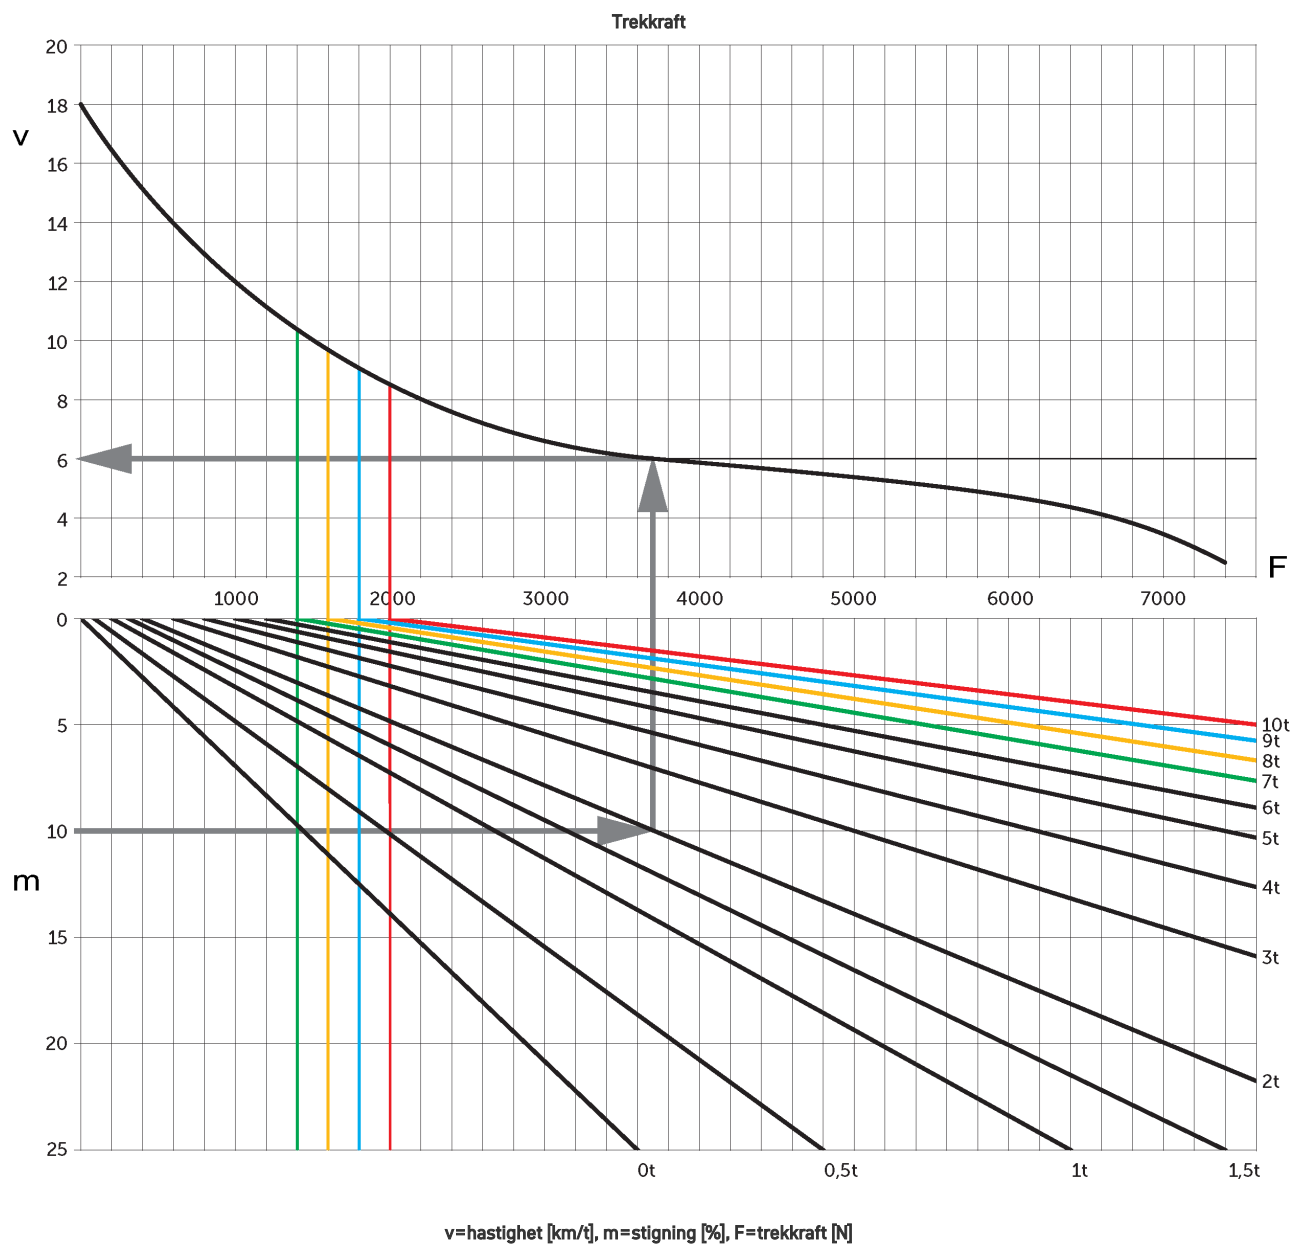

VDI-tabell

Mark	1.1	Produsent (kort navn)		Jungheinrich			
	1.2	Produsentens typebetegnelse		EZS 570	EZS 580	EZS 590	EZS 5100 XL
	1.3	Drivenhet		Elektrisk			
	1.4	Betjening		Sittende			
	1.5.3	Trekkapasitet	Q kg	7000	8000	9000	10000
	1.7	Nominell trekkraft	N	1400	1600	1800	2000
	1.9	Hjulavstand	y mm	1035			
Vekter	2.1.1	Egenvekt (inkl. batterier)	kg	1260	1320	1410	1825
	2.3	Akselbelastning uten last foran/bak	kg	580 / 680	580 / 740	620 / 790	880 / 945
Hjul, chassis	3.1	Hjul		Superelastisk (SE)			
	3.2	Hjuldimensjon foran		4.00-8	16x6-8		16x6-8
	3.3	Hjuldimensjon bak		4.00-8			
	3.5	Hjul, antall foran/bak (x = drivhjul)		1 / 2x			
	3.6	Sporvidde foran	b10 mm	0			
	3.7	Sporvidde bak	b11 mm	870			
Grunnleggende mål	4.7	Høyde på beskyttende tak (hytte)	h6 mm	2150			2140
	4.8	Setehøyde / ståhøyde	h7 mm	1040			
	4.12	Høyde tilhengerfeste	h10 mm	265			
	4.12.1	2. Høyde tilhengerfeste	mm	330			
	4.12.2	3. Høyde tilhengerfeste	mm	395			
	4.13	Lastehøyde, uten last	mm	650	640		
	4.16	Lasteflatens lengde	l3 mm	400			
	4.17	Overheng	mm	375			
	4.18	Lasteflatens bredde	b9 mm	795			
	4.19	Totallengde	l1 mm	1828			2048
	4.21.1	Totalbredde	b1 mm	996			
	4.32	Bakkeklaring målt midt mellom akslingene	m2 mm	160	130		
	4.35	Svingradius	Wa mm	1652			1866
4.36	Minste svingradius	b13 mm	600			665	
Ytelser	5.1	Kjørehastighet med/uten last	km/h	9 / 18	8,5 / 18		7,5 / 18
	5.5	Trekkraft med/uten last	N	1400 / 1400	1600 / 1600	1800 / 1800	2000 / 2000
	5.6	Maks. trekkraft med/uten last	N	5500 / 5500	6500 / 6500	7500 / 7500	7600 / 7600
	5.10	Driftsbrems		elektrisk			

Jungheinrich Norge AS

Alf Bjerckes vei 30 · 0596 Oslo

Postboks 246 Leirdal · 1011 Oslo

Telefon 02350

24-timers servicevakt 480 75 450

kontakt@jungheinrich.no

www.jungheinrich.no

De tyske produksjonsstedene i
Norderstedt, Moosburg og Landsberg er
sertifisert. Det er også vårt
reservedelslager i Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich-trucker bygges i henhold til
Eusikkerhetsbestemmelsene og CE-
forskriftene



 **JUNGHEINRICH**