





## Hand pallet truck

**AM l20 / l20p**



Lift height: 120 mm / Load capacity: 2000 kg

***JUNGHEINRICH***



AM l20 / l20p

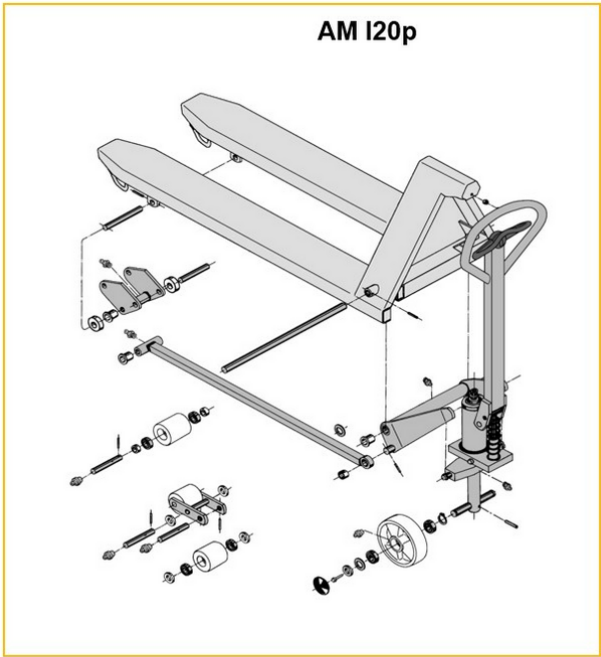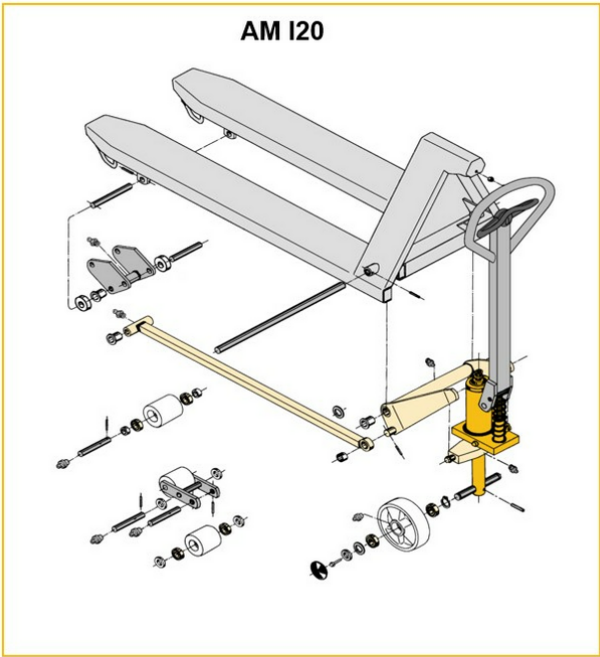

|                         |                               |
|-------------------------|-------------------------------|
| Inox AISI 316 (V4A)     | Feuerverzinkt                 |
| Inox AISI 303/304 (V2A) | Verzinkt und gelb chromatiert |

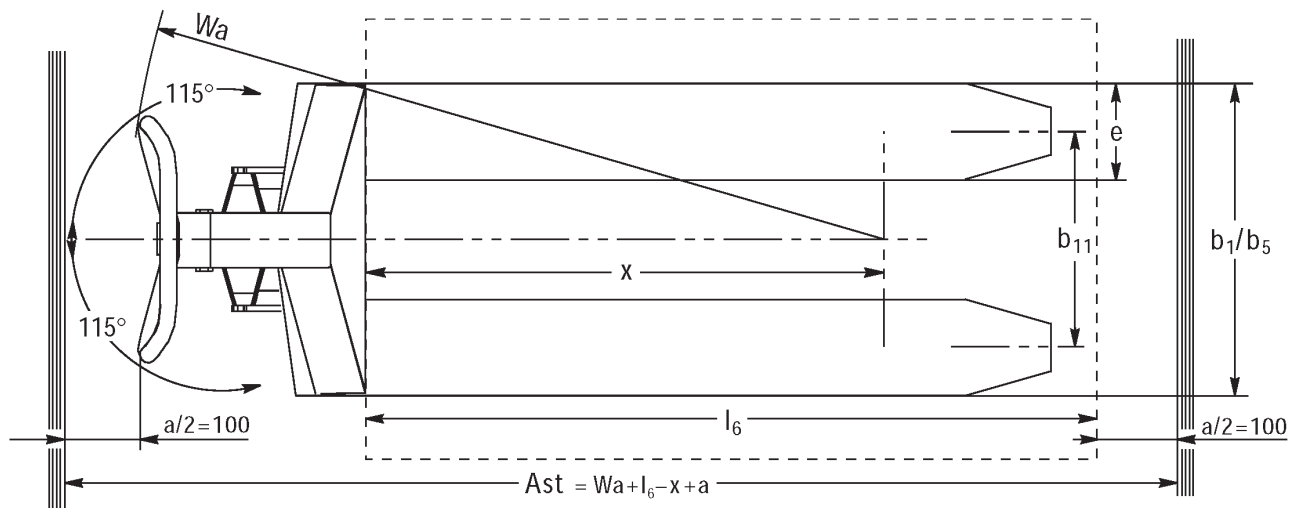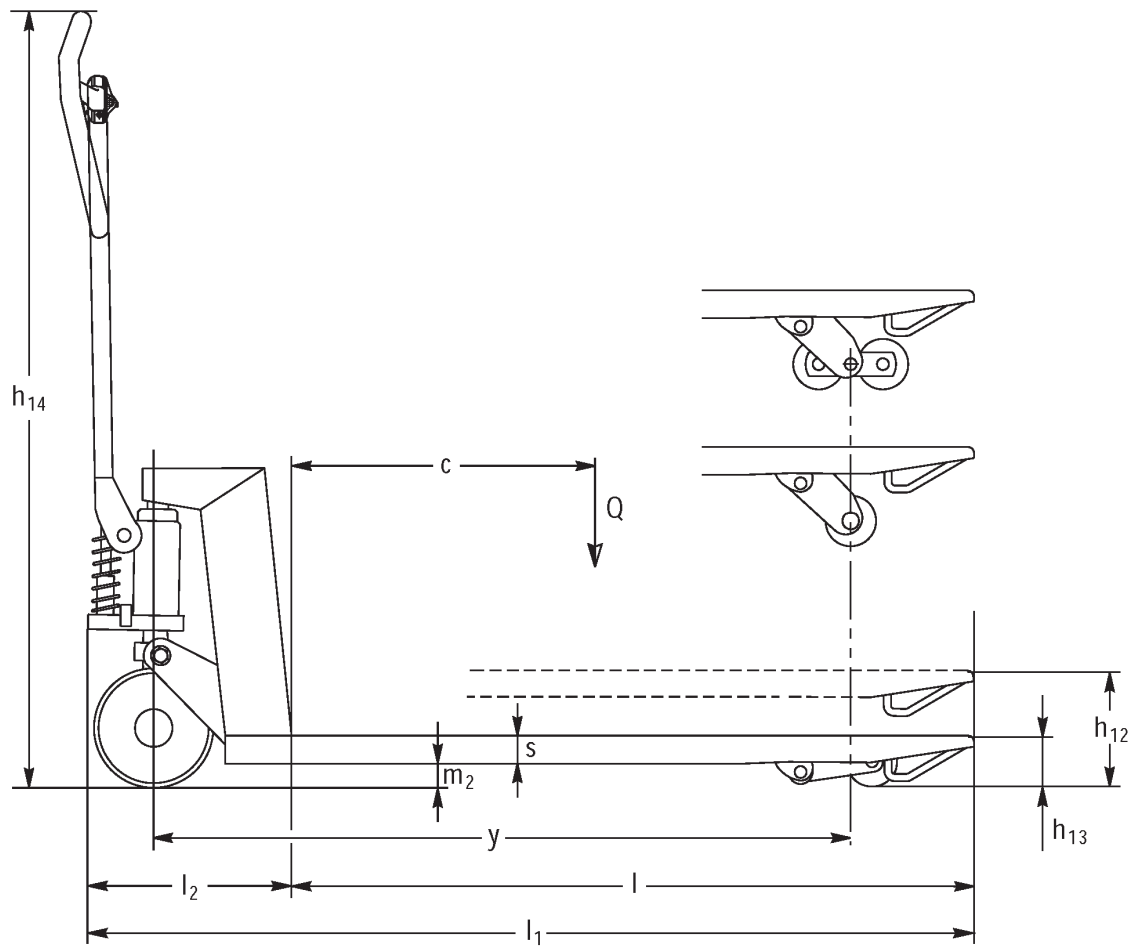

AM I20

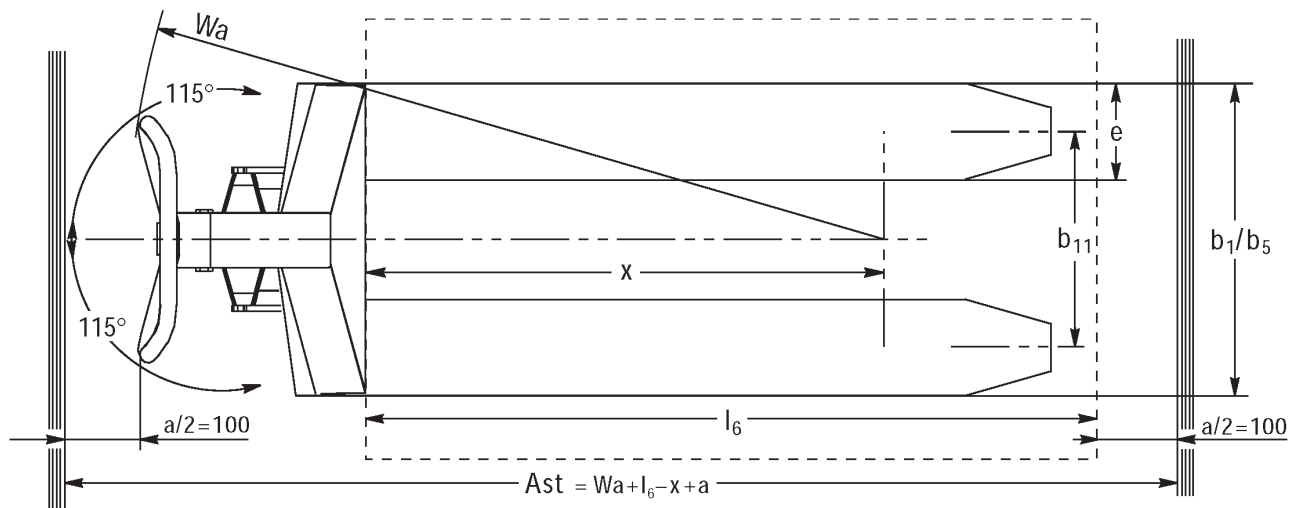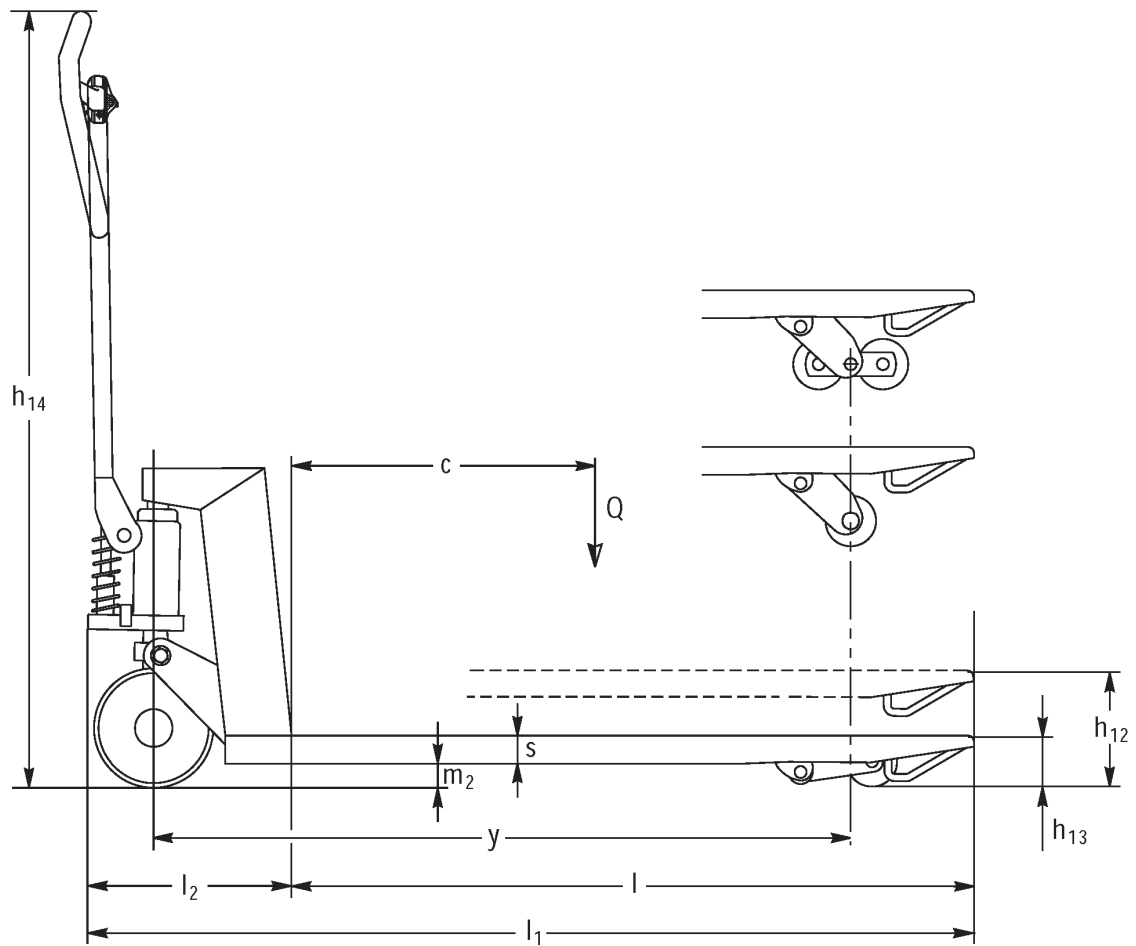

AM I20p

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.



|                          |        |                                                     |             |     |                 |         |         |      |                 |         |         |      |             |
|--------------------------|--------|-----------------------------------------------------|-------------|-----|-----------------|---------|---------|------|-----------------|---------|---------|------|-------------|
| Characteristic           | 1.1    | Manufacturer (abbreviated description)              | Other (OEM) |     |                 |         |         |      |                 |         |         |      |             |
|                          | 1.3    | Drive                                               | Manual      |     |                 |         |         |      |                 |         |         |      |             |
|                          | 1.4    | Operation                                           | Manual      |     |                 |         |         |      |                 |         |         |      |             |
|                          | 1.5    | Load capacity/load                                  | Q           | kg  | 2000            |         |         |      |                 |         |         |      |             |
|                          | 1.6    | Load centre distance                                | c           | mm  | 610             |         |         |      | 570             |         |         |      |             |
|                          | 1.9    | Wheelbase                                           | y           | mm  | 1245            |         |         |      | 1165            |         |         |      |             |
| Weights                  | 2.1    | tare weight                                         |             | kg  | 75              | 72      |         |      |                 | 69      |         |      |             |
|                          | 2.1.1  | Service weight (incl. battery)                      |             | kg  | 75              | 72      |         |      |                 | -       |         |      |             |
|                          | 2.2    | Axle load laden front/rear                          |             | -   | - / -           |         |         |      |                 |         |         |      | 636 / 1432  |
|                          |        |                                                     |             |     |                 |         |         |      |                 |         |         |      |             |
|                          | 2.3    | Axle load unladen front/rear                        |             | -   | - / -           |         |         |      |                 |         |         |      | 21 / 47     |
| Wheels/suspension system | 3.1    | Tyres                                               |             |     | V-BV            | N-BN    | V-GV    | N-GN | V-BV            | N-BN    | V-GV    | N-GN |             |
|                          | 3.2    | Tyre size, front                                    |             |     | Ø 200x50        |         |         |      |                 |         |         |      |             |
|                          | 3.3    | Tyre size, rear                                     |             |     | Ø 80x70         | Ø 80x65 | Ø 80x90 |      | Ø 80x70         | Ø 80x65 | Ø 80x90 |      |             |
|                          | 3.5    | Wheels, number front/back (x=driven)                |             |     | 2/2             |         |         |      |                 |         |         |      |             |
|                          | 3.6    | Tread width, front                                  | b10         | mm  | 120             |         |         |      |                 |         |         |      |             |
|                          | 3.7    | Tread width, rear                                   | b11         | mm  | 360             |         |         |      |                 |         |         |      |             |
|                          |        |                                                     |             |     |                 |         |         |      |                 |         |         |      |             |
| Basic dimensions         | 4.4    | Lift (h3)                                           | h3          | mm  | 120             |         |         |      |                 |         |         |      |             |
|                          | 4.9    | Height of tiller handle in drive position min./max. | h14         | mm  | 1170            |         |         |      |                 |         |         |      | 1220 / 1170 |
|                          | 4.14   | Stand height, elevated                              | h12         | mm  | 205             |         |         |      |                 |         |         |      |             |
|                          | 4.15   | Height, lowered                                     | h13         | mm  | 85              |         |         |      |                 |         |         |      |             |
|                          | 4.19   | total length                                        | l1          | mm  | 1555            |         |         |      | 1475            |         |         |      |             |
|                          | 4.20   | Length including fork shank                         | l2          | mm  | -               |         |         |      |                 |         |         |      | 340         |
|                          | 4.21.1 | total width                                         | b1          | mm  |                 |         |         |      | 520             |         |         |      |             |
|                          | 4.22   | Fork dimensions                                     | s/<br>e/l   | mm  | 51 x 160 x 1220 |         |         |      | 51 x 160 x 1140 |         |         |      |             |
|                          | 4.25   | Width across forks                                  | b5          | mm  | 520             |         |         |      |                 |         |         |      |             |
|                          | 4.32   | Ground clearance centre of wheelbase                | m2          | mm  | 34              |         |         |      |                 |         |         |      |             |
|                          | 4.34.1 | Aisle width (pallet 1000×1200 sideways)             | Ast         | mm  | 1610            |         |         |      |                 |         |         |      |             |
|                          | 4.34.2 | Aisle width (pallet 800x1200 length)                | Ast         | mm  | 1830            |         |         |      | 1810            |         |         |      |             |
|                          | 4.35   | Turning radius                                      | Wa          | mm  | 1410            |         |         |      | 1330            |         |         |      |             |
| Performance data         |        |                                                     |             |     |                 |         |         |      |                 |         |         |      |             |
|                          | 5.3    | Lowering speed laden/unladen                        |             | m/s | 0.1 / 0.05      |         |         |      |                 |         |         |      |             |

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.



|                          |                  |                                                     |           |             |                 |     |         |  |                 |    |         |  |
|--------------------------|------------------|-----------------------------------------------------|-----------|-------------|-----------------|-----|---------|--|-----------------|----|---------|--|
| Characteristic           | 1.1              | Manufacturer (abbreviated description)              |           | Other (OEM) |                 |     |         |  |                 |    |         |  |
|                          | 1.3              | Drive                                               |           | Manual      |                 |     |         |  |                 |    |         |  |
|                          | 1.4              | Operation                                           |           | Manual      |                 |     |         |  |                 |    |         |  |
|                          | 1.5              | Load capacity/load                                  | Q         | kg          | 2000            |     |         |  |                 |    |         |  |
|                          | 1.6              | Load centre distance                                | c         | mm          | 570             |     |         |  | 610             |    |         |  |
|                          | 1.9              | Wheelbase                                           | y         | mm          | 1165            |     |         |  | 1245            |    |         |  |
| Weights                  | 2.1              | tare weight                                         |           | kg          | 69              |     | 72      |  |                 | 75 |         |  |
|                          | 2.1.1            | Service weight (incl. battery)                      |           | kg          | 69              |     | 72      |  |                 | 75 |         |  |
|                          | 2.2              | Axle load laden front/rear                          |           | kg          | 636 / 1432      |     | - / -   |  |                 |    |         |  |
|                          | 2.3              | Axle load unladen front/rear                        |           | kg          | 21 / 47         |     | - / -   |  |                 |    |         |  |
| Wheels/suspension system | 3.1              | Tyres                                               |           |             | N-GN            |     | V-GV    |  | N-BN            |    | V-BV    |  |
|                          | 3.2              | Tyre size, front                                    |           |             | Ø 200x50        |     |         |  |                 |    |         |  |
|                          | 3.3              | Tyre size, rear                                     |           |             | Ø 80x90         |     | Ø 80x65 |  | Ø 80x70         |    | Ø 80x90 |  |
|                          | 3.5              | Wheels, number front/back (x=driven)                |           |             | 2/2             |     |         |  |                 |    |         |  |
|                          | 3.6              | Tread width, front                                  | b10       | mm          | 120             |     |         |  |                 |    |         |  |
|                          | 3.7              | Tread width, rear                                   | b11       | mm          | 360             |     |         |  |                 |    |         |  |
|                          | Basic dimensions | 4.4                                                 | Lift (h3) | h3          | mm              | 120 |         |  |                 |    |         |  |
| 4.9                      |                  | Height of tiller handle in drive position min./max. | h14       | mm          | 1170            |     |         |  |                 |    |         |  |
| 4.14                     |                  | Stand height, elevated                              | h12       | mm          | 200             |     |         |  |                 |    |         |  |
| 4.15                     |                  | Height, lowered                                     | h13       | mm          | 85              |     |         |  |                 |    |         |  |
| 4.19                     |                  | total length                                        | l1        | mm          | 1475            |     |         |  | 1555            |    |         |  |
| 4.20                     |                  | Length including fork shank                         | l2        | mm          | 340             |     | -       |  |                 |    |         |  |
| 4.21.1                   |                  | total width                                         | b1        | mm          | 520             |     |         |  |                 |    |         |  |
| 4.22                     |                  | Fork dimensions                                     | s/<br>e/l | mm          | 51 x 160 x 1140 |     |         |  | 51 x 160 x 1220 |    |         |  |
| 4.25                     |                  | Width across forks                                  | b5        | mm          | 520             |     |         |  |                 |    |         |  |
| 4.32                     |                  | Ground clearance centre of wheelbase                | m2        | mm          | 38              |     |         |  |                 |    |         |  |
| 4.34.1                   |                  | Aisle width (pallet 1000×1200 sideways)             | Ast       | mm          | 1610            |     |         |  |                 |    |         |  |
| 4.34.2                   |                  | Aisle width (pallet 800x1200 length)                | Ast       | mm          | 1810            |     |         |  | 1830            |    |         |  |
| 4.35                     |                  | Turning radius                                      | Wa        | mm          | 1330            |     |         |  | 1410            |    |         |  |
| Performance data         |                  |                                                     |           |             |                 |     |         |  |                 |    |         |  |
|                          | 5.3              | Lowering speed laden/unladen                        |           | m/s         | 0.1 / 0.05      |     |         |  |                 |    |         |  |

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

|                                                                                                                                                                                                   |                |                                                     |           |      |                |      |         |         |                |      |         |         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------------|-----------|------|----------------|------|---------|---------|----------------|------|---------|---------|
| Characteristic                                                                                                                                                                                    | 1.1            | Manufacturer (abbreviated description)              |           |      | Other (OEM)    |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 1.3            | Drive                                               |           |      | Manual         |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 1.4            | Operation                                           |           |      | Manual         |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 1.5            | Load capacity/load                                  | Q         | kg   | 2000           |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 1.6            | Load centre distance                                | c         | mm   | 405            |      |         |         | 485            |      |         |         |
|                                                                                                                                                                                                   | 1.9            | Wheelbase                                           | y         | mm   | 835            |      |         |         | 995            |      |         |         |
| Weights                                                                                                                                                                                           | 2.1            | tare weight                                         |           | kg   | 65             |      | 69      |         |                |      | 72      |         |
|                                                                                                                                                                                                   | 2.1.1          | Service weight (incl. battery)                      |           | kg   | 65             |      | 69      |         |                |      | 72      |         |
| Wheels/suspension system                                                                                                                                                                          | 3.1            | Tyres                                               |           |      | N-GN           | V-GV | V-BV    | N-BN    | N-GN           | V-GV | N-BN    | V-BV    |
|                                                                                                                                                                                                   | 3.2            | Tyre size, front                                    |           |      | Ø 200x50       |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 3.3            | Tyre size, rear                                     |           |      | Ø 80x90        |      | Ø 80x70 | Ø 80x65 | Ø 80x90        |      | Ø 80x65 | Ø 80x70 |
|                                                                                                                                                                                                   | 3.5            | Wheels, number front/back (x=driven)                |           |      | 2/2            |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 3.6            | Tread width, front                                  | b10       | mm   | 120            |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 3.7            | Tread width, rear                                   | b11       | mm   | 520            |      |         |         |                |      |         |         |
| Basic dimensions                                                                                                                                                                                  | 4.4            | Lift (h3)                                           | h3        | mm   | 120            |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 4.9            | Height of tiller handle in drive position min./max. | h14       | mm   | 1170           |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 4.14           | Stand height, elevated                              | h12       | mm   | 200            |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 4.15           | Height, lowered                                     | h13       | mm   | 85             |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 4.19           | total length                                        | l1        | mm   | 1145           |      |         |         | 1305           |      |         |         |
|                                                                                                                                                                                                   | 4.21.1         | total width                                         | b1        | mm   | 680            |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 4.22           | Fork dimensions                                     | s/<br>e/l | mm   | 51 x 160 x 810 |      |         |         | 51 x 160 x 970 |      |         |         |
|                                                                                                                                                                                                   | 4.25           | Width across forks                                  | b5        | mm   | 680            |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 4.32           | Ground clearance centre of wheelbase                | m2        | mm   | 38             |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 4.34.1         | Aisle width (pallet 1000×1200 sideways)             | Ast       | mm   | 1610           |      |         |         |                |      |         |         |
|                                                                                                                                                                                                   | 4.34.2         | Aisle width (pallet 800x1200 length)                | Ast       | mm   | 1810           |      |         |         |                |      |         |         |
| 4.35                                                                                                                                                                                              | Turning radius | Wa                                                  | mm        | 1000 |                |      |         | 1160    |                |      |         |         |
| Performance data                                                                                                                                                                                  | 5.3            | Lowering speed laden/unladen                        |           | m/s  | 0.1 / 0.05     |      |         |         |                |      |         |         |
| - This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values. |                |                                                     |           |      |                |      |         |         |                |      |         |         |



The German production facilities in  
Norderstedt, Moosburg and Landsberg are  
certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet European  
safety requirements.



 **JUNGHEINRICH**