



Electric tow tractor

EZS 570-5100

Towing capacity: 7000-10000 kg



The image contains two technical drawings of a vehicle, likely a small truck or van, showing side and top views with various dimensions.


Side View (Top):

- Dimensions:**
 - 1420 : Overall height from the ground to the top of the cab.
 - h_6 : Height from the ground to the top of the roof.
 - h_7 : Height from the ground to the top of the rear window.
 - h_{11} : Height from the ground to the top of the rear door.
 - h_{10a} , h_{10b} , h_{10c} : Heights from the ground to the bottom of the rear door, rear window, and roof respectively.
 - m_2 : Height from the ground to the center of the rear wheel.
 - y : Horizontal distance from the front of the vehicle to the center of the rear wheel.
 - l_1 : Overall wheelbase.
 - l_5 : Distance from the center of the rear wheel to the rear of the vehicle.
- Features:** The side view shows the cab, rear window, rear door, and rear wheel. Dashed lines indicate the position of the front wheel and the front of the vehicle.

Top View (Bottom):

- Dimensions:**
 - b_1 : Overall width of the vehicle.
 - Wa : Width of the front wheel track.
 - b_{13} : Width of the rear door.
 - b_9 : Width of the rear window.
 - b_{11} : Width of the rear of the vehicle.
 - l_3 : Distance from the front of the vehicle to the rear of the rear door.
- Features:** The top view shows the front wheel, front door, rear window, rear door, and rear of the vehicle. A curved line indicates the front of the vehicle.

EVS 580, technical drawing, data sheet

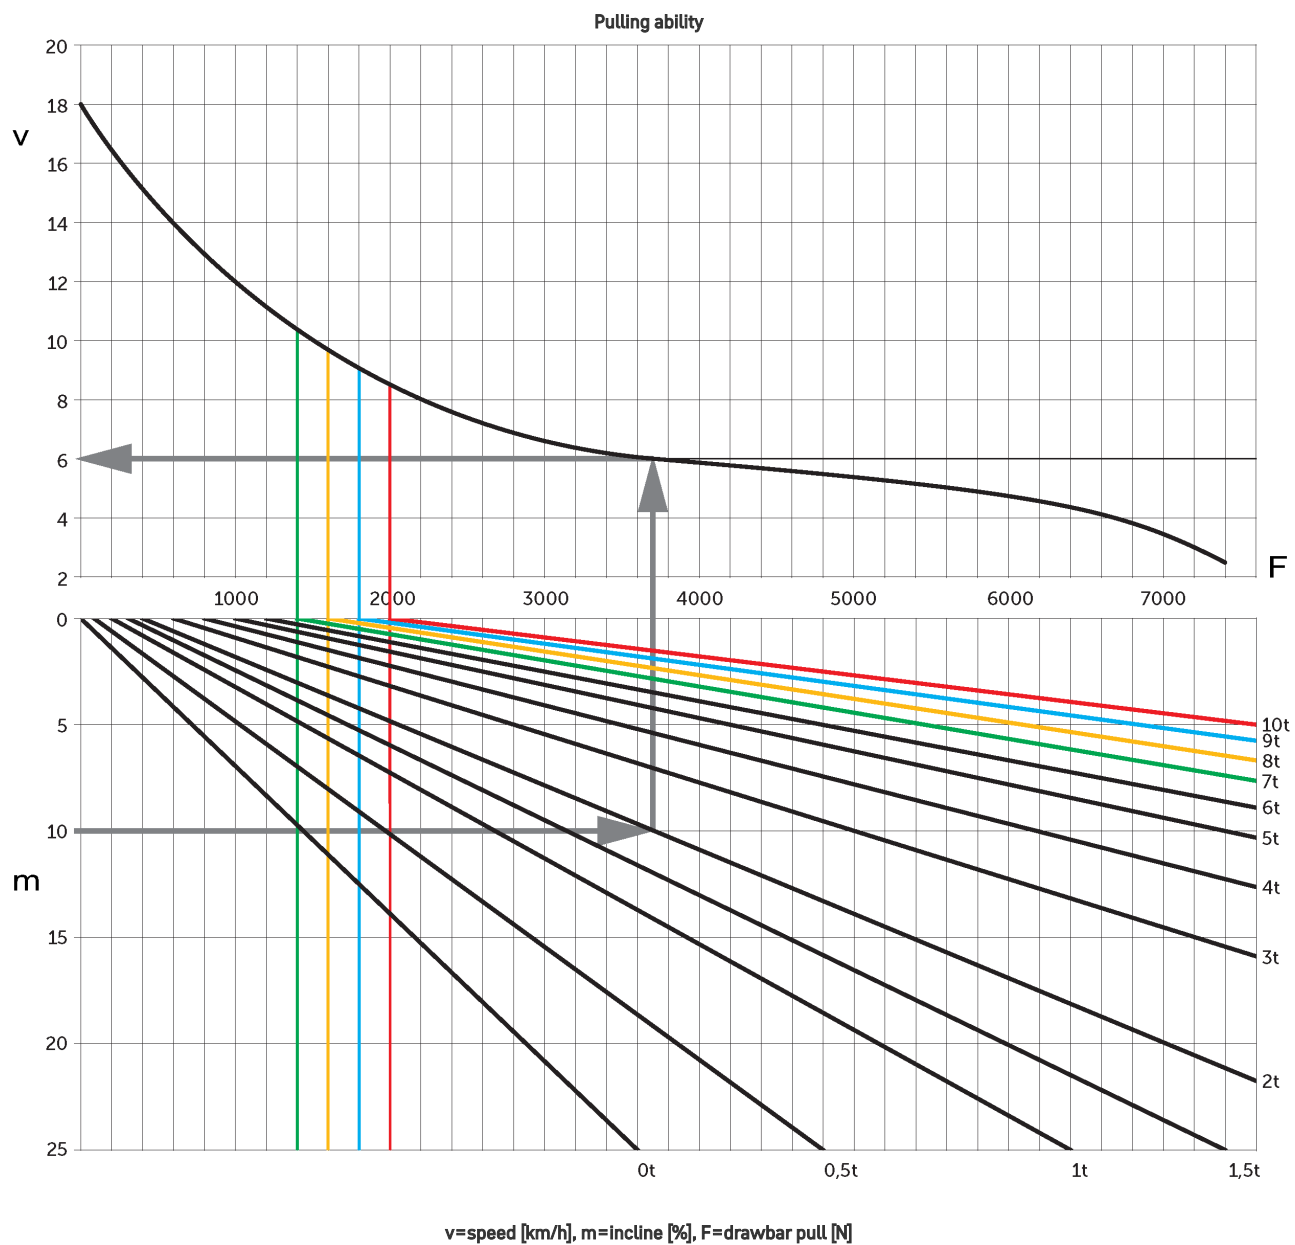

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich			
	1.2	Manufacturer's type designation		EZS 570	EZS 580	EZS 590	EZS 5100 XL
	1.3	Drive type		electric			
	1.4	Operation		Seat			
	1.5.3	Towing capacity	Q kg	7000	8000	9000	10000
	1.7	Rated drawbar pull	N	1400	1600	1800	2000
	1.9	Wheelbase	y mm	1035			
Weights	2.1.1	Service weight (incl. battery)	kg	1260	1320	1410	1825
	2.3	Axle load unladen front/rear	kg	580 / 680	580 / 740	620 / 790	880 / 945
Wheels/chassis	3.1	Tyres		Super-elastic (SE)			
	3.2	Tyre size, front		4.00-8	16x6-8		16x6-8
	3.3	Tyre size, rear		4.00-8			
	3.5	Wheels, number front/back (x=driven)		1 / 2x			
	3.6	Tread width, front	b10 mm	0			
	3.7	Tread width, rear	b11 mm	870			
Basic dimensions	4.7	Height of overhead guard (cab)	h6 mm	2150			2140
	4.8	Seat height/stand height	h7 mm	1040			
	4.12	Coupling height	h10 mm	265			
	4.12.1	2. Coupling height	mm	330			
	4.12.2	3. Coupling height	mm	395			
	4.13	Loading height, unladen	mm	650	640		
	4.16	Loading area length	l3 mm	400			
	4.17	Overhang length	mm	375			
	4.18	Loading area width	b9 mm	795			
	4.19	Total length	l1 mm	1828			2048
	4.21.1	total width	b1 mm	996			
	4.32	Ground clearance centre of wheelbase	m2 mm	160	130		
	4.35	Turning radius	Wa mm	1652			1866
4.36	Smallest pivot point distance	b13 mm	600			665	
Performance data	5.1	Travel speed laden/unladen	km/h	9 / 18	8.5 / 18		7.5 / 18
	5.5	Drawbar pull laden/unladen	N	1400 / 1400	1600 / 1600	1800 / 1800	2000 / 2000
	5.6	Max. drawbar pull laden/unladen	N	5500 / 5500	6500 / 6500	7500 / 7500	7600 / 7600
	5.10	Service brake		electric			

Electric motor/electronics	6.1	Drive motor, performance S2 60 min	kW	4.5			
	6.4	Battery voltage/nominal capacity	V / Ah	48 / 375			48 / 625
	6.5	Battery weight	kg	575			860
	6.6	Energy consumption according to VDI cycle	kWh/h	0			
	6.6.1	Energy consumption according to EN cycle	kWh/h	1.33	1.5	1.67	1.84
	6.6.2	CO2 equivalent according to EN ISO 23308	kg/h0	0.7	0.8	0.9	1
Other	8.1	Type of drive control		Impulse/AC			
	10.7	Sound pressure level according to EN12053	dB (A)	62			

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in
Norderstedt, Moosburg and Landsberg are
certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European
safety requirements.



 **JUNGHEINRICH**