





## Scissor lift hand pallet truck

**AMX 10 / 10e**



Lift height: 714 mm / Load capacity: 1000 kg

**JUNGHEINRICH**

AMX 10 / 10e

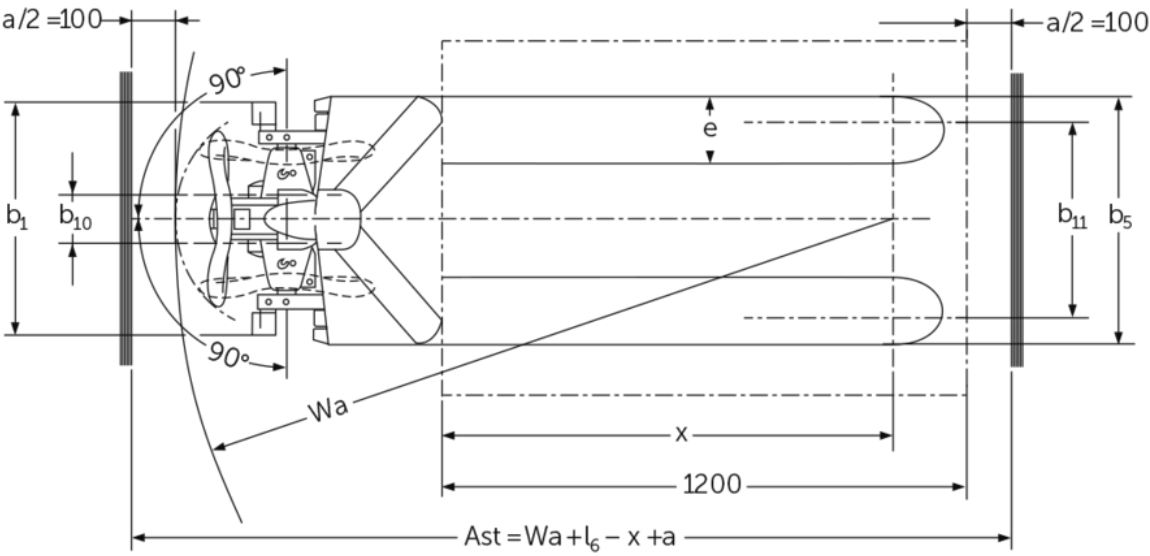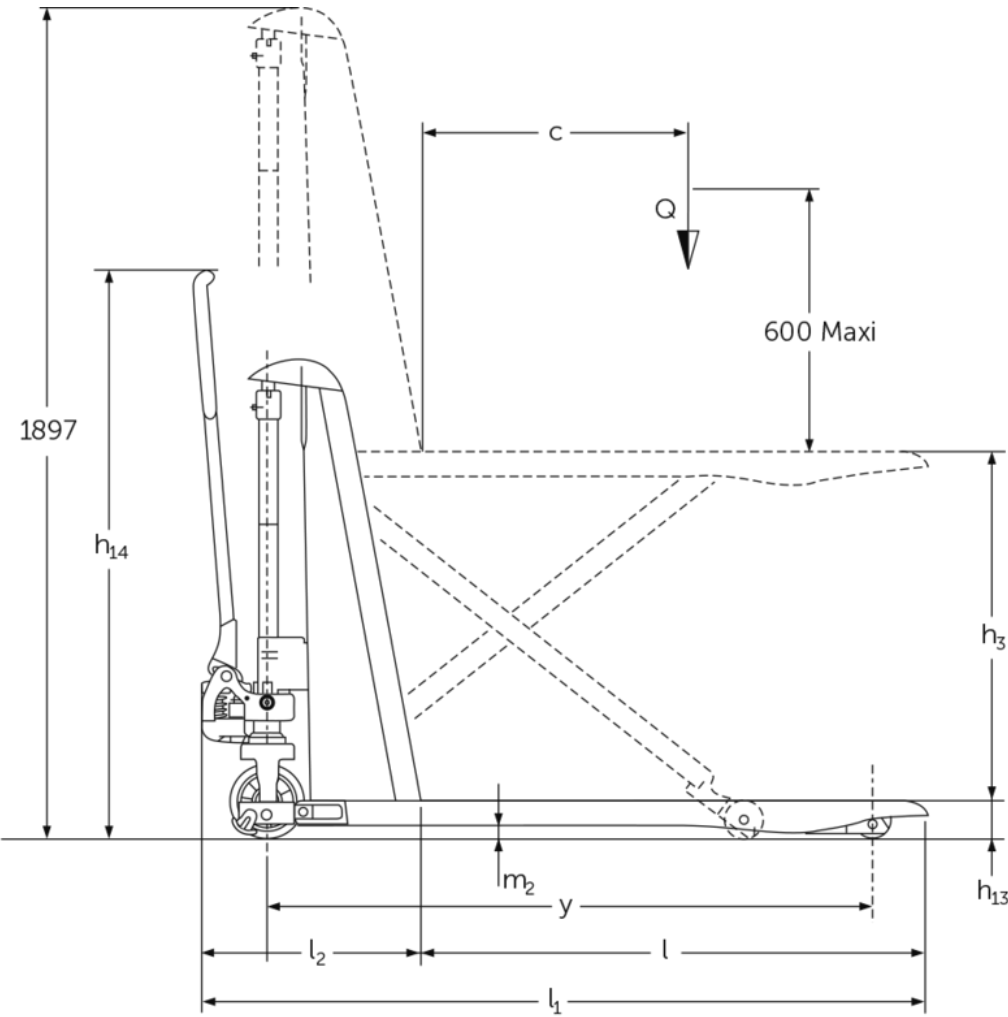

AMX 115 / 115p

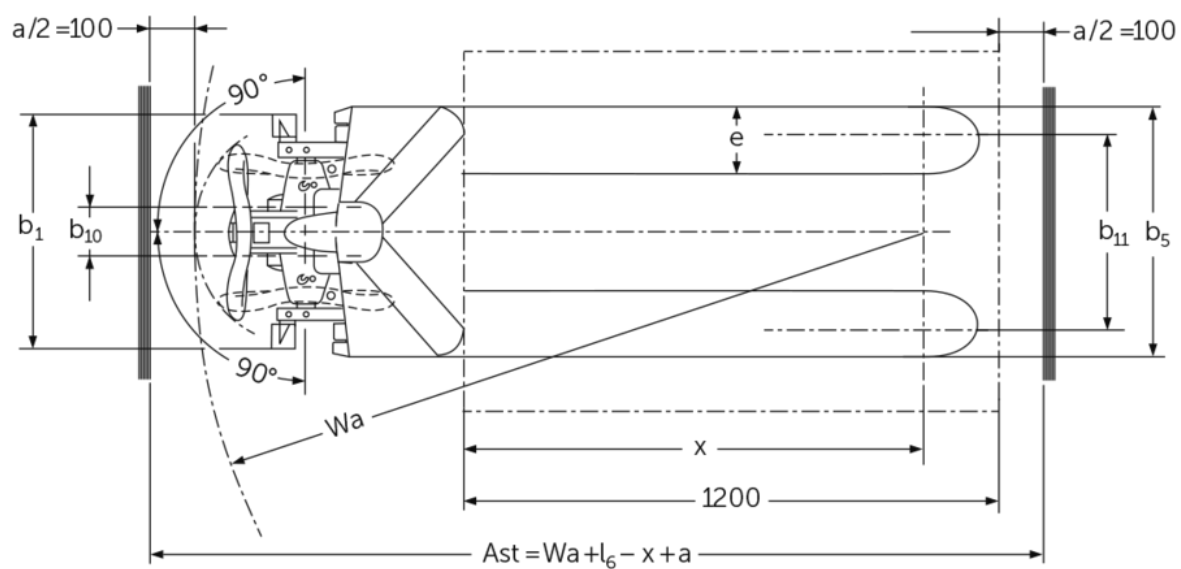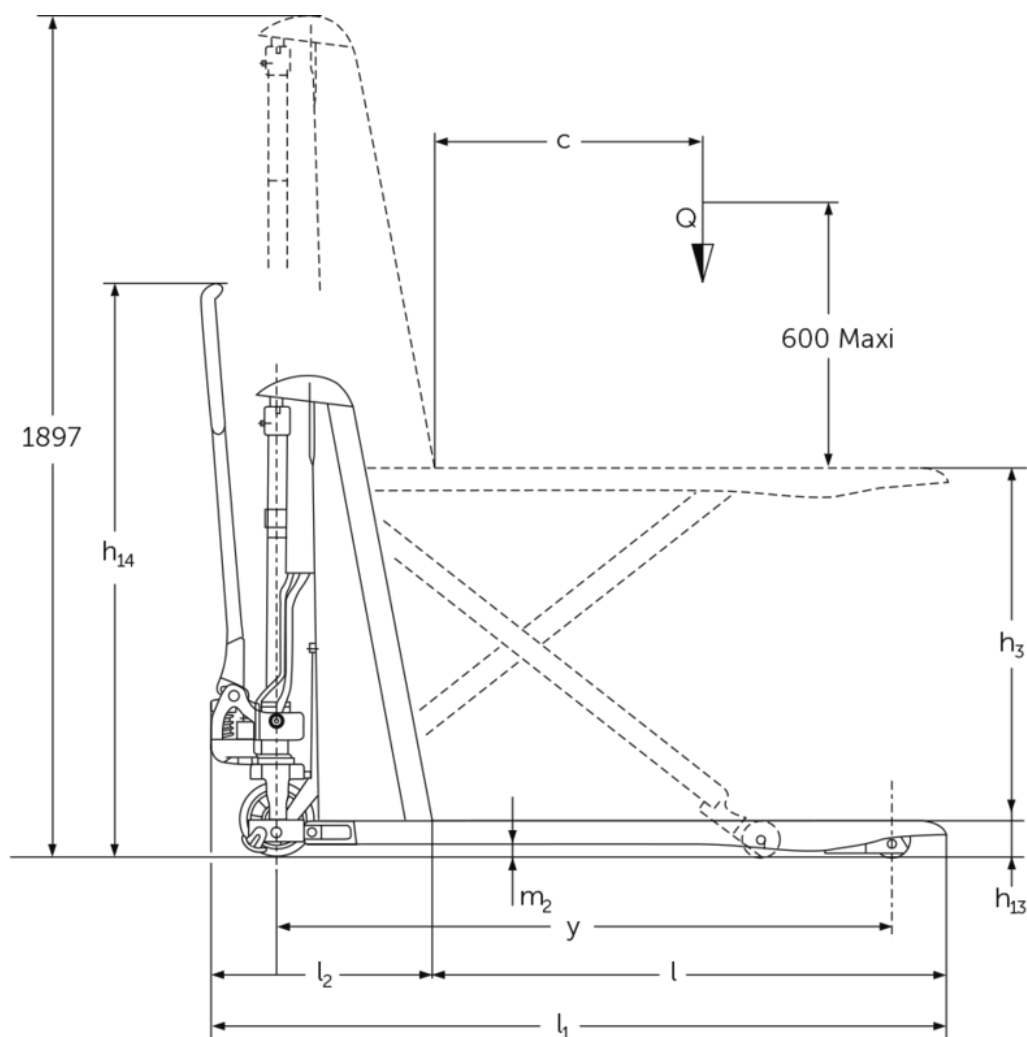

AMX I15e / I15ep

## VDI table

|                  |        |                                                     |           |             |                 |       |            |      |            |                 |      |            |      |
|------------------|--------|-----------------------------------------------------|-----------|-------------|-----------------|-------|------------|------|------------|-----------------|------|------------|------|
| Characteristic   | 1.1    | Manufacturer (abbreviated description)              |           | Other (OEM) |                 |       |            |      |            |                 |      |            |      |
|                  | 1.2    | Manufacturer's type designation                     |           | AMX 10e     |                 |       |            |      | AMX 10     |                 |      |            |      |
|                  | 1.3    | Drive type                                          |           | electric    | Manual          |       |            |      |            |                 |      |            |      |
|                  | 1.4    | Operation                                           |           | Manual      |                 |       |            |      |            |                 |      |            |      |
|                  | 1.5    | Load capacity/load                                  | Q         | kg          | 1000            |       |            |      |            |                 |      |            |      |
|                  | 1.6    | Load centre distance                                | c         | mm          | 600             |       |            |      |            |                 |      |            |      |
|                  | 1.9    | Wheelbase                                           | y         | mm          | 1383            | -     |            |      | 1383       | -               |      |            |      |
| Weights          | 2.1    | Netto weight                                        |           | kg          | 195             |       |            |      |            | 157             |      |            |      |
|                  | 2.2    | Axle load laden front/rear                          |           | kg          | 443 / 752       | - / - |            |      | 406 / 751  | - / -           |      |            |      |
|                  | 2.3    | Axle load unladen front/rear                        |           | kg          | 136 / 59        | - / - |            |      | 101 / 56   | - / -           |      |            |      |
| Wheels/chassis   | 3.1    | Tyres                                               |           |             | C-GN            | N-GN  | V-GV       | N-GN | C-GN       | V-GV            | C-GN | N-GN       |      |
|                  | 3.2    | Tyre size, front                                    |           |             | Ø 170 x 50      | -     |            |      | Ø 170 x 50 |                 | -    |            |      |
|                  | 3.3    | Tyre size, rear                                     |           |             | Ø 82 x 62       | -     |            |      | Ø 82 x 62  |                 | -    |            |      |
|                  | 3.5    | Wheels, number front/back (x=driven)                |           |             | 2/2             | -     |            |      | 2/2        |                 | -    |            |      |
|                  | 3.6    | Tread width, front                                  | b10       | mm          | 109             | -     |            |      | 109        |                 | -    |            |      |
|                  | 3.7    | Tread width, rear                                   | b11       | mm          | 440             | -     |            |      | 440        |                 | -    |            |      |
| Basic dimensions | 4.4    | Lift (h3)                                           | h3        | mm          | 714             |       |            |      |            |                 |      |            |      |
|                  | 4.5    | Extended mast height (h4)                           | h4        | mm          | 1897            | -     |            |      | 1897       |                 | -    |            |      |
|                  | 4.9    | Height of tiller handle in drive position min./max. | h14       | mm          | 1299            | -     |            |      | 1299       |                 | -    |            |      |
|                  | 4.15   | Height, lowered                                     | h13       | mm          | 86              |       |            |      |            |                 |      |            |      |
|                  | 4.19   | Total length                                        | l1        | mm          | 1650            |       |            |      |            |                 |      |            |      |
|                  | 4.20   | Length including fork shank                         | l2        | mm          | 500             | -     |            |      | 500        |                 | -    |            |      |
|                  | 4.21.1 | total width                                         | b1        | mm          | 560             |       | 680        |      |            | 560             |      |            |      |
|                  | 4.22   | Fork dimensions                                     | s/<br>e/l | mm          | 53 x 150 x 1150 |       | 150 x 1150 |      |            | 53 x 150 x 1150 |      | 150 x 1150 |      |
|                  | 4.25   | Width across forks                                  | b5        | mm          | 560             |       | 680        |      |            | 560             |      |            |      |
|                  | 4.32   | Ground clearance centre of wheelbase                | m2        | mm          | 30              |       | -          |      |            | 30              |      | -          |      |
|                  | 4.34.2 | Aisle width (pallet 800x1200 length)                | Ast       | mm          | 2005            |       | -          |      |            | 2005            |      | -          |      |
|                  | 4.35   | Turning radius                                      | Wa        | mm          | -               |       |            |      |            |                 |      |            | 1635 |
| Performance data | 5.3    | Lowering speed laden/unladen                        |           | m/s         | 0.13 / 0.05     |       | - / -      |      |            | 0.11 / 0.04     |      | - / -      |      |

|                            |     |                                  |        |         |  |   |
|----------------------------|-----|----------------------------------|--------|---------|--|---|
| Electric motor/electronics | 6.2 | Lift motor, performance with S3  | kW     | 0.5     |  | - |
|                            | 6.4 | Battery voltage/nominal capacity | V / Ah | 12 / 70 |  | - |
|                            | 6.5 | Battery weight                   | kg     | 24      |  | - |

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

|                                                                                                                                                                                                   |        |                                        |       |    |             |      |      |      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------------------------------------|-------|----|-------------|------|------|------|
| Characteristic                                                                                                                                                                                    | 1.1    | Manufacturer (abbreviated description) |       |    | Other (OEM) |      |      |      |
|                                                                                                                                                                                                   | 1.2    | Manufacturer's type designation        |       |    | AMX 10      |      |      |      |
|                                                                                                                                                                                                   | 1.3    | Drive type                             |       |    | Manual      |      |      |      |
|                                                                                                                                                                                                   | 1.4    | Operation                              |       |    | Manual      |      |      |      |
|                                                                                                                                                                                                   | 1.5    | Load capacity/load                     | Q     | kg | 1000        |      |      |      |
|                                                                                                                                                                                                   | 1.6    | Load centre distance                   | c     | mm | 600         |      |      |      |
| Weights                                                                                                                                                                                           | 2.1    | Netto weight                           |       | kg | 157         |      |      |      |
|                                                                                                                                                                                                   |        |                                        |       |    |             |      |      |      |
| Wheels/chassis                                                                                                                                                                                    | 3.1    | Tyres                                  |       |    | V-GV        | N-GN | C-GN | V-GV |
|                                                                                                                                                                                                   |        |                                        |       |    |             |      |      |      |
| Basic dimensions                                                                                                                                                                                  | 4.4    | Lift (h3)                              | h3    | mm | 714         |      |      |      |
|                                                                                                                                                                                                   | 4.15   | Height, lowered                        | h13   | mm | 86          |      |      |      |
|                                                                                                                                                                                                   | 4.19   | Total length                           | l1    | mm | 1650        |      |      |      |
|                                                                                                                                                                                                   | 4.21.1 | total width                            | b1    | mm | 560         | 680  |      |      |
|                                                                                                                                                                                                   | 4.22   | Fork dimensions                        | s/e/l | mm | 150 x 1150  |      |      |      |
|                                                                                                                                                                                                   | 4.25   | Width across forks                     | b5    | mm | 560         | 680  |      |      |
| - This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values. |        |                                        |       |    |             |      |      |      |

The German production facilities in  
Norderstedt, Moosburg and Landsberg are  
certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet European  
safety requirements.



 **JUNGHEINRICH**