





## Electric tow tractor


### EZS 010

Towing capacity: 1000 kg

EZS 010

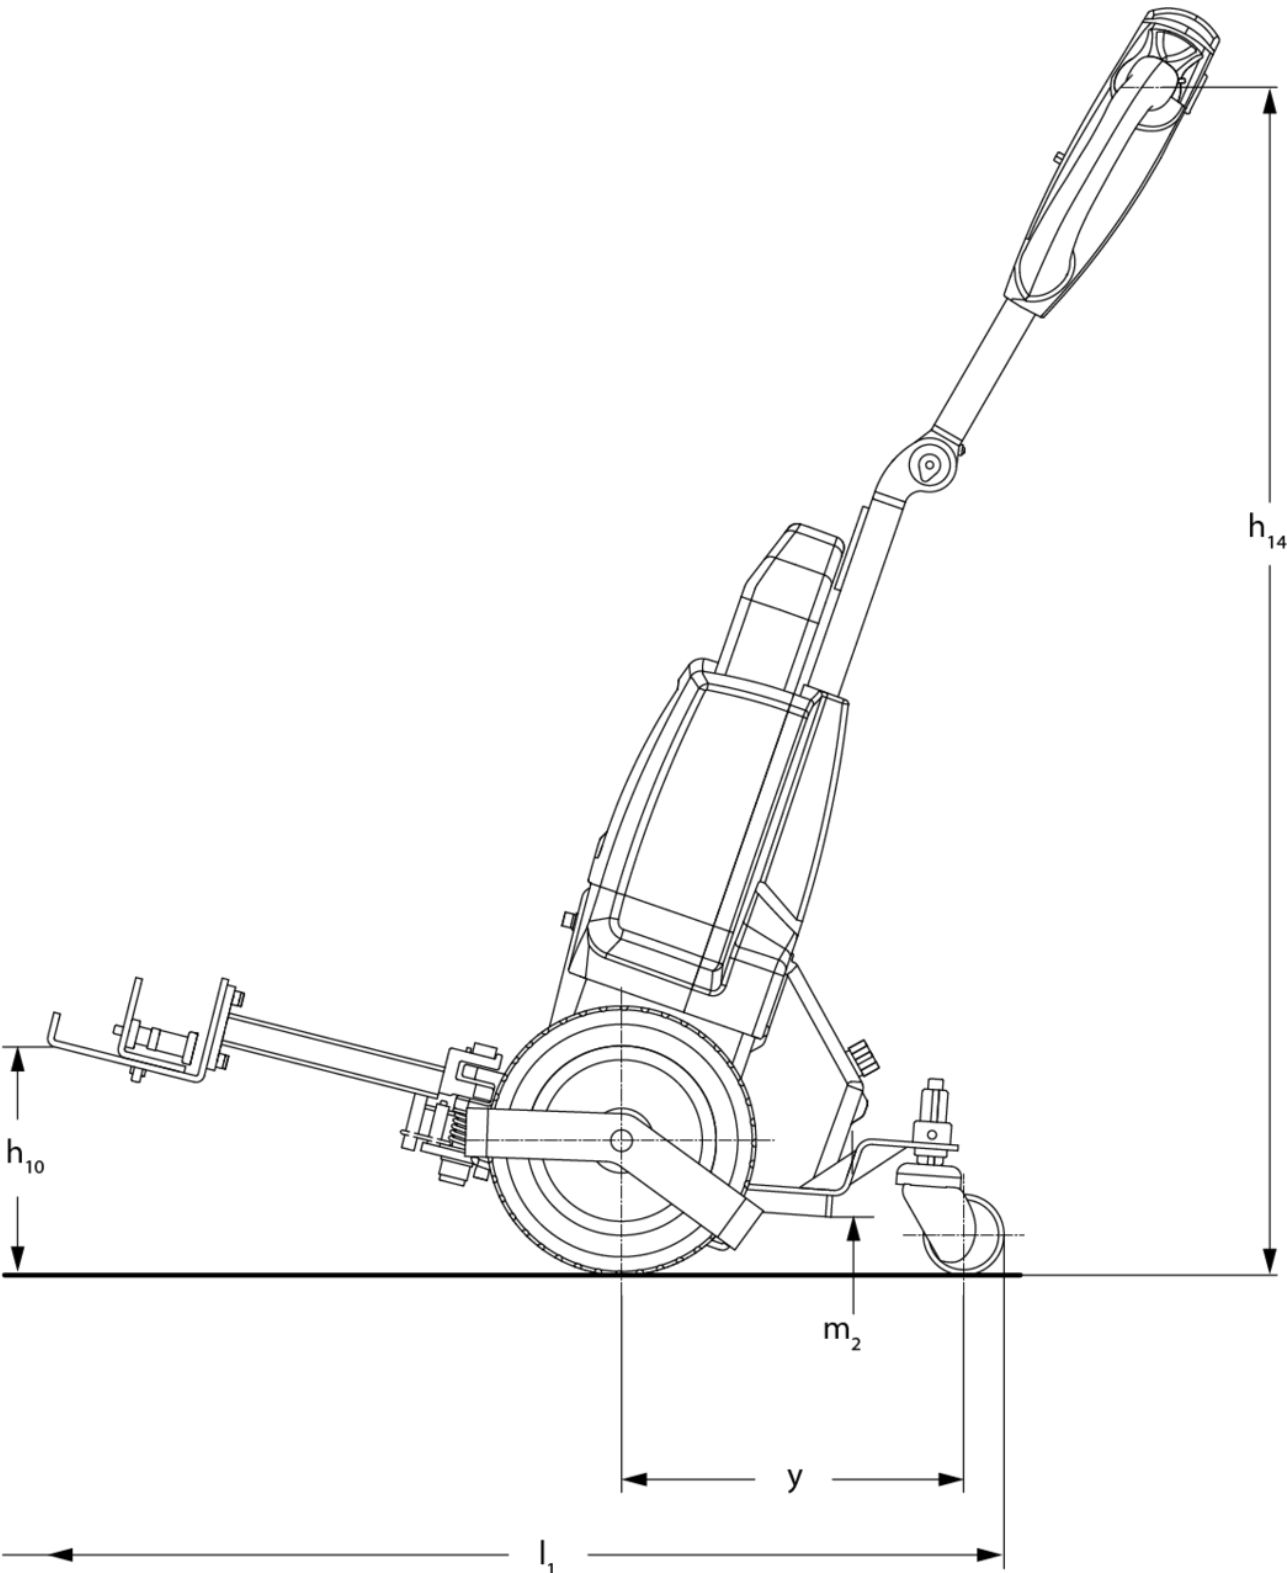

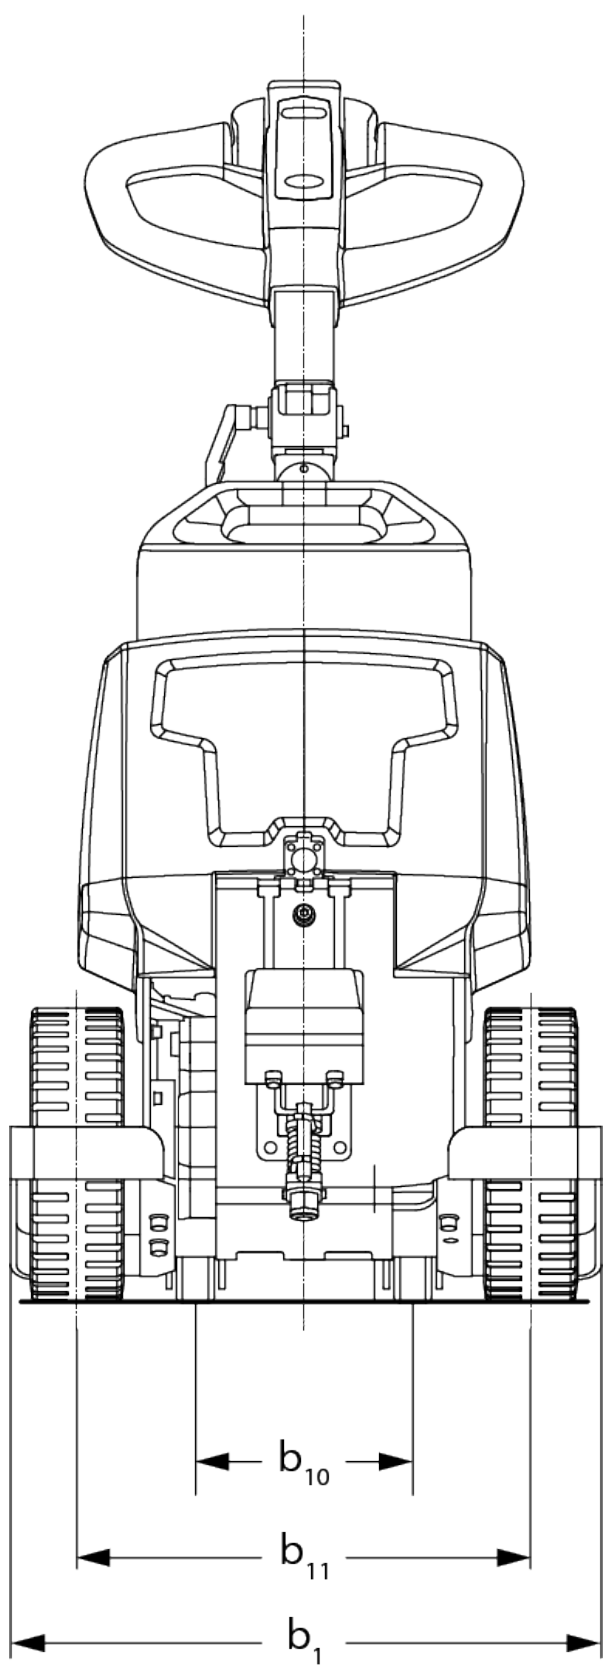

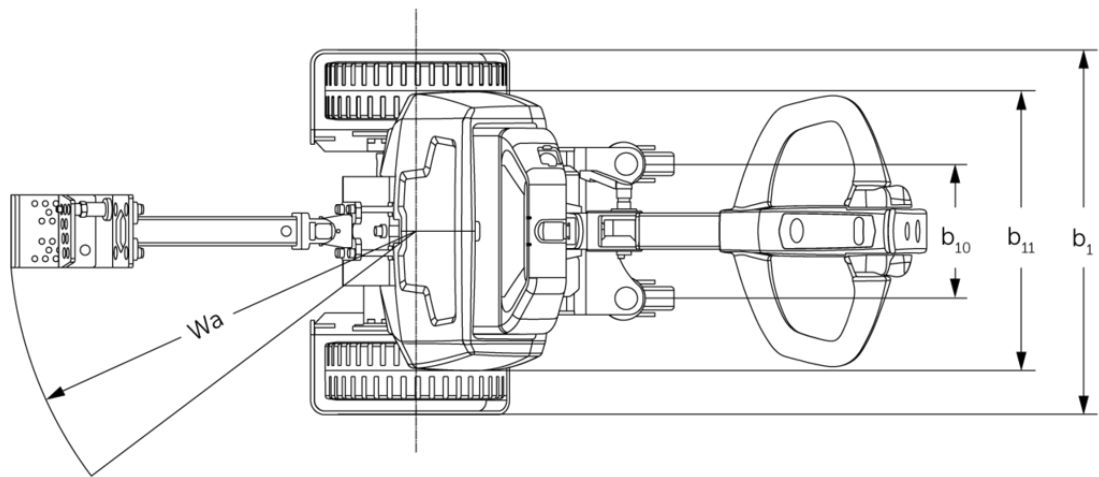

## VDI table

|                            |        |                                                     |     |        |                 |
|----------------------------|--------|-----------------------------------------------------|-----|--------|-----------------|
| Characteristic             | 1.1    | Manufacturer (abbreviated description)              |     |        | Other (OEM)     |
|                            | 1.2    | Manufacturer's type designation                     |     |        | EZS 010         |
|                            | 1.3    | Drive type                                          |     |        | electric        |
|                            | 1.4    | Operation                                           |     |        | Pedestrian      |
|                            | 1.5.3  | Towing capacity                                     | Q   | kg     | 1000            |
|                            | 1.7    | Rated drawbar pull                                  |     | N      | 200             |
|                            | 1.9    | Wheelbase                                           | y   | mm     | 325             |
| Weights                    | 2.1    | Netto weight                                        |     | kg     | 67              |
|                            | 2.3    | Axle load unladen front/rear                        |     | kg     | 55 / 19         |
| Wheels/chassis             | 3.2    | Tyre size, front                                    |     |        | 250x80          |
|                            | 3.3    | Tyre size, rear                                     |     |        | 75x32           |
|                            | 3.5    | Wheels, number front/back (x=driven)                |     |        | 2x+2/-          |
|                            | 3.6    | Tread width, front                                  | b10 | mm     | 185             |
|                            | 3.7    | Tread width, rear                                   | b11 | mm     | 385             |
| Basic dimensions           | 4.9    | Height of tiller handle in drive position min./max. | h14 | mm     | 750 / 1150      |
|                            | 4.19   | Total length                                        | l1  | mm     | 915             |
|                            | 4.21.1 | total width                                         | b1  | mm     | 503             |
|                            | 4.32   | Ground clearance centre of wheelbase                | m2  | mm     | 35              |
|                            | 4.35   | Turning radius                                      | Wa  | mm     | 560             |
| Performance data           | 5.1    | Travel speed laden/unladen                          |     | km/h   | 4.5 / 4.9       |
|                            | 5.5    | Drawbar pull laden/unladen                          |     | N / -  | 200 / -         |
|                            | 5.6    | Max. drawbar pull laden/unladen                     |     | N / -  | 550 / -         |
|                            | 5.10   | Service brake                                       |     |        | electromagnetic |
| Electric motor/electronics | 6.1    | Drive motor, performance S2 60 min                  |     | kW     | 0.4             |
|                            | 6.4    | Battery voltage/nominal capacity                    |     | V / Ah | 24 / 36         |
|                            | 6.5    | Battery weight                                      |     | kg     | 7.5             |
|                            | 6.6.1  | Energy consumption according to EN cycle            |     | kWh/h  | 0.18            |
|                            | 6.6.2  | CO2 equivalent according to EN ISO 23308            |     | kg/h0  | 0.1             |

|                                                                                                                                                                                                   |      |                                           |        |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------------------------------|--------|------------|
| Other                                                                                                                                                                                             | 8.1  | Type of drive control                     |        | Impulse/DC |
|                                                                                                                                                                                                   | 10.7 | Sound pressure level according to EN12053 | dB (A) | 70         |
| - This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values. |      |                                           |        |            |

The German production facilities in  
Norderstedt, Moosburg and Landsberg are  
certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet European  
safety requirements.



 **JUNGHEINRICH**