




## Mobile robot automated VNA storage

### EKX 5a

Lift height: 11000-13000 mm / Load capacity: 1400-1600 kg

 **JUNGHEINRICH**

EKX 5a

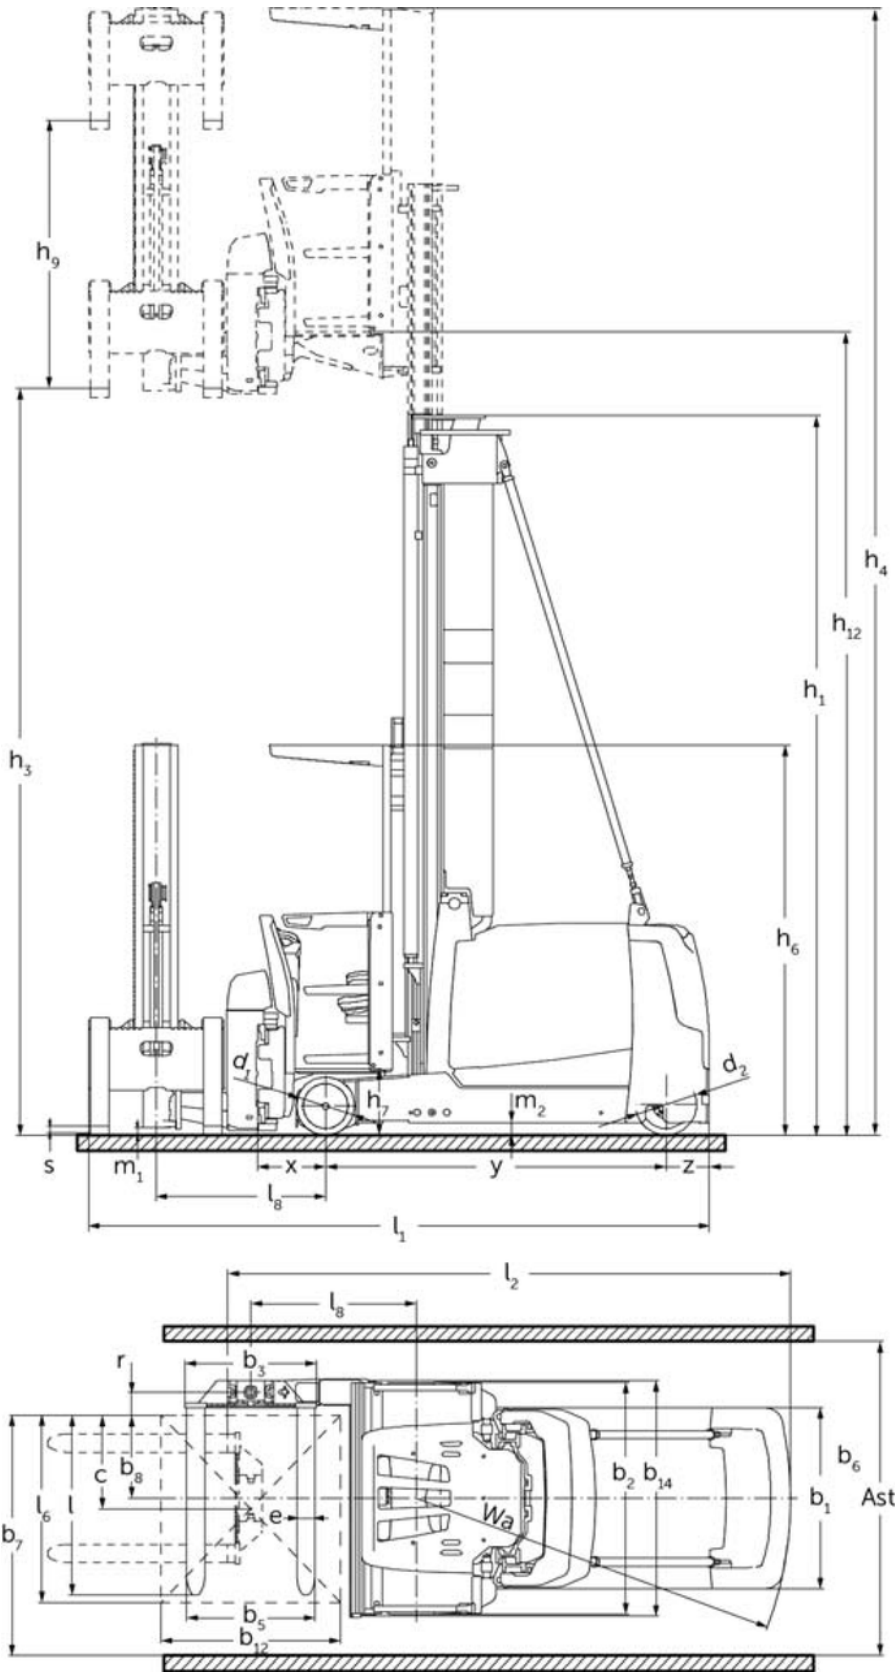







# EKX 5a

| EKX 514a, EKX 516ka, EKX 516a | Lift (h3) | Retracted mast height (h1) | Free lift (h2) | Extended mast height (h4) |
|-------------------------------|-----------|----------------------------|----------------|---------------------------|
| Duplex mast ZT                | 3000 mm   | 2705 mm                    |                | 5550 mm                   |
|                               | 3500 mm   | 2955 mm                    |                | 6050 mm                   |
|                               | 4000 mm   | 3205 mm                    |                | 6550 mm                   |
|                               | 4500 mm   | 3455 mm                    |                | 7050 mm                   |
|                               | 5000 mm   | 3705 mm                    |                | 7550 mm                   |
|                               | 5500 mm   | 3955 mm                    |                | 8050 mm                   |
|                               | 6000 mm   | 4205 mm                    |                | 8550 mm                   |
|                               | 6500 mm   | 4555 mm                    |                | 9050 mm                   |
|                               | 7000 mm   | 4805 mm                    |                | 9550 mm                   |
|                               | 7500 mm   | 5055 mm                    |                | 10050 mm                  |
|                               | 8000 mm   | 5305 mm                    |                | 10550 mm                  |
|                               | 8500 mm   | 5655 mm                    |                | 11050 mm                  |
|                               | 9000 mm   | 5905 mm                    |                | 11550 mm                  |
|                               | 9500 mm   | 6155 mm                    |                | 12050 mm                  |
| Triplex mast DZ               | 4000 mm   | 2550 mm                    |                | 6550 mm                   |
|                               | 4500 mm   | 2710 mm                    | 160 mm         | 7050 mm                   |
|                               | 5000 mm   | 2895 mm                    | 345 mm         | 7550 mm                   |
|                               | 5500 mm   | 3095 mm                    | 545 mm         | 8050 mm                   |
|                               | 6000 mm   | 3295 mm                    | 745 mm         | 8550 mm                   |
|                               | 6500 mm   | 3495 mm                    | 945 mm         | 9050 mm                   |
|                               | 7000 mm   | 3695 mm                    | 1145 mm        | 9550 mm                   |
|                               | 7500 mm   | 3895 mm                    | 1345 mm        | 10050 mm                  |
|                               | 8000 mm   | 4095 mm                    | 1545 mm        | 10550 mm                  |
|                               | 8500 mm   | 4295 mm                    | 1745 mm        | 11050 mm                  |
|                               | 9000 mm   | 4495 mm                    | 1945 mm        | 11550 mm                  |

|                     |           |                            |                |                           |
|---------------------|-----------|----------------------------|----------------|---------------------------|
|                     | 9250 mm   | 4595 mm                    | 2045 mm        | 11800 mm                  |
|                     | 9500 mm   | 4695 mm                    | 2145 mm        | 12050 mm                  |
| EKX 516a            | Lift (h3) | Retracted mast height (h1) | Free lift (h2) | Extended mast height (h4) |
| Triplex mast DZ     | 11000 mm  | 5215 mm                    | 2665 mm        | 13550 mm                  |
|                     | 11500 mm  | 5395 mm                    | 2845 mm        | 14050 mm                  |
|                     | 12000 mm  | 5565 mm                    | 3015 mm        | 14550 mm                  |
|                     | 12500 mm  | 5750 mm                    | 3200 mm        | 15050 mm                  |
|                     | 13000 mm  | 5950 mm                    | 3400 mm        | 15550 mm                  |
|                     | 13500 mm  | 6250 mm                    | 3700 mm        | 16050 mm                  |
|                     | 14000 mm  | 6550 mm                    | 4000 mm        | 16550 mm                  |
|                     | 14500 mm  | 6850 mm                    | 4300 mm        | 17050 mm                  |
| EKX 516ka, EKX 516a | Lift (h3) | Retracted mast height (h1) | Free lift (h2) | Extended mast height (h4) |
| Duplex mast ZT      | 10000 mm  | 6405 mm                    |                | 12550 mm                  |
|                     | 10500 mm  | 6655 mm                    |                | 13050 mm                  |
| Triplex mast DZ     | 10000 mm  | 4875 mm                    | 2325 mm        | 12550 mm                  |
|                     | 10500 mm  | 5045 mm                    | 2495 mm        | 13050 mm                  |

## VDI table

|                  |        |                                             |           |      |                        |             |             |
|------------------|--------|---------------------------------------------|-----------|------|------------------------|-------------|-------------|
| Characteristic   | 1.1    | Manufacturer (abbreviated description)      |           |      | Jungheinrich           |             |             |
|                  | 1.2    | Manufacturer's type designation             |           |      | EKX 514a               | EKX 516ka   | EKX 516a    |
|                  | 1.3    | Drive type                                  |           |      | electric               |             |             |
|                  | 1.4    | Operation                                   |           |      | Automatic              |             |             |
|                  | 1.5    | Load capacity/load                          | Q         | kg   | 1400                   | 1600        |             |
|                  | 1.6    | Load centre distance                        | c         | mm   | 600                    |             |             |
|                  | 1.8    | Load distance, centre of drive axle to fork | x         | mm   | 445                    |             |             |
|                  | 1.9    | Wheelbase                                   | y         | mm   | 1840                   | 1950        | 2220        |
| Weights          | 2.1.1  | Service weight (incl. battery)              |           | kg   | 6350                   | 6750        | 7900        |
|                  | 2.2    | Axle load laden front/rear                  |           | kg   | 5720 / 1880            | 6190 / 2060 | 6590 / 2810 |
|                  | 2.3    | Axle load unladen front/rear                |           | kg   | 3850 / 2500            | 3980 / 2770 | 4480 / 3420 |
| Wheels/chassis   | 3.1    | Tyres                                       |           |      | Bestthane              |             |             |
|                  | 3.2    | Tyre size, front                            |           |      | Ø 380 x 192            |             |             |
|                  | 3.3    | Tyre size, rear                             |           |      | Ø 400 x 160            |             |             |
|                  | 3.5    | Wheels, number front/back (x=driven)        |           |      | 2 / 1x                 |             |             |
|                  | 3.6    | Tread width, front                          | b10       | mm   | 1258                   |             |             |
| Basic dimensions | 4.2    | Retracted mast height (h1)                  | h1        | mm   | 2955                   |             |             |
|                  | 4.4    | Lift (h3)                                   | h3        | mm   | 3500                   |             |             |
|                  | 4.5    | Extended mast height (h4)                   | h4        | mm   | 6050                   |             |             |
|                  | 4.8    | Seat height/stand height                    | h7        | mm   | 430                    |             |             |
|                  | 4.19   | Total length                                | l1        | mm   | 3665                   | 3775        | 4045        |
|                  | 4.20   | Length including fork shank                 | l2        | mm   | 3379                   | 3489        | 3759        |
|                  | 4.21.1 | total width                                 | b1        | mm   | 1210                   |             |             |
|                  | 4.21.2 | total width                                 | b2        | mm   | 1450                   |             |             |
|                  | 4.22   | Fork dimensions                             | s/e/<br>l | mm   | 50 x 120 x 1200        |             |             |
|                  | 4.25   | Width across forks                          | b5        | mm   | 560                    |             |             |
|                  | 4.31   | Ground clearance laden under mast           | m1        | mm   | 80                     |             |             |
|                  | 4.32   | Ground clearance centre of wheelbase        | m2        | mm   | 80                     |             |             |
| Performance data | 5.1    | Travel speed laden/unladen                  |           | km/h | 10.5 / 10.5            | 12 / 12     |             |
|                  | 5.10   | Service brake                               |           |      | regenerative           |             |             |
|                  | 5.11   | Parking brake                               |           |      | Electric sprung-loaded |             |             |

|                            |       |                                           |        |                           |           |           |
|----------------------------|-------|-------------------------------------------|--------|---------------------------|-----------|-----------|
| Electric motor/electronics | 6.1   | Drive motor, performance S2 60 min        | kW     | 9                         |           |           |
|                            | 6.2   | Lift motor, performance with S3           | kW     | 25                        |           |           |
|                            | 6.3   | Battery according to DIN 43531/35/36      |        | 3 PzS 465                 | 4 PzS 620 | 6 PzS 930 |
|                            | 6.4   | Battery voltage/nominal capacity          | V / Ah | 80 / 465                  | 80 / 620  | 80 / 930  |
|                            | 6.5   | Battery weight                            | kg     | 1238                      | 1558      | 2178      |
|                            | 6.6   | Energy consumption according to VDI cycle | kWh/h  | 0                         |           |           |
|                            | 6.6.1 | Energy consumption according to EN cycle  | kWh/h  | 4.94                      |           |           |
|                            | 6.6.2 | CO2 equivalent according to EN ISO 23308  | kg/h0  | 2.6                       |           |           |
| Other                      | 8.1   | Type of drive control                     |        | AC synchronous reluctance |           |           |
|                            | 10.5  | Steering version                          |        | electric                  |           |           |
|                            | 10.7  | Sound pressure level according to EN12053 | dB (A) | 64                        |           |           |

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Jungheinrich

Lift Truck Corp.

2121 West Sam Houston Pkwy. N.  
Houston, TX 77043-2305

The German production facilities in  
Norderstedt, Moosburg and Landsberg are  
certified as well as our Genuine Parts  
Center in Kaltenkirchen.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet European  
safety requirements.



The Jungheinrich logo, featuring a red upward-pointing arrow above the word 'JUNGHEINRICH' in a bold, black, sans-serif font.