




Electric tow tractor

EZS C40

Towing capacity: 4000 kg



EZS C40

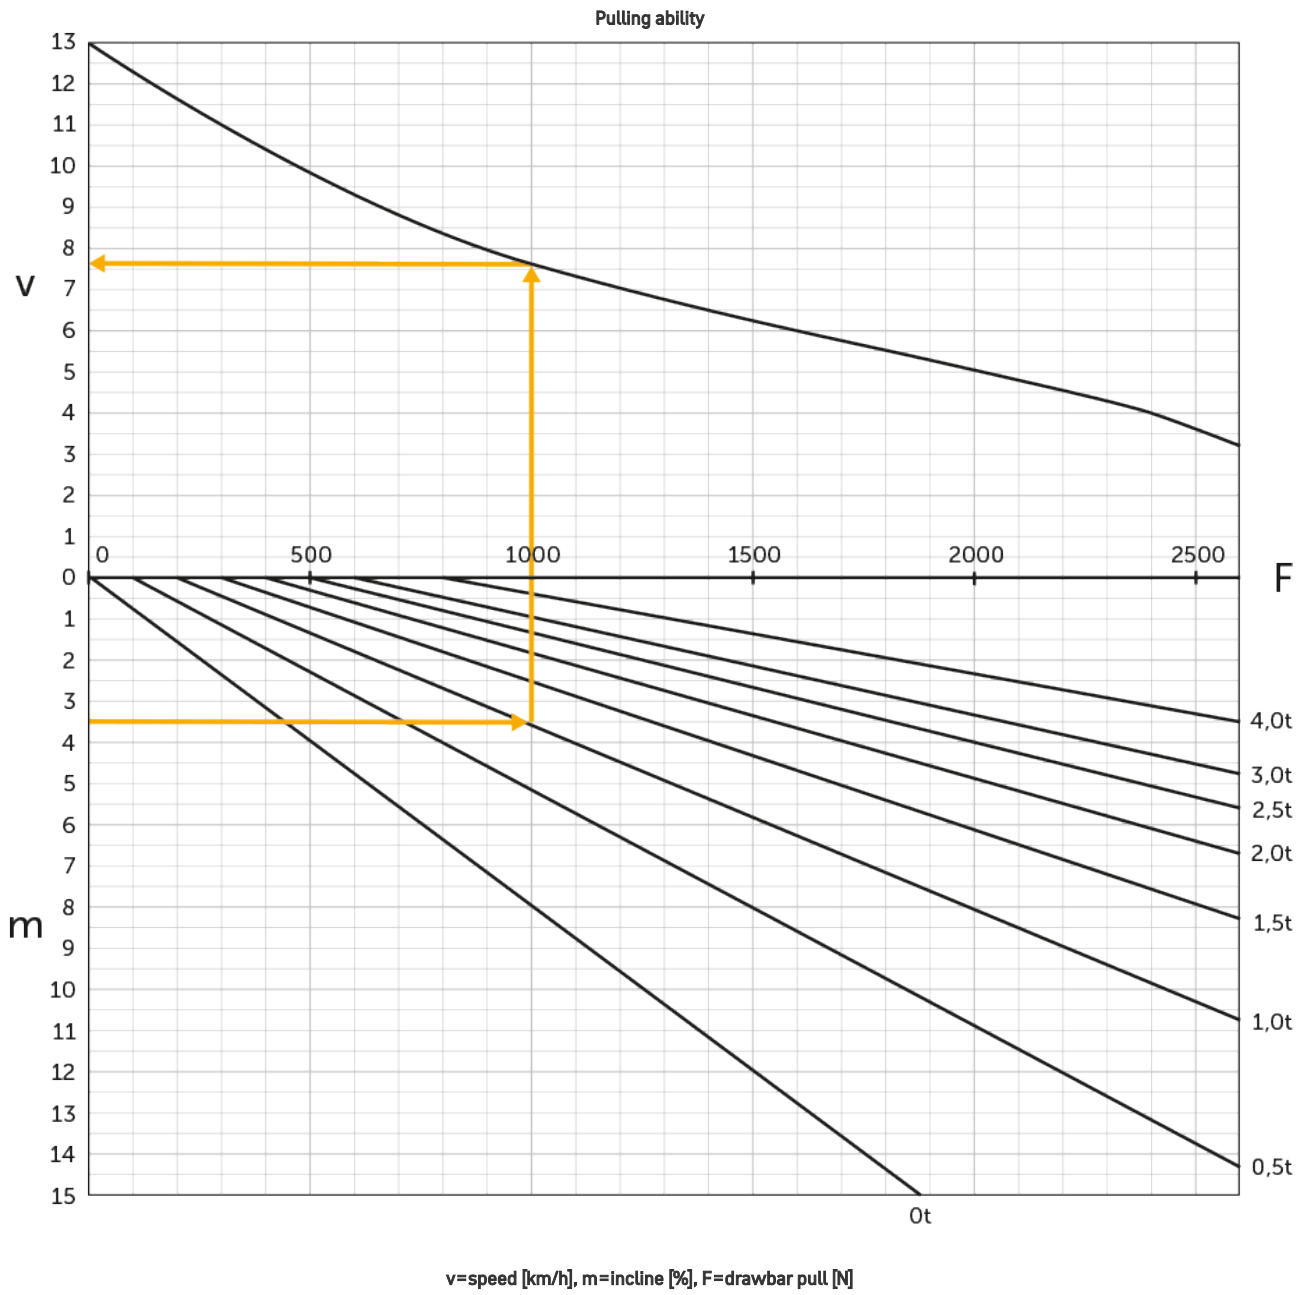



VDI table

| | | | | | |
|----------------------------|--------|---|-----|--------|--------------------|
| Characteristic | 1.1 | Manufacturer (abbreviated description) | | | Jungheinrich |
| | 1.2 | Manufacturer's type designation | | | EZS C40 |
| | 1.3 | Drive type | | | electric |
| | 1.4 | Operation | | | Stand-on |
| | 1.5.3 | Towing capacity | Q | kg | 4000 |
| | 1.7 | Rated drawbar pull | | N | 800 |
| | 1.9 | Wheelbase | y | mm | 1229 |
| Weights | 2.1.1 | Service weight (incl. battery) | | kg | 1185 |
| | 2.3 | Axle load unladen front/rear | | kg | 660 / 525 |
| Wheels/chassis | 3.1 | Tyres | | | Super-elastic (SE) |
| | 3.2 | Tyre size, front | | | Ø 310 x 105 |
| | 3.3 | Tyre size, rear | | | Ø 301 x 85 |
| | 3.5 | Wheels, number front/back (x=driven) | | | 1x / 2 |
| | 3.7 | Tread width, rear | b11 | mm | 680 |
| Basic dimensions | 4.8 | Seat height/stand height | h7 | mm | 182 |
| | 4.9 | Height of tiller handle in drive position min./max. | h14 | mm | 1410 |
| | 4.12 | Coupling height | h10 | mm | 158 |
| | 4.19 | Total length | l1 | mm | 1659 |
| | 4.21.1 | total width | b1 | mm | 810 |
| | 4.32 | Ground clearance centre of wheelbase | m2 | mm | 100 |
| | 4.35 | Turning radius | Wa | mm | 1487 |
| Performance data | 5.1 | Travel speed laden/unladen | | km/h | 8 / 12.5 |
| | 5.1.1 | Reverse travel speed with/without load | | km/h | 6 / 6 |
| | 5.5 | Drawbar pull laden/unladen | | N | 800 / 800 |
| | 5.6 | Max. drawbar pull laden/unladen | | N | 2600 / 2600 |
| | 5.10 | Service brake | | | generative |
| Electric motor/electronics | 6.1 | Drive motor, performance S2 60 min | | kW | 2.8 |
| | 6.4 | Battery voltage/nominal capacity | | V / Ah | 24 / 620 |
| | 6.5 | Battery weight | | kg | 470 |
| | 6.6.1 | Energy consumption according to EN cycle | | kWh/h | 1.13 |
| | 6.6.2 | CO2 equivalent according to EN ISO 23308 | | kg/h0 | 0.6 |

| | | | | |
|---|------|---|--------|-------------------|
| Other | 8.1 | Type of drive control | | AC speedCONTROL |
| | 10.5 | Steering version | | Electric steering |
| | 10.7 | Sound pressure level according to EN12053 | dB (A) | 66 |
| - This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values. | | | | |

- VDI no. 4.9: the height applies to the jetPILOT
- VDI no. 4.12: the value for the coupling height applies to a single plug-in coupling. Other coupling heights are available
- VDI no. 4.19: as different coupling systems are available, the specification applies to the overall length including a single plug-in coupling
- VDI no. 5.1: see tow load diagram
- VDI no. 5.5: this value is the rated drawbar pull
- VDI no. 5.6: see tow load diagram

The German production facilities in
Norderstedt, Moosburg and Landsberg are
certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European
safety requirements.



 **JUNGHEINRICH**

The logo features a red upward-pointing arrow integrated into the letter 'J' of the word 'JUNGHEINRICH', which is written in a bold, black, sans-serif font.