





Electric pedestrian pallet truck


ERE 120i/125i

Lift height: 122 mm / Load capacity: 2000-2500 kg



ERE 120i/125i

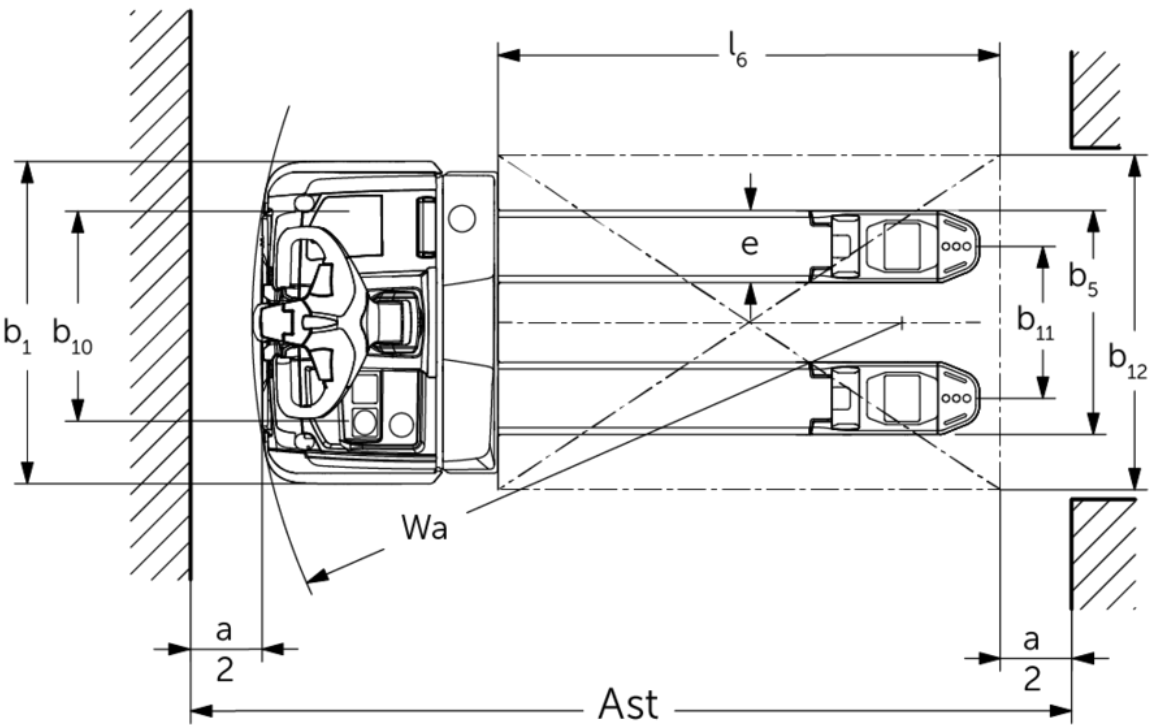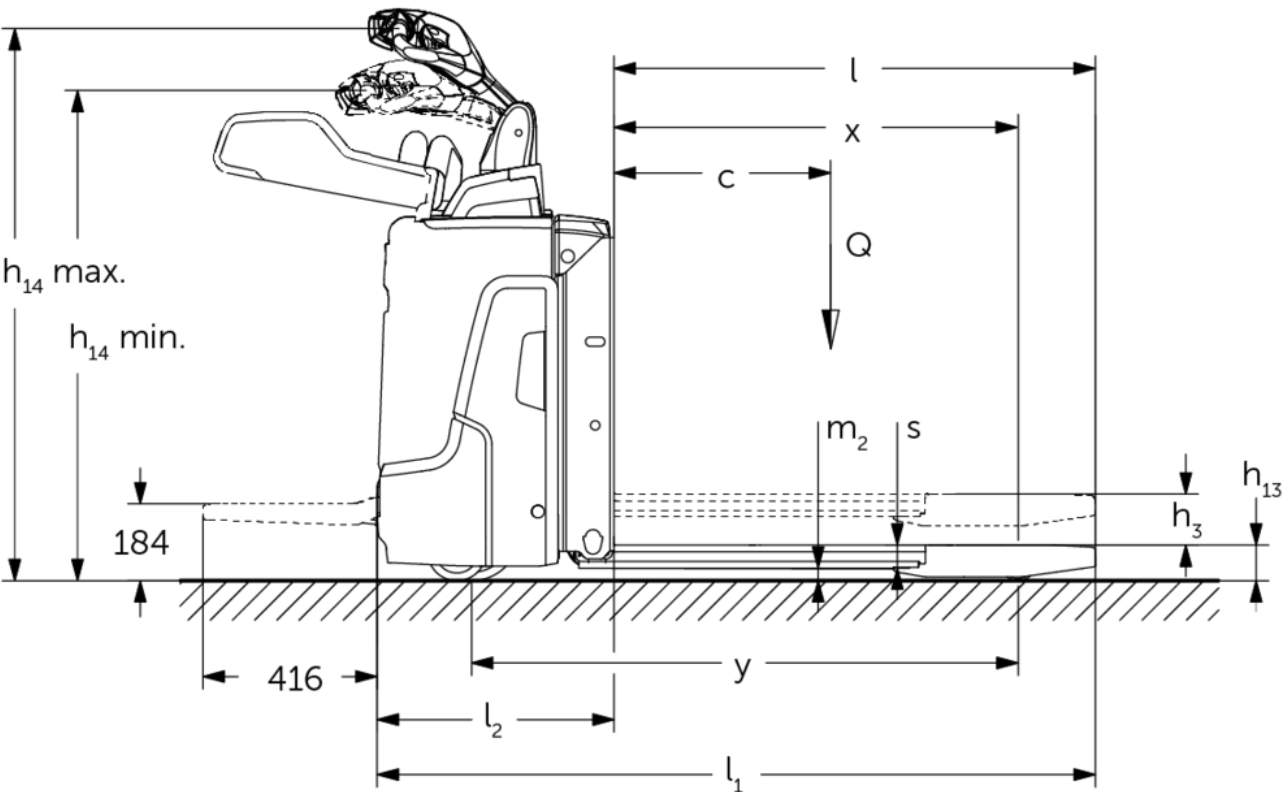

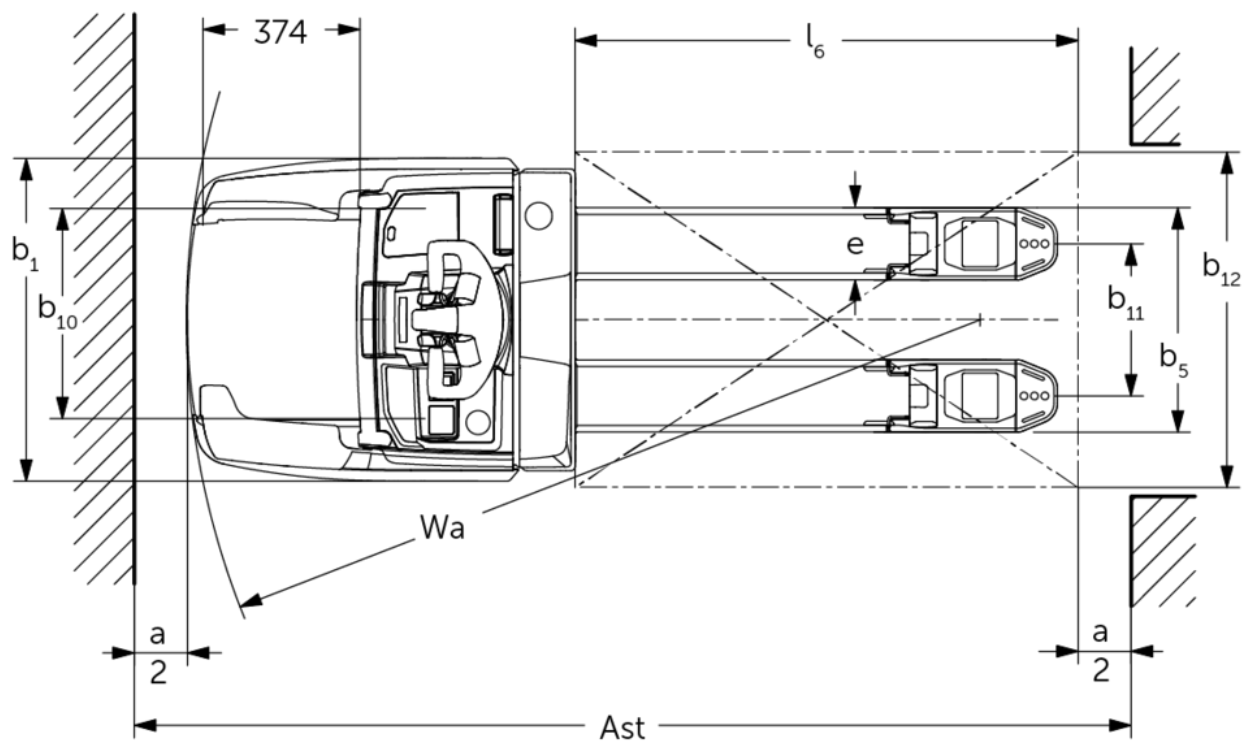



VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich		
	1.2	Manufacturer's type designation		ERE 120i 6 km/h	ERE 120i	ERE 125i
	1.3	Drive type		electric		
	1.4	Operation		Tiller		
	1.5	Load capacity/load	Q kg	2000		2500
	1.6	Load centre distance	c mm		600	
	1.8	Load distance, centre of drive axle to fork	x mm		897	
	1.9	Wheelbase	y mm		1237	
Weights	2.1.1	Service weight (incl. battery)	kg	513	543	560
	2.2	Axle load laden front/rear	kg	1627 / 874	1621 / 929	1909 / 1155
	2.3	Axle load unladen front/rear	kg	112 / 401	132 / 411	137 / 423
Wheels/chassis	3.1	Tyres		Polyurethane (PU)		
	3.2	Tyre size, front		Ø 230 x 65		Ø 230 x 77
	3.3	Tyre size, rear		Ø 85 x 110 / Ø 85 x 85		
	3.4	Additional wheels		Ø 140 x 57		
	3.5	Wheels, number front/back (x=driven)		1x +2/2 oder 4		
	3.6	Tread width, front	b10 mm		363	
	3.7	Tread width, rear	b11 mm		512	
Basic dimensions	4.4	Lift (h3)	h3 mm		122	
	4.9	Height of tiller handle in drive position min./max.	h14 mm		1137 / 1419	
	4.15	Height, lowered	h13 mm		85	
	4.19	Total length	l1 mm		1716	
	4.20	Length including fork shank	l2 mm		566	
	4.21.1	total width	b1 mm		770	
	4.22	Fork dimensions	s/e/ l mm		55 x 172 x 1150	
	4.25	Width across forks	b5 mm		535	
	4.32	Ground clearance centre of wheelbase	m2 mm		30	
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast mm		2298	
	4.34.2	Aisle width (pallet 800×1200 length)	Ast mm		2191	
	4.35	Turning radius	Wa mm		1489	
Performance data	5.1	Travel speed laden/unladen	km/h	6 / 6	8 / 9	9 / 9
	5.2	Lift speed laden/unladen	m/s	0.04 / 0.05		0.06 / 0.08
	5.3	Lowering speed laden/unladen	m/s	0.06 / 0.05		0.07 / 0.05
	5.8	Max. gradeability laden/unladen	%	8 / 16		
	5.10	Service brake		generative		

Electric motor/electronics	6.1	Drive motor, performance S2 60 min	kW	2		2.8
	6.2	Lift motor, performance with S3	kW	1.2		2.2
	6.4	Battery voltage/nominal capacity	V / Ah	25.6 / 100		
	6.5	Battery weight	kg	35		
	6.6.1	Energy consumption according to EN cycle	kWh/h	0.41		0.36
	6.6.2	CO2 equivalent according to EN ISO 23308	kg/h0	0.22		0.19
	6.7	Throughput	t/h	108	136	195
Other	8.1	Type of drive control		AC		
	10.7	Sound pressure level according to EN12053	dB (A)	61		65
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.						

The values in the table apply to the folding stand-on platform (folded up), XS battery compartment, fork length 1,150 mm, raised support arm lift.

- VDI no. 1.8: lowered load section: $x + 67$ mm.
- VDI no. 1.9: lowered load section: $y + 67$ mm. With S battery compartment: $y + 50$ mm.
- VDI no. 4.19: with S battery compartment: $l1 + 50$ mm; with folding platform folded down: $l1 + 416$ mm; compact, fixed platform: $l1 + 358$ mm; extended, fixed platform: $l1 + 472$ mm.
- VDI no. 4.20: with S battery compartment: $l2 + 50$ mm; with folding platform folded down: $l2 + 416$ mm; compact, fixed platform: $l2 + 358$ mm; extended, fixed platform: $l2 + 472$ mm.
- VDI no. 4.34.1: lowered load section: aisle width + 60 mm; with folding platform folded down: aisle width + 416 mm; compact, fixed platform: aisle width + 365 mm; extended, fixed platform: aisle width + 479 mm.
- VDI no. 4.34.2: lowered load section: aisle width + 30 mm; with folding platform folded down: aisle width + 416 mm; compact, fixed platform: aisle width + 365 mm; extended, fixed platform: aisle width + 479 mm.
- VDI no. 4.35: lowered load section: $Wa + 67$ mm.
with S battery compartment: $Wa + 50$ mm; with folding platform folded down: $Wa + 416$ mm; compact, fixed platform: $Wa + 365$ mm; extended, fixed platform: $Wa + 479$ mm.
- VDI no. 6.2: lift motor, performance with S3 = 5%.
- VDI no. 6.6: energy consumption according to EN 16796 with mechanical steering; with electric steering = 0.43 kWh/h.
- VDI no. 6.7: throughput according to VDI 2198 with mechanical steering; with electric steering = 144 t/h.

The German production facilities in
Norderstedt, Moosburg and Landsberg are
certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European
safety requirements.



 **JUNGHEINRICH**