




Hand pallet truck

AM 20

Lift height: 85-205 mm / Load capacity: 2000 kg

JUNGHEINRICH

AM 20

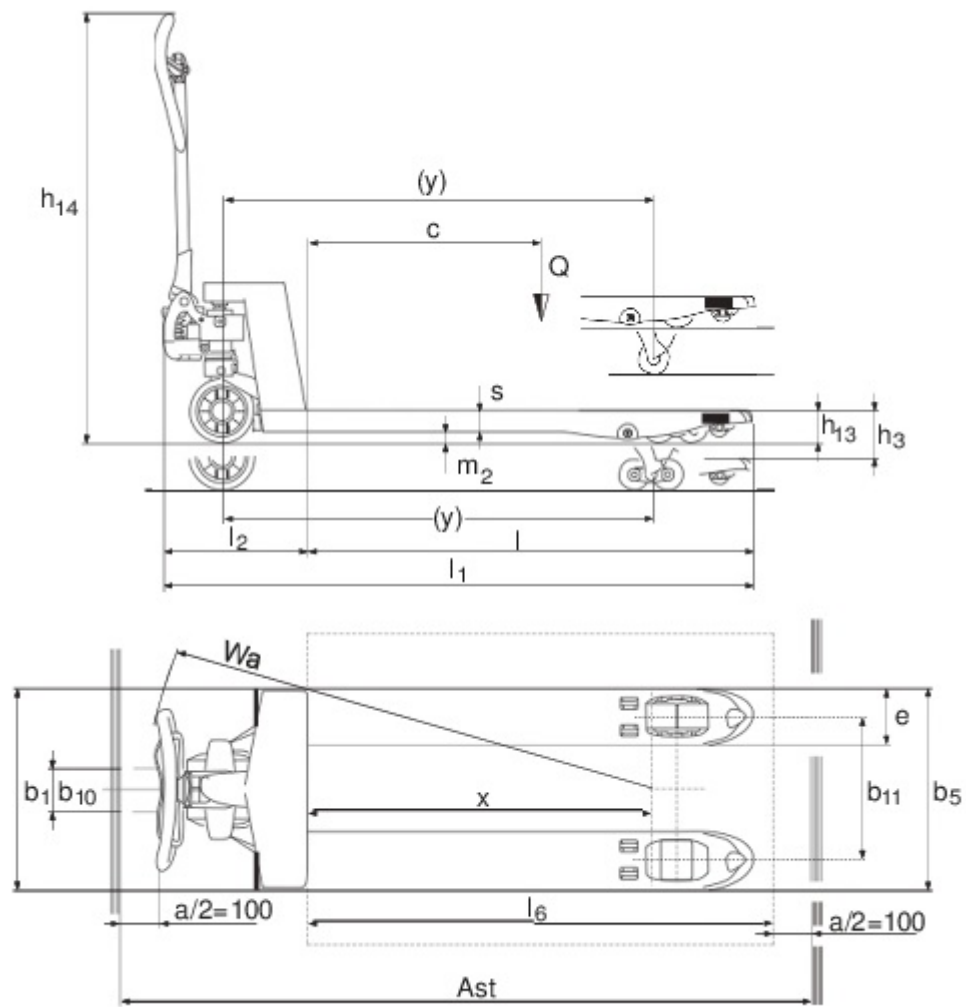

Characteristic	1.1	Manufacturer (abbreviated description)		Other (OEM)						
	1.2	Manufacturer's type designation		AM 20						
	1.3	Drive type		Manual						
	1.4	Operation		Manual						
	1.5	Load capacity/load	Q	kg	2000					
	1.6	Load centre distance	c	mm	600					
	1.9	Wheelbase	y	mm	1120					
Weights	2.1	Netto weight		kg	70	71	70	71	70	71
	2.2	Axle load laden front/rear		kg	549 / 1521					
	2.3	Axle load unladen front/rear		kg	46 / 24					
Wheels/chassis	3.1	Tyres			C-GV	C-BV	V-GV	V-BV	N-GN	N-BN
	3.2	Tyre size, front			Ø 200 x 50					
	3.3	Tyre size, rear			Ø 82 x 93	Ø 82 x 70	Ø 82 x 93	Ø 82 x 70	Ø 82 x 93	Ø 82 x 70
	3.5	Wheels, number front/back (x=driven)			2/2	2/4	2/2	2/4	2/2	2/4
	3.6	Tread width, front	b10	mm	130					
	3.7	Tread width, rear	b11	mm	380					
Basic dimensions	4.4	Lift (h3)	h3	mm	115					
	4.9	Height of tiller handle in drive position min./max.	h14	mm	355 / 1230					
	4.14	Stand height, elevated	h12	mm	200					
	4.15	Height, lowered	h13	mm	85					
	4.19	Total length	l1	mm	1540					
	4.20	Length including fork shank	l2	mm	390					
	4.21.1	total width	b1	mm	540					
	4.22	Fork dimensions	s/ e/l	mm	48 x 160 x 1150					
	4.25	Width across forks	b5	mm	540					
	4.32	Ground clearance centre of wheelbase	m2	mm	37					
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1743					
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1793					
4.35	Turning radius	Wa	mm	1275						
Performance data										
	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.06					

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in
Norderstedt, Moosburg and Landsberg are
certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European
safety requirements.



 **JUNGHEINRICH**