





Scissor lift hand pallet truck

AMX 10/10e



Lift height: 714 mm / Load capacity: 1000 kg

JUNGHEINRICH

AMX 10/10e

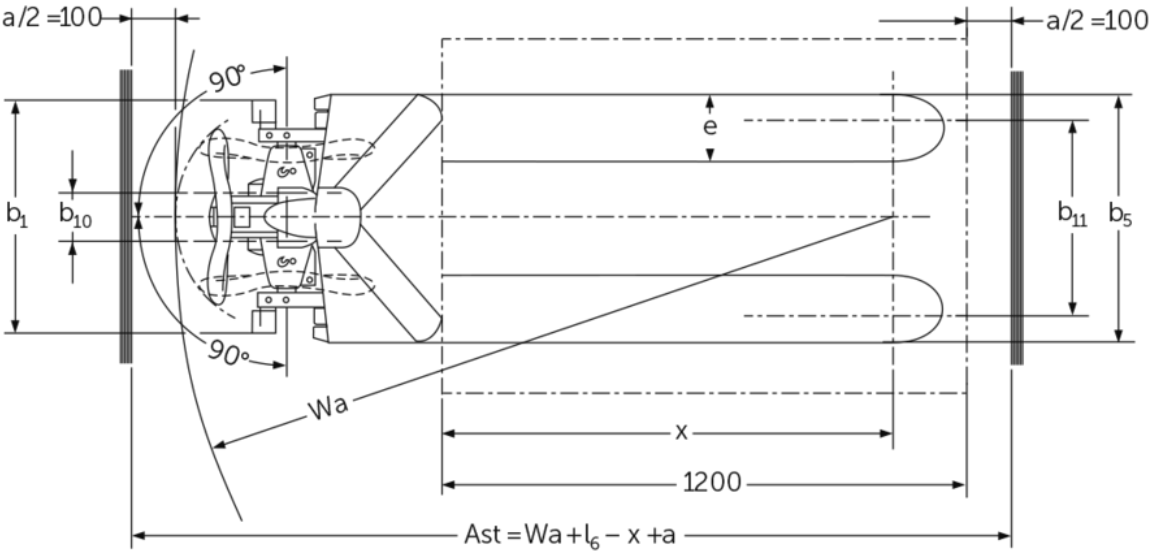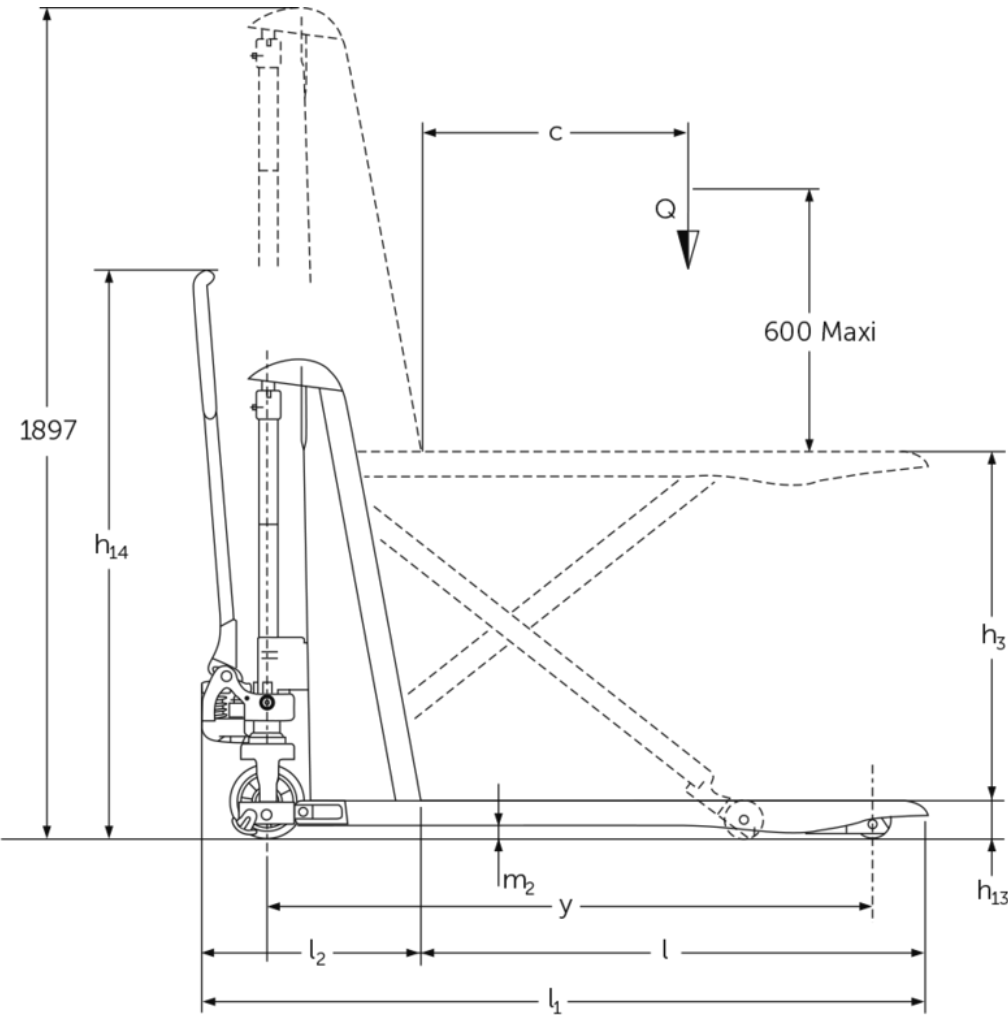

AMX I15 / I15p

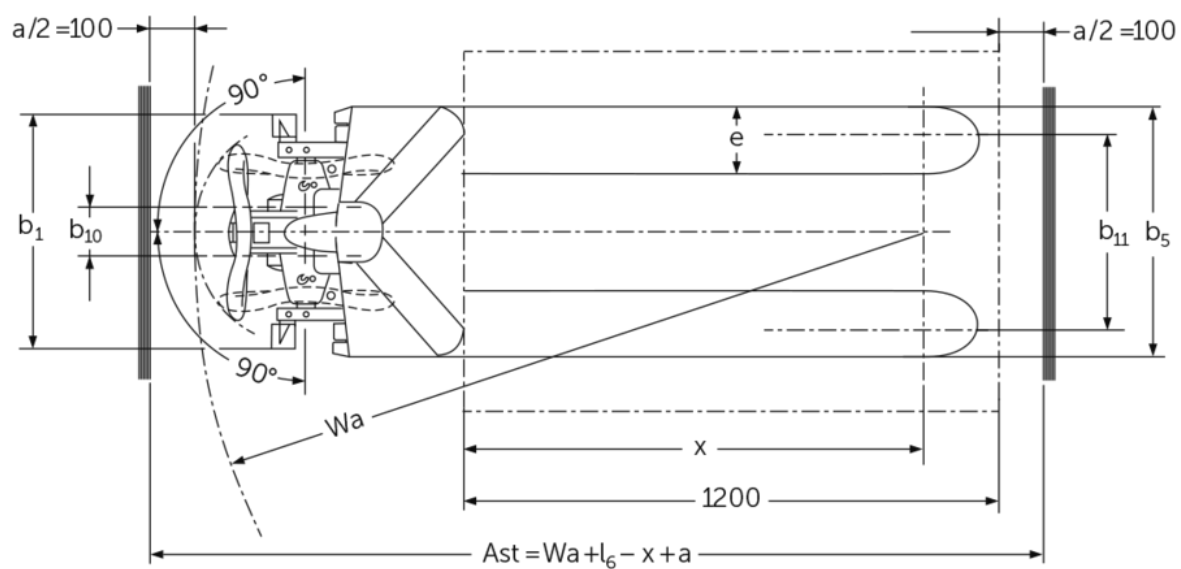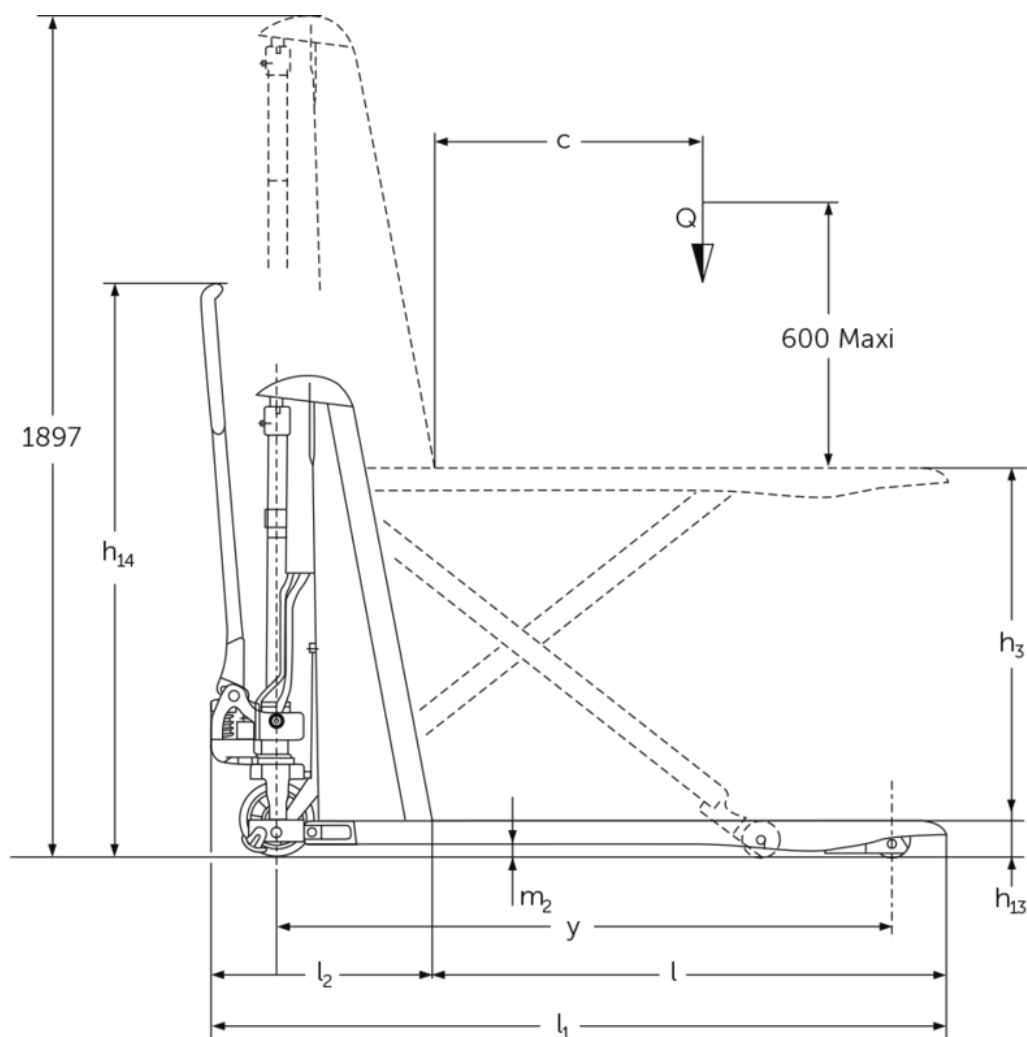

AMX I15e / I15ep

VDI table

(AMX 10)

Characteristic	1.1	Manufacturer (abbreviated description)		Other (OEM)					
	1.2	Manufacturer's type designation		AMX 10					
	1.3	Drive type		Manual					
	1.4	Operation		Manual					
	1.5	Load capacity/load	Q kg	1000					
	1.6	Load centre distance	c mm	600					
	1.9	Wheelbase	y mm	1383					
Weights	2.1	Netto weight	kg	157					
	2.2	Axle load laden front/rear	kg	406 / 751					
	2.3	Axle load unladen front/rear	kg	101 / 56					
Wheels/chassis	3.1	Tyres		V-GV	C-GN	N-GN	V-GV	C-GN	N-GN
	3.2	Tyre size, front		Ø 170 x 50					
	3.3	Tyre size, rear		Ø 82 x 62					
	3.5	Wheels, number front/back (x=driven)		2/2					
	3.6	Tread width, front	b10 mm	109					
	3.7	Tread width, rear	b11 mm	440					
Basic dimensions	4.4	Lift (h3)	h3 mm	714					
	4.5	Extended mast height (h4)	h4 mm	1897					
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1299					
	4.15	Height, lowered	h13 mm	86					
	4.19	Total length	l1 mm	1650					
	4.20	Length including fork shank	l2 mm	500					
	4.21.1	total width	b1 mm	560			680		
	4.22	Fork dimensions	s/ e/l mm	53 x 150 x 1150					
	4.25	Width across forks	b5 mm	560			680		
	4.32	Ground clearance centre of wheelbase	m2 mm	30					
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	2005					
	4.35	Turning radius	Wa mm	1635					
Performance data									
	5.3	Lowering speed laden/unladen	m/s	0.11 / 0.04					

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

(AMX 10e)

Characteristic	1.1	Manufacturer (abbreviated description)		Other (OEM)					
	1.2	Manufacturer's type designation		AMX 10e					
	1.3	Drive type		electric					
	1.4	Operation		Manual					
	1.5	Load capacity/load	Q kg	1000					
	1.6	Load centre distance	c mm	600					
	1.9	Wheelbase	y mm	1383					
Weights	2.1	Netto weight	kg	195					
	2.2	Axle load laden front/rear	kg	443 / 752					
	2.3	Axle load unladen front/rear	kg	136 / 59					
Wheels/chassis	3.1	Tyres		V-GV	C-GN	N-GN	V-GV	C-GN	N-GN
	3.2	Tyre size, front		Ø 170 x 50					
	3.3	Tyre size, rear		Ø 82 x 62					
	3.5	Wheels, number front/back (x=driven)		2/2					
	3.6	Tread width, front	b10 mm	109					
	3.7	Tread width, rear	b11 mm	440					
Basic dimensions	4.4	Lift (h3)	h3 mm	714					
	4.5	Extended mast height (h4)	h4 mm	1897					
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1299					
	4.15	Height, lowered	h13 mm	86					
	4.19	Total length	l1 mm	1650					
	4.20	Length including fork shank	l2 mm	500					
	4.21.1	total width	b1 mm	560		680			
	4.22	Fork dimensions	s/ e/l mm	53 x 150 x 1150					
	4.25	Width across forks	b5 mm	560		680			
	4.32	Ground clearance centre of wheelbase	m2 mm	30					
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	2005					
	4.35	Turning radius	Wa mm	1635					
	Performance data	5.2	Lift speed laden/unladen	m/s	0.03 / 0.05				
5.3		Lowering speed laden/unladen	m/s	0.13 / 0.05					

Electric motor/electronics	6.2	Lift motor, performance with S3	kW	0.5
	6.4	Battery voltage/nominal capacity	V / Ah	12 / 70
	6.5	Battery weight	kg	24
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

The German production facilities in
Norderstedt, Moosburg and Landsberg are
certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European
safety requirements.



 **JUNGHEINRICH**