


Hand pallet truck

AM 30

Lift height: 120 mm / Load capacity: 3000 kg

JUNGHEINRICH

AM 30

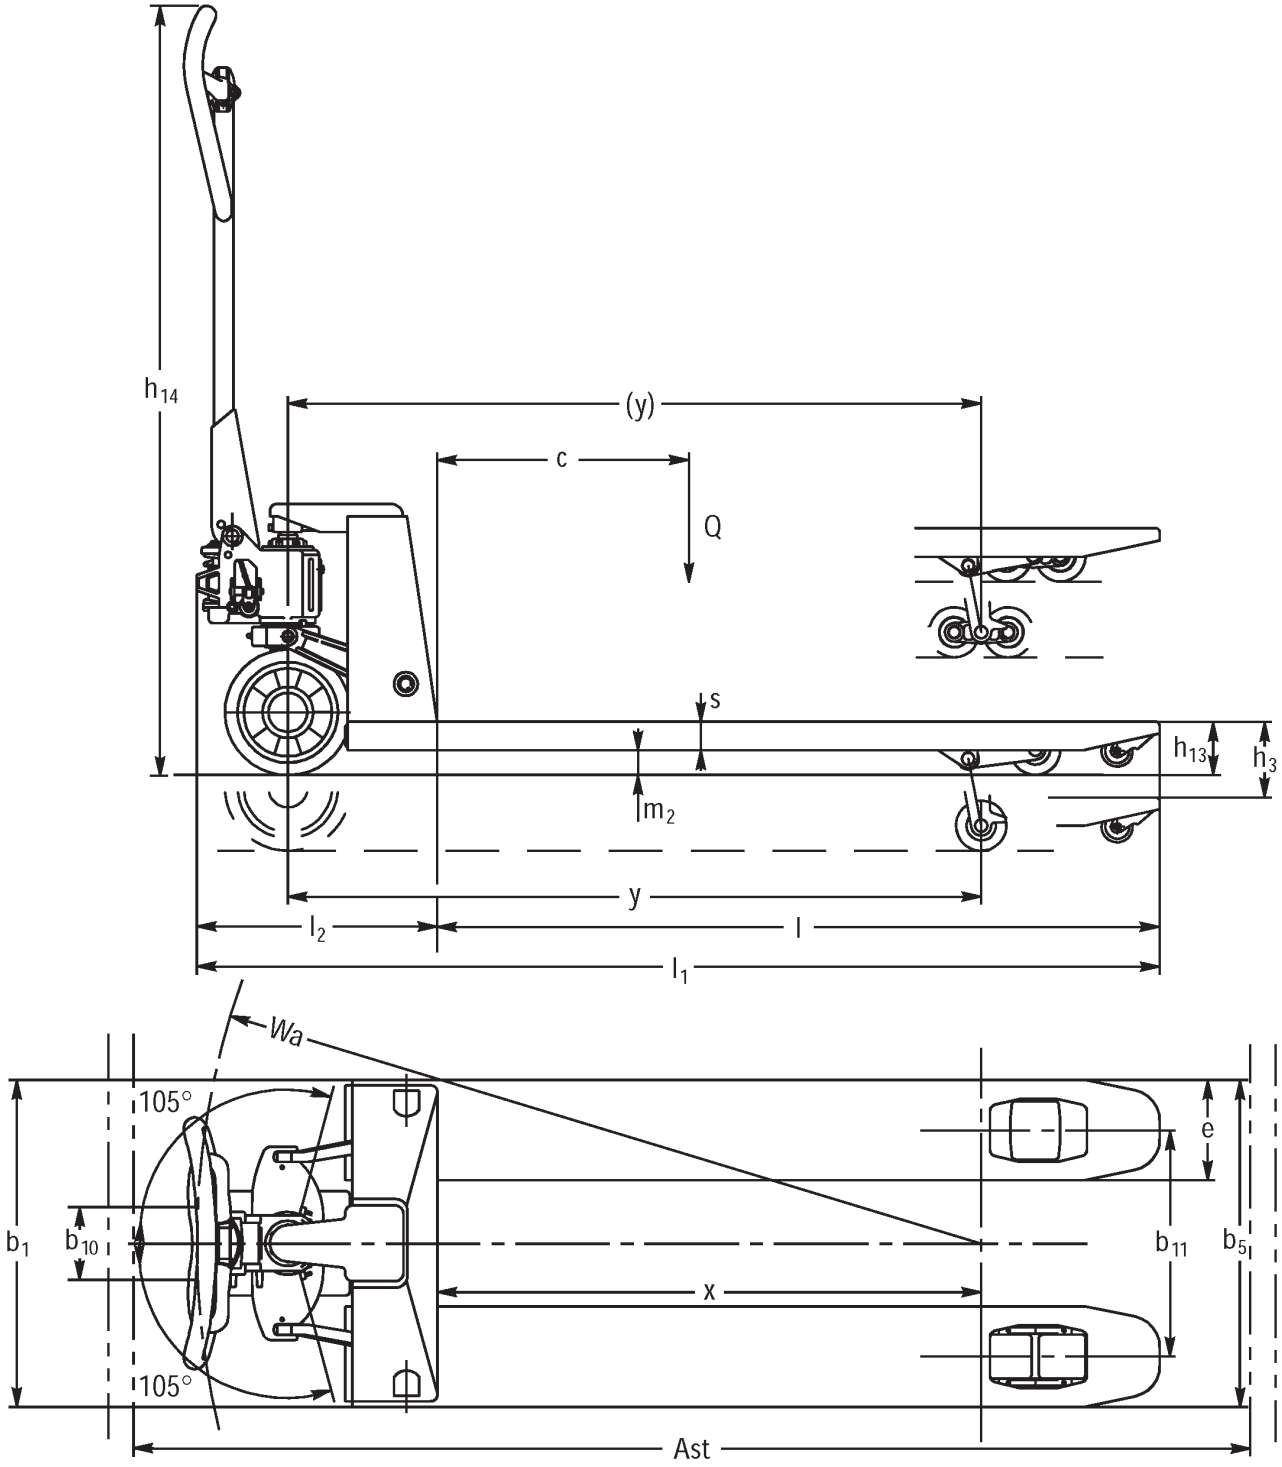

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)			
	1.2	Manufacturer's type designation			AM 30			
	1.3	Drive type			Manual			
	1.4	Operation			Manual			
	1.5	Load capacity/load	Q	kg	3000			
	1.6	Load centre distance	c	mm	600	800	900	1050
	1.9	Wheelbase	y	mm	1174	-		2054
Weights	2.1	Netto weight		kg	86	124	126	142
	2.2	Axle load laden front/rear		kg	815 / 2270	- / -		1135 / 2007
	2.3	Axle load unladen front/rear		kg	28 / 58	- / -		57 / 85
Wheels/chassis	3.1	Tyres			V-BV			
	3.2	Tyre size, front			Ø 200 x 50			
	3.3	Tyre size, rear			Ø 80 x 70			
	3.5	Wheels, number front/back (x=driven)			2/4	2 / 4		2/4
	3.6	Tread width, front	b10	mm	116			
	3.7	Tread width, rear	b11	mm	390			
Basic dimensions	4.4	Lift (h3)	h3	mm	120			
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1224			
	4.14	Stand height, elevated	h12	mm	205			
	4.15	Height, lowered	h13	mm	85			
	4.19	Total length	l1	mm	1603	1983	2183	2483
	4.20	Length including fork shank	l2	mm	383			
	4.21.1	total width	b1	mm	550			
	4.22	Fork dimensions	s/e/l	mm	45 x 160 x 1220	63 x 160 x 1600	63 x 160 x 1800	63 x 160 x 2100
	4.25	Width across forks	b5	mm	550			
	4.32	Ground clearance centre of wheelbase	m2	mm	36	-		36
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1803	-		2683
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1803	-		2683
	4.35	Turning radius	Wa	mm	1319	-		2184
Performance data	5.3	Lowering speed laden/unladen		m/s	0.09 / 0.05			

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in Norderstedt, Moosburg and Landsberg are certified as well as our Genuine Parts Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.

CE

JUNGHEINRICH