


Scissor lift hand pallet truck


AMX 10/10e

Lift height: 714 mm / Load capacity: 1000 kg


JUNGHEINRICH


AMX 10/10e

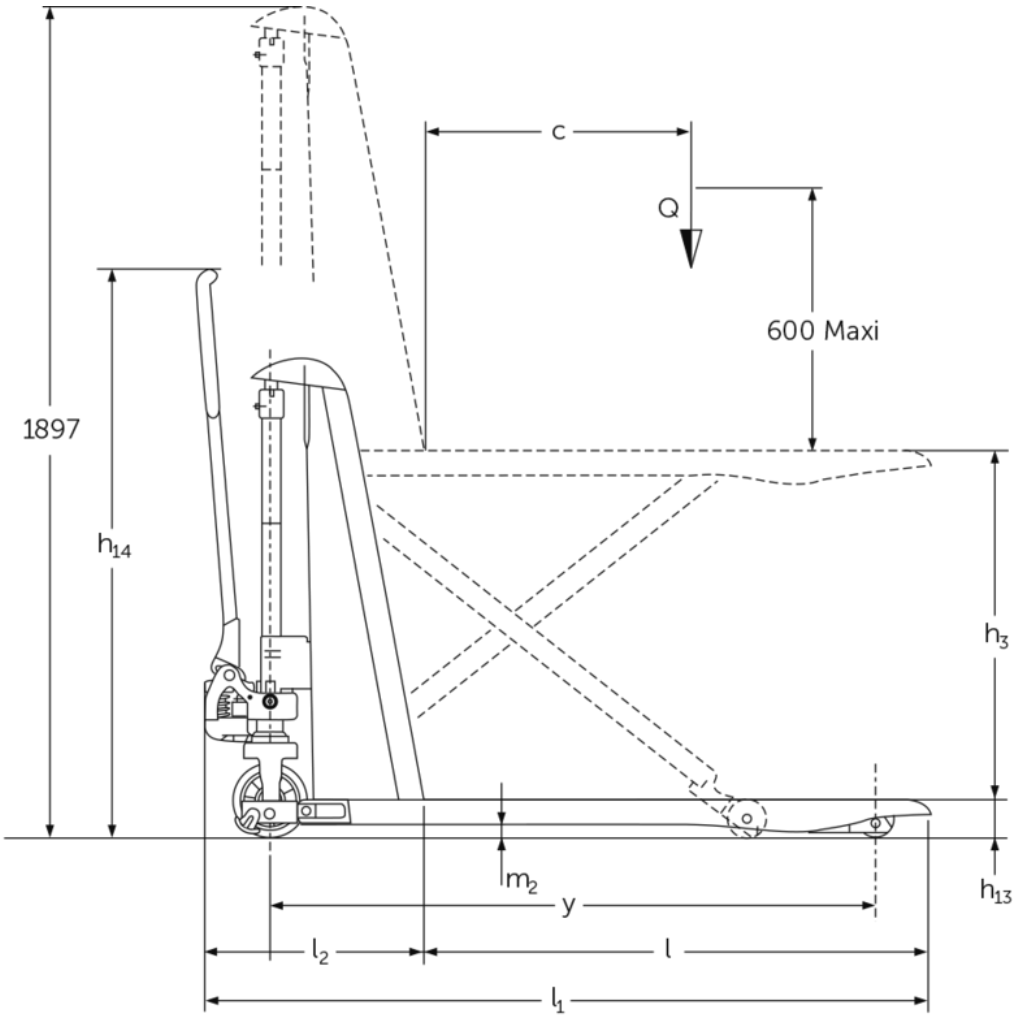

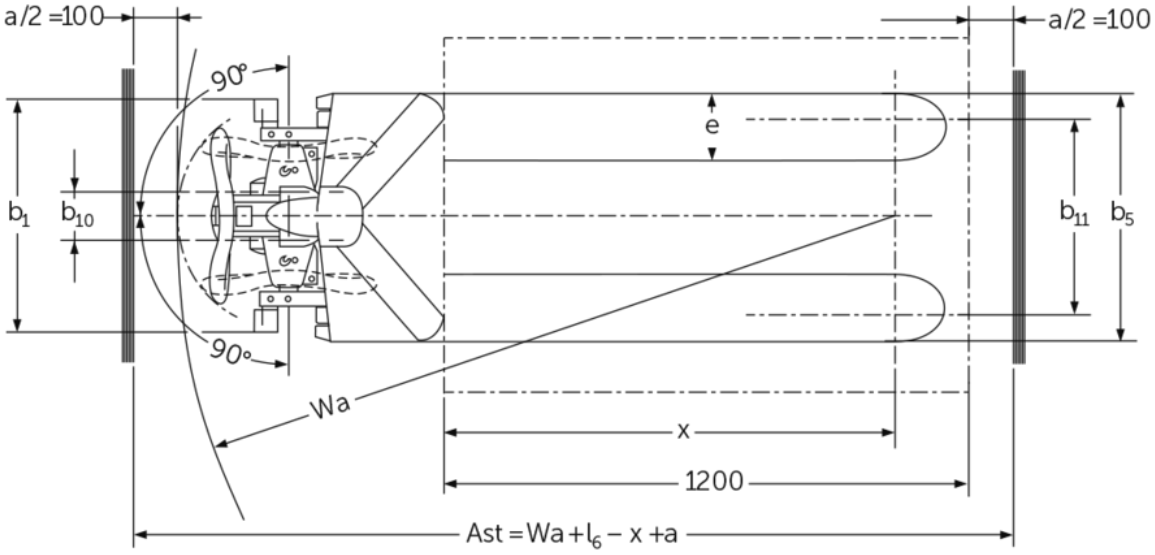

AMX I15 / I15p

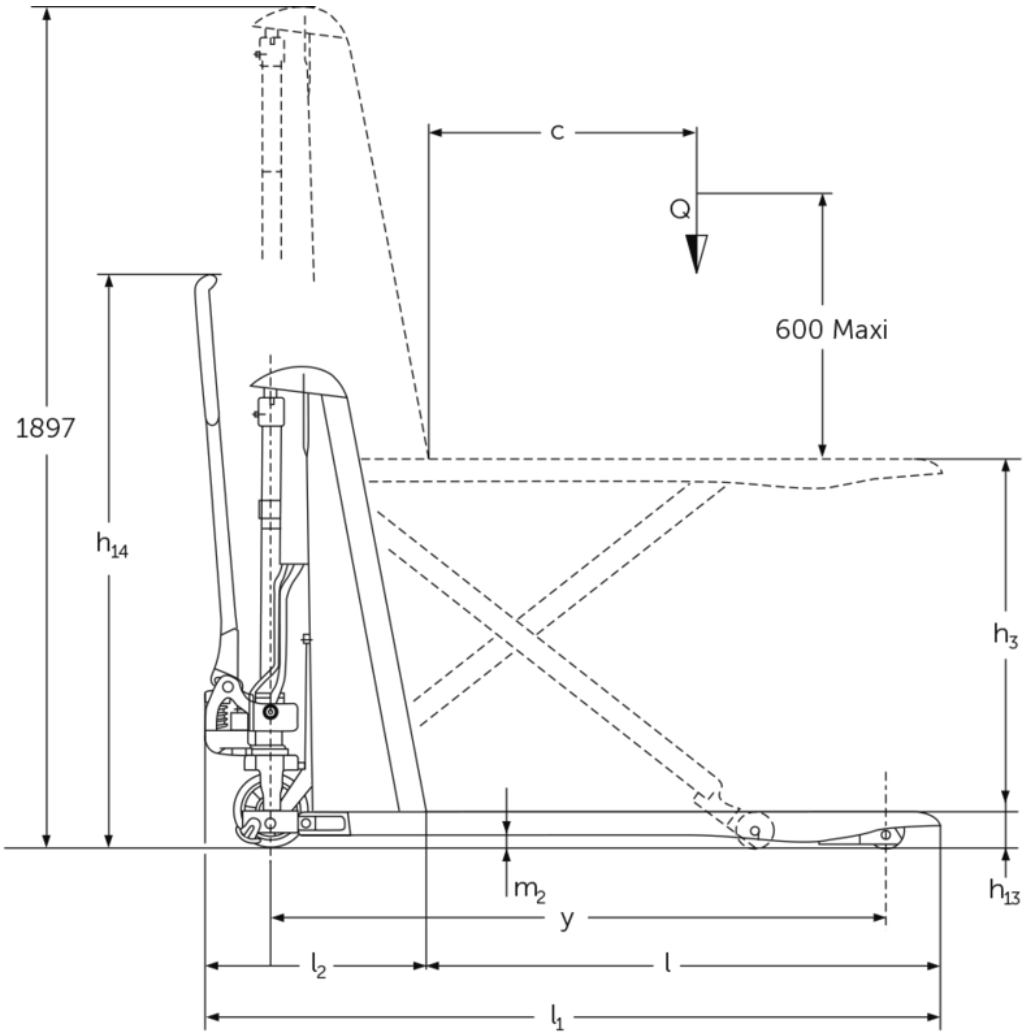

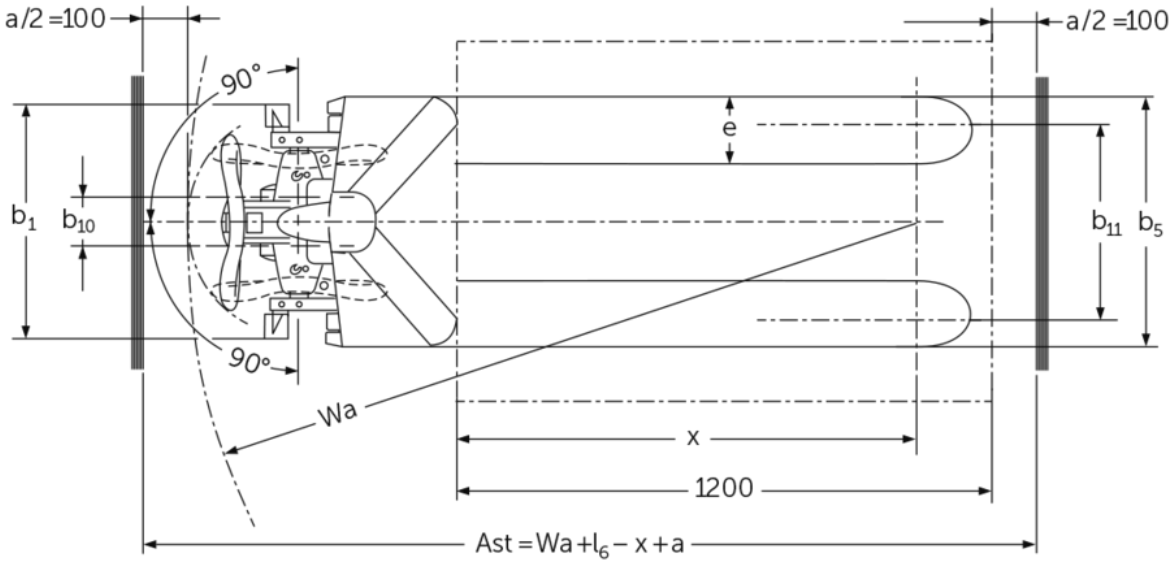

AMX I15e / I15ep

VDI table

(AMX 10)

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)						
	1.2	Manufacturer's type designation			AMX 10						
	1.3	Drive type			Manual						
	1.4	Operation			Manual						
	1.5	Load capacity/load	Q	kg	1000						
	1.6	Load centre distance	c	mm	600						
	1.9	Wheelbase	y	mm	1383						
Weights	2.1	Netto weight		kg	157						
	2.2	Axle load laden front/rear		kg	406 / 751						
	2.3	Axle load unladen front/rear		kg	101 / 56						
Wheels/chassis	3.1	Tyres			V-GV	C-GN	N-GN	V-GV	C-GN	N-GN	
	3.2	Tyre size, front			Ø 170 x 50						
	3.3	Tyre size, rear			Ø 82 x 62						
	3.5	Wheels, number front/back (x=driven)			2/2						
	3.6	Tread width, front	b10	mm	109						
	3.7	Tread width, rear	b11	mm	440						
Basic dimensions	4.4	Lift (h3)	h3	mm	714						
	4.5	Extended mast height (h4)	h4	mm	1897						
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1299						
	4.15	Height, lowered	h13	mm	86						
	4.19	Total length	l1	mm	1650						
	4.20	Length including fork shank	l2	mm	500						
	4.21.1	total width	b1	mm	560			680			
	4.22	Fork dimensions	s/e/l	mm	53 x 150 x 1150						
	4.25	Width across forks	b5	mm	560			680			
	4.32	Ground clearance centre of wheelbase	m2	mm	30						
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	2005						
	4.35	Turning radius	Wa	mm	1635						
Performance data	5.3	Lowering speed laden/unladen		m/s	0.11 / 0.04						

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

(AMX 10e)

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)						
	1.2	Manufacturer's type designation			AMX 10e						
	1.3	Drive type			electric						
	1.4	Operation			Manual						
	1.5	Load capacity/load	Q	kg	1000						
	1.6	Load centre distance	c	mm	600						
	1.9	Wheelbase	y	mm	1383						
Weights	2.1	Netto weight		kg	195						
	2.2	Axle load laden front/rear		kg	443 / 752						
	2.3	Axle load unladen front/rear		kg	136 / 59						
Wheels/chassis	3.1	Tyres			V-GV	C-GN	N-GN	V-GV	C-GN	N-GN	
	3.2	Tyre size, front			Ø 170 x 50						
	3.3	Tyre size, rear			Ø 82 x 62						
	3.5	Wheels, number front/back (x=driven)			2/2						
	3.6	Tread width, front	b10	mm	109						
	3.7	Tread width, rear	b11	mm	440						
Basic dimensions	4.4	Lift (h3)	h3	mm	714						
	4.5	Extended mast height (h4)	h4	mm	1897						
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1299						
	4.15	Height, lowered	h13	mm	86						
	4.19	Total length	l1	mm	1650						
	4.20	Length including fork shank	l2	mm	500						
	4.21.1	total width	b1	mm	560			680			
	4.22	Fork dimensions	s/e/l	mm	53 x 150 x 1150						
	4.25	Width across forks	b5	mm	560			680			
	4.32	Ground clearance centre of wheelbase	m2	mm	30						
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	2005						
	4.35	Turning radius	Wa	mm	1635						
Performance data	5.2	Lift speed laden/unladen		m/s	0.03 / 0.05						
	5.3	Lowering speed laden/unladen		m/s	0.13 / 0.05						

Electric motor/electronics	6.2	Lift motor, performance with S3	kW	0.5
	6.4	Battery voltage/nominal capacity	V / Ah	12 / 70
	6.5	Battery weight	kg	24

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in Norderstedt, Moosburg and Landsberg are certified as well as our Genuine Parts Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.

CE

JUNGHEINRICH