


Hand pallet truck


AMX I15–I15 ep

Lift height: 710 mm / Load capacity: 1500 kg

JUNGHEINRICH

AMX I15–I15 ep

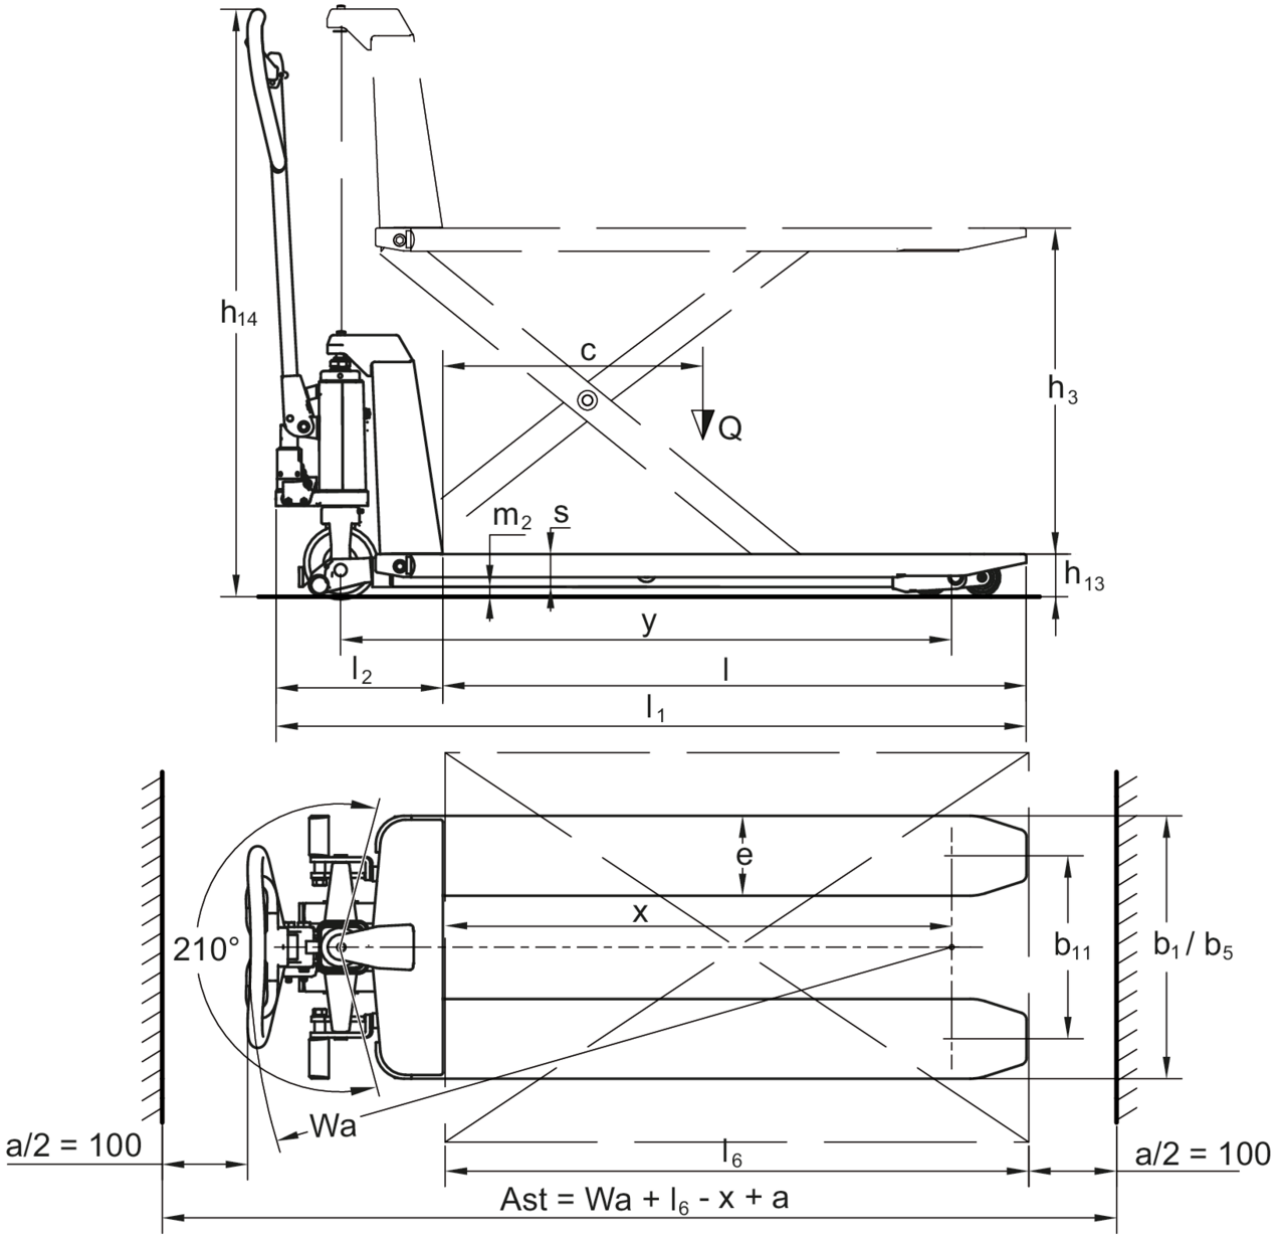

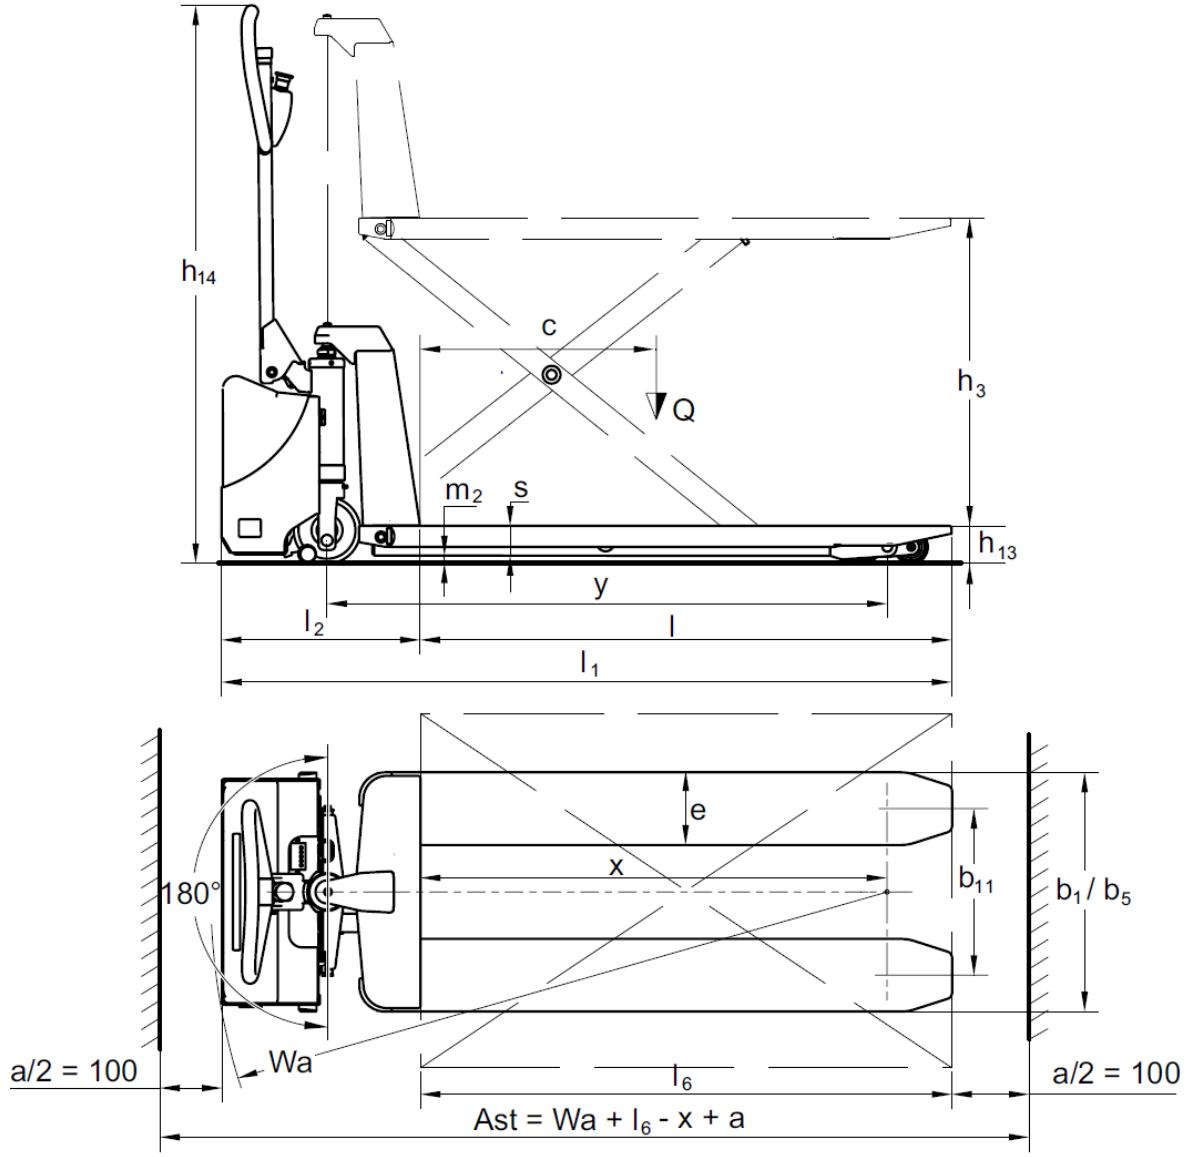
h14
c
Q
h3
m2
s
h13
y
l2
l
l1
e
x
180°
b11
b1 / b5
a/2 = 100
Wa
l6
a/2 = 100
Ast = Wa + l6 - x + a

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)								
	1.2	Manufacturer's type designation			AMX I15e		AMX I15ep		AMX I15		AMX I15p		
	1.3	Drive type			Manual								
	1.4	Operation			Manual								
	1.5	Load capacity/load	Q	kg	1500								
	1.6	Load centre distance	c	mm	600								
	1.9	Wheelbase	y	mm	1255								
Weights	2.1	Netto weight		kg	132				125				
	2.2	Axle load laden front/rear		kg	753 / 357		753 / 387		720 / 358		750 / 358		
	2.3	Axle load unladen front/rear		kg	40 / 100				38 / 70				
Wheels/chassis	3.1	Tyres			N-BN	V-BV	N-BN	V-BV	N-BN	V-BV	N-BN	V-BV	
	3.2	Tyre size, front			Ø 150x45								
	3.3	Tyre size, rear			Ø 75x68								
	3.5	Wheels, number front/back (x=driven)			2/4								
	3.6	Tread width, front	b10	mm	145								
	3.7	Tread width, rear	b11	mm	440								
Basic dimensions	4.4	Lift (h3)	h3	mm	710								
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1270				1230				
	4.15	Height, lowered	h13	mm	85								
	4.19	Total length	l1	mm	1645				1580				
	4.20	Length including fork shank	l2	mm	445				340				
	4.21.1	total width	b1	mm	540								
	4.22	Fork dimensions	s/e/l	mm	50 x 163 x 1200								
	4.25	Width across forks	b5	mm	540								
	4.32	Ground clearance centre of wheelbase	m2	mm	19								
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1690				1630				
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1890				1830				
	4.35	Turning radius	Wa	mm	1540				1480				
Performance data	5.3	Lowering speed laden/unladen		m/s	0.07 / 0.05				0.15 / 0.09				

Electric motor/electronics	6.4	Battery voltage/nominal capacity	V / Ah	12 / 65	-
	6.5	Battery weight	kg	21	-

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

- VDI no. 1.5: From a lift height of 470 mm, the capacity is reduced to 1,000 kg.

The German production facilities in Norderstedt, Moosburg and Landsberg are certified as well as our Genuine Parts Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.

CE

JUNGHEINRICH