

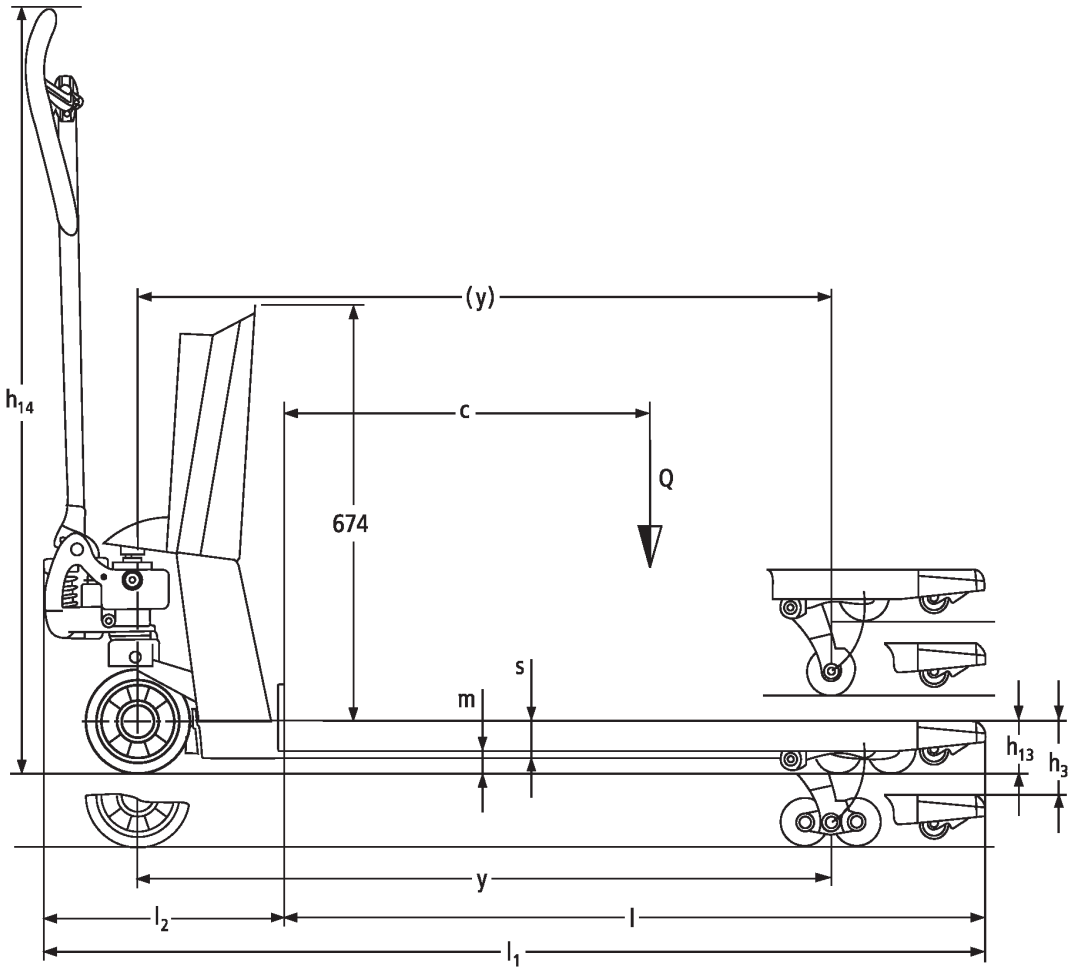
Hand pallet truck with scales

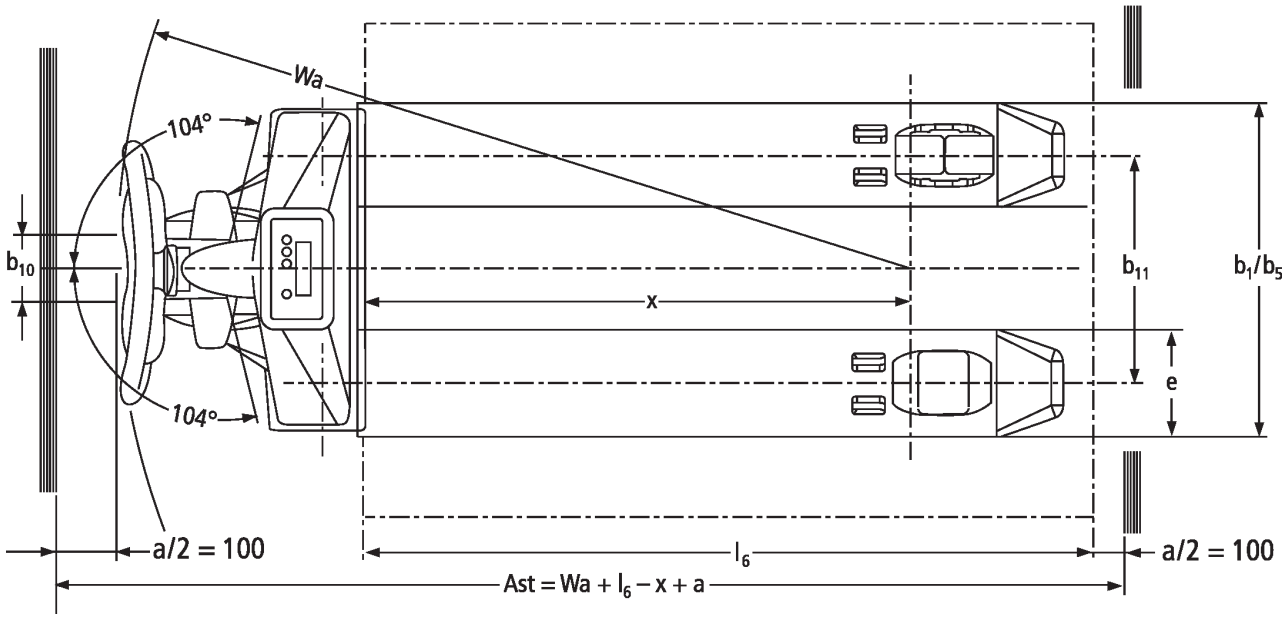
AMW 22/22p

Lift height: 122 mm / Load capacity: 2200 kg

JUNGHEINRICH

AMW 22/22p


h14
(y)
c
Q
674
s
m
h13
h3
y
l2
l
l1


Wa
104°
104°
b10
x
b11
b1/b5
e
a/2 = 100
l6
a/2 = 100
Ast = Wa + l6 – x + a

VDI table

(AMW 22)

Characteristic	1.1	Manufacturer (abbreviated description)		Other (OEM)			
	1.2	Manufacturer's type designation		AMW 22, 540x1150 C/GV	AMW 22, 540x1150 C/BV	AMW 22, 540x1150 V-GV	AMW 22, 540x1150 V/BV
	1.3	Drive type		Manual			
	1.4	Operation		Manual			
	1.5	Load capacity/load	Q kg	2200			
	1.6	Load centre distance	c mm	600			
	1.9	Wheelbase	y mm	1110			
Weights	2.1	Netto weight	kg	99			
	2.2	Axle load laden front/rear	kg	578 / 1721			
	2.3	Axle load unladen front/rear	kg	61 / 38			
Wheels/chassis	3.1	Tyres		C-GV	C-BV	V-GV	V-BV
	3.2	Tyre size, front		Ø 170 x 50			
	3.3	Tyre size, rear		Ø 82 x 96			
	3.5	Wheels, number front/back (x=driven)		2/2			
	3.6	Tread width, front	b10 mm	109			
	3.7	Tread width, rear	b11 mm	370			
Basic dimensions	4.4	Lift (h3)	h3 mm	122			
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1234			
	4.15	Height, lowered	h13 mm	86			
	4.19	Total length	l1 mm	1546			
	4.20	Length including fork shank	l2 mm	396			
	4.21.1	total width	b1 mm	540			
	4.22	Fork dimensions	s/e/l mm	62 x 170 x 1150			
	4.25	Width across forks	b5 mm	540			
	4.32	Ground clearance centre of wheelbase	m2 mm	24			
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast mm	1763			
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1813			
	4.35	Turning radius	Wa mm	1303			
Performance data	5.3	Lowering speed laden/unladen	m/s	0.09 / 0.02			

Electric motor/electronics	6.4	Battery voltage/nominal capacity	V / Ah	12 / 1.2

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

(AMW 22p)

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)								
	1.2	Manufacturer's type designation			AMW 22p, 540x1150 C/GV	AMW 22p, 540x1150 C/BV	AMW 22p, 540x1150 V-GV	AMW 22p, 540x1150 V/BV	AMW 22p (Li), 540x1150 C/GV	AMW 22p (Li), 540x1150 C/BV	AMW 22p (Li), 540x1150 V-GV	AMW 22p (Li), 540x1150 V/BV
	1.3	Drive type			Manual								
	1.4	Operation			Manual								
	1.5	Load capacity/load	Q	kg	2200								
	1.6	Load centre distance	c	mm	600								
	1.9	Wheelbase	y	mm	1110								
Weights	2.1	Netto weight		kg	102								
	2.2	Axle load laden front/rear		kg	578 / 1721								
	2.3	Axle load unladen front/rear		kg	61 / 38								
Wheels/chassis	3.1	Tyres			C-GV	C-BV	V-GV	V-BV	C-GV	C-BV	V-GV	V-BV	
	3.2	Tyre size, front			Ø 170 x 50								
	3.3	Tyre size, rear			Ø 82 x 96								
	3.5	Wheels, number front/back (x=driven)			2/2								
	3.6	Tread width, front	b10	mm	109								
	3.7	Tread width, rear	b11	mm	370								
Basic dimensions	4.4	Lift (h3)	h3	mm	122								
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1234								
	4.15	Height, lowered	h13	mm	86								
	4.19	Total length	l1	mm	1546								
	4.20	Length including fork shank	l2	mm	396								
	4.21.1	total width	b1	mm	540								
	4.22	Fork dimensions	s/e/l	mm	62 x 170 x 1150								
	4.25	Width across forks	b5	mm	540								

	4.32	Ground clearance centre of wheelbase	m2 mm	24	
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast mm	1763	
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	1813	
	4.35	Turning radius	Wa mm	1303	
Performance data	5.3	Lowering speed laden/unladen	m/s	0.09 / 0.02	
Electric motor/electronics	6.4	Battery voltage/ nominal capacity	V / Ah	12 / 1.2	14.8 / 5

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in Norderstedt, Moosburg and Landsberg are certified as well as our Genuine Parts Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.

CE

JUNGHEINRICH