

Electric pedestrian stacker


EJC 110i/112i


Lift height: 1200-4700 mm / Load capacity: 1000-1200 kg

LION technology


JUNGHEINRICH

EJC 110i/112i

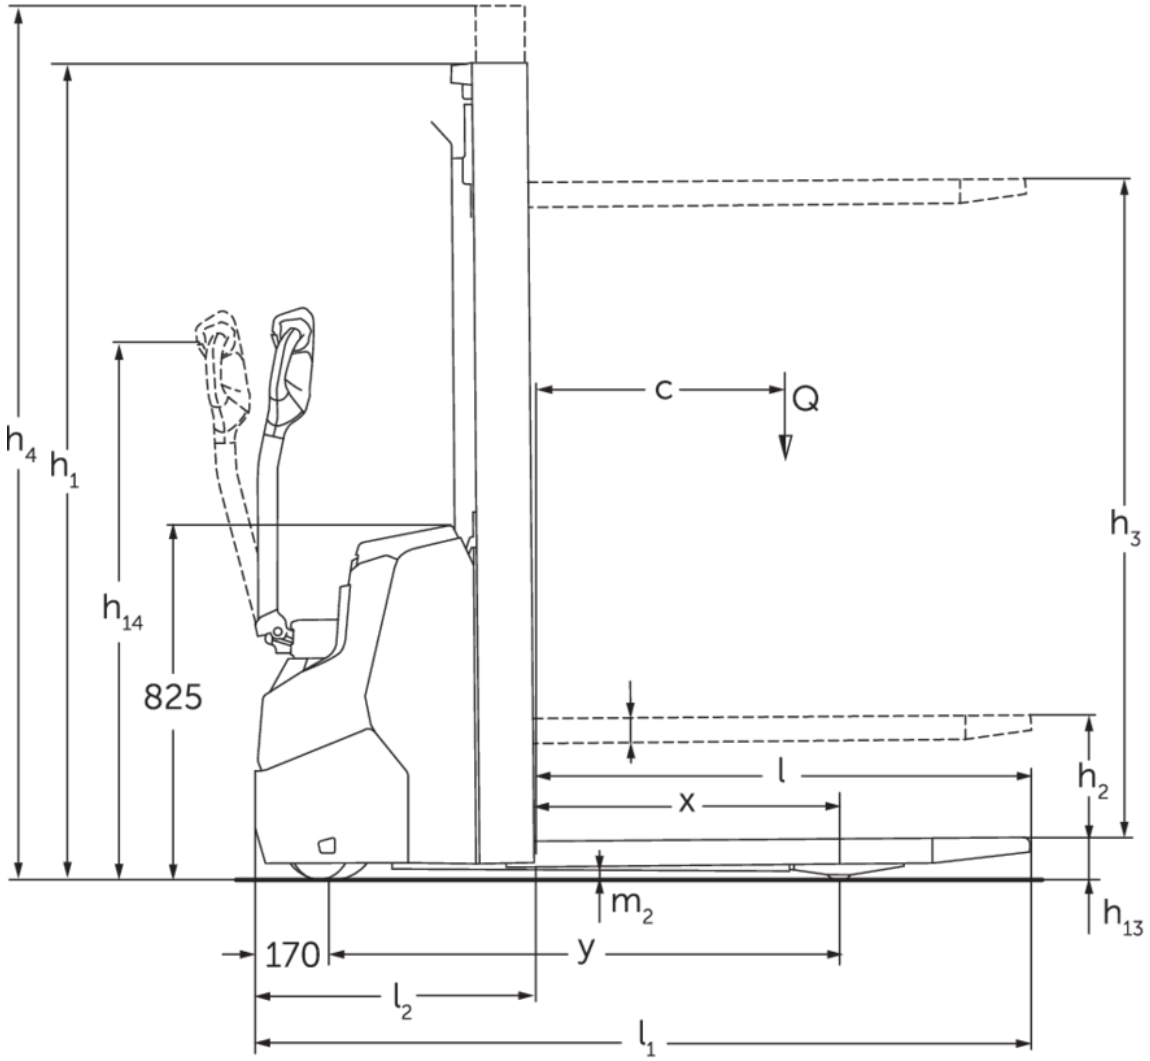

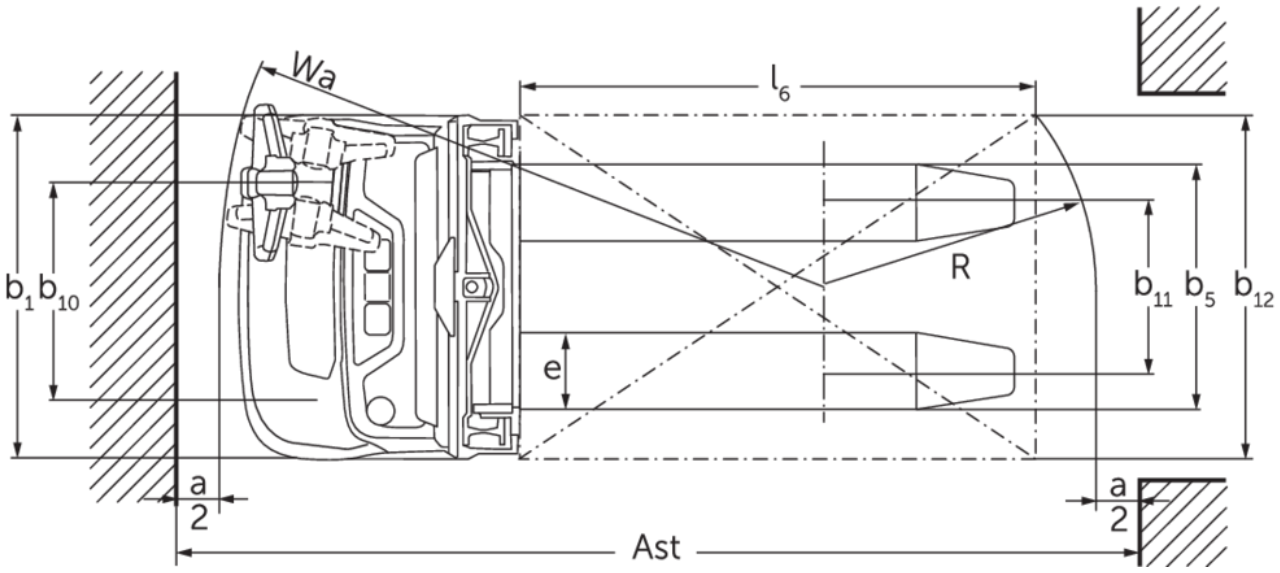

EJC 110i/112i

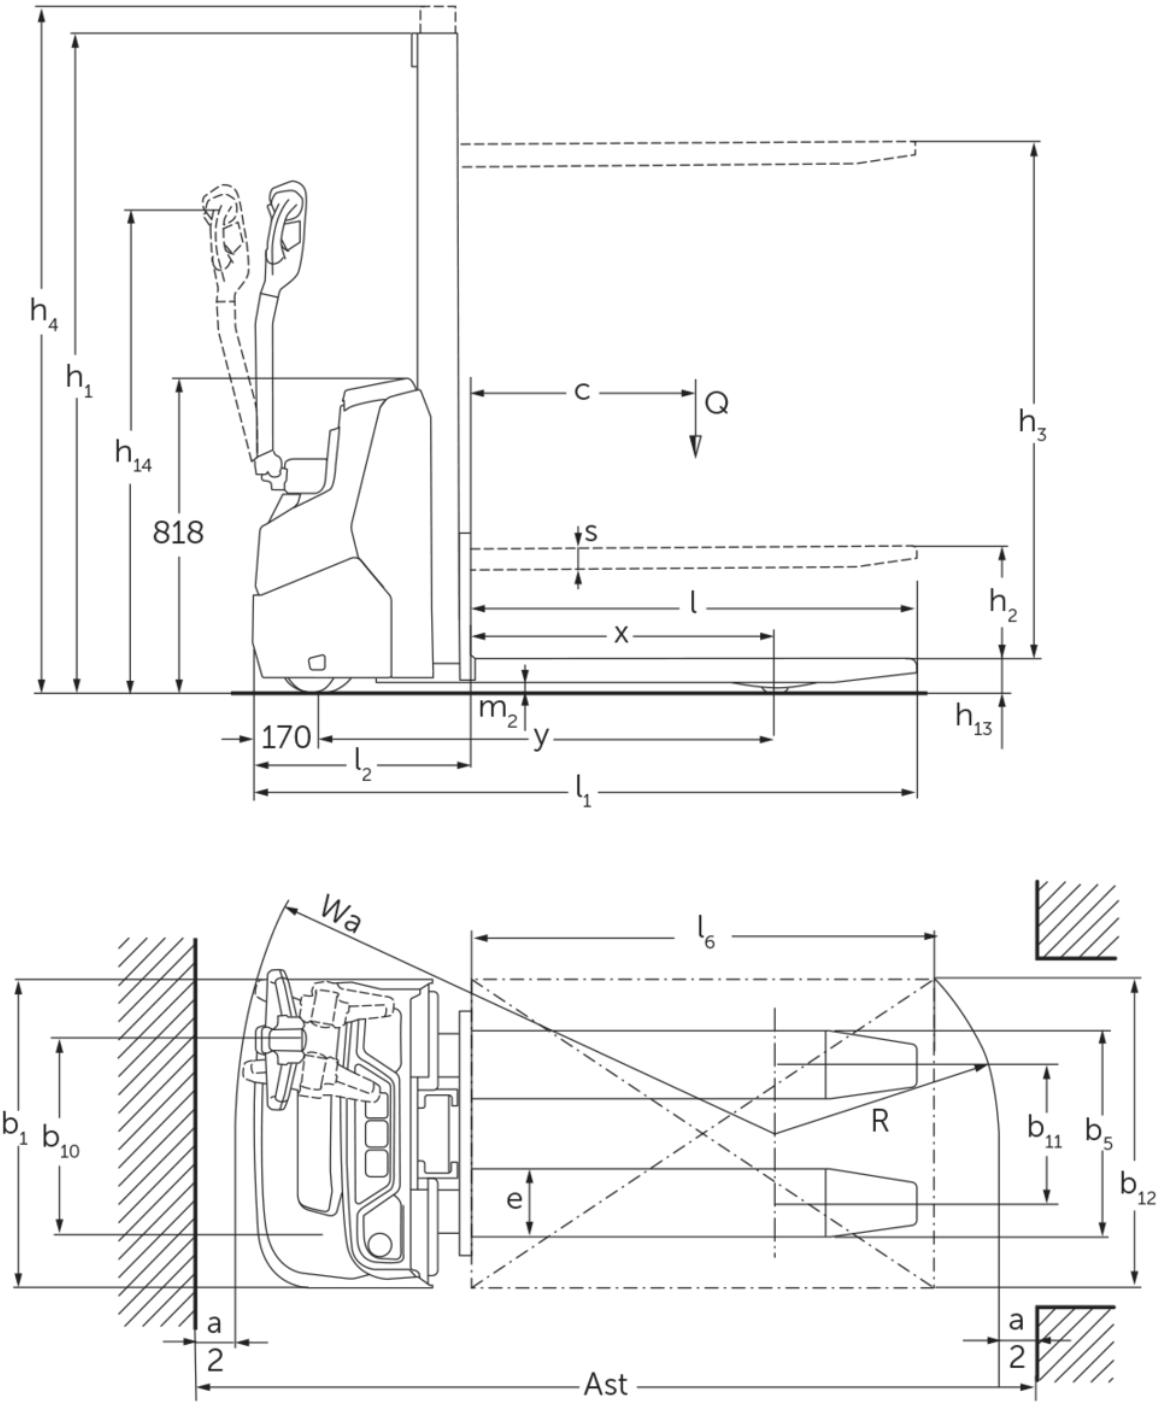
h4
h1
h14
818
c
Q
h3
s
h2
l
x
m2
y
h13
170
l2
l1
Wa
l6
b1
b10
R
b11
b5
b12
e
a
2
Ast

EJC 110i (E)

EJC 110i/112i

EJC 110i (E)	Lift (h3)	Retracted mast height (h1)	Free lift (h2)	Extended mast height (h4)
Mono Mast MM	1200 mm	1710 mm	1200 mm	1710 mm
	1540 mm	1970 mm	1540 mm	1970 mm
	2000 mm	2430 mm	2000 mm	2430 mm
EJC 110i, EJC 112i	**Lift (h3)**	**Retracted mast height (h1)**	**Free lift (h2)**	**Extended mast height (h4)**
Duplex mast ZT	2300 mm	1650 mm	100 mm	2775 mm
	2500 mm	1750 mm	100 mm	2975 mm
	2700 mm	1850 mm	100 mm	3175 mm
	2900 mm	1950 mm	100 mm	3375 mm
	3200 mm	2100 mm	100 mm	3675 mm
	3600 mm	2300 mm	100 mm	4075 mm
	3900 mm	2450 mm	100 mm	4375 mm
Duplex mast ZZ	2300 mm	1600 mm	1125 mm	2775 mm
	2500 mm	1700 mm	1225 mm	2975 mm
	2900 mm	1900 mm	1425 mm	3375 mm
	3200 mm	2050 mm	1575 mm	3675 mm
	3600 mm	2250 mm	1775 mm	4075 mm
	3900 mm	2400 mm	1925 mm	4375 mm
Triplex mast DZ	4090 mm	1845 mm	1338 mm	4597 mm
	4300 mm	1915 mm	1408 mm	4807 mm
EJC 112i	**Lift (h3)**	**Retracted mast height (h1)**	**Free lift (h2)**	**Extended mast height (h4)**
Duplex mast ZT	4100 mm	2550 mm	100 mm	4575 mm
	4300 mm	2650 mm	100 mm	4775 mm
Triplex mast DZ	4700 mm	2050 mm	1564 mm	5213 mm

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich		
	1.2	Manufacturer's type designation			EJC 110i (E)	EJC 110i	EJC 112i
	1.3	Drive type			electric		
	1.4	Operation			Pedestrian		
	1.5	Load capacity/load	Q	kg	1000		1200
	1.6	Load centre distance	c	mm	600		
	1.8	Load distance, centre of drive axle to fork	x	mm	783	707	
	1.9	Wheelbase	y	mm	1171	1141	
Weights	2.1.1	Service weight (incl. battery)		kg	480	665	675
	2.2	Axle load laden front/rear		kg	500 / 980	556 / 1109	580 / 1295
	2.3	Axle load unladen front/rear		kg	350 / 130	465 / 200	475 / 200
Wheels/chassis	3.1	Tyres			Polyurethane (PU)		
	3.2	Tyre size, front			Ø 210 x 70	Ø 230 x 70	
	3.3	Tyre size, rear			Ø 75 x 70 / Ø 75 x 45	ø75x105 / ø75x80	Ø 75 x 105 / ø75x80
	3.4	Additional wheels			Ø 140 x 54		
	3.5	Wheels, number front/back (x=driven)			1x +1/2		
	3.6	Tread width, front	b10	mm	507		
	3.7	Tread width, rear	b11	mm	394	405	
Basic dimensions	4.2	Retracted mast height (h1)	h1	mm	1970	1950	
	4.3	Free lift (h2)	h2	mm	1540	100	
	4.4	Lift (h3)	h3	mm	1540	2900	
	4.5	Extended mast height (h4)	h4	mm	1970	3375	
	4.9	Height of tiller handle in drive position min./max.	h14	mm	750 / 1260		
	4.15	Height, lowered	h13	mm	90		
	4.19	Total length	l1	mm	1714	1754	
	4.20	Length including fork shank	l2	mm	564	604	
	4.21.1	total width	b1	mm	800		
	4.22	Fork dimensions	s/e/l	mm	60 x 178 x 1150		
	4.25	Width across forks	b5	mm	535	570	
	4.32	Ground clearance centre of wheelbase	m2	mm	27	24	
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1961	2002	
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	2011	2052	
	4.35	Turning radius	Wa	mm	1394	1359	
Performance data	5.1	Travel speed laden/unladen		km/h	5.3 / 5.3	6 / 6	
	5.2	Lift speed laden/unladen		m/s	0.15 / 0.25	0.15 / 0.27	0.17 / 0.33
	5.3	Lowering speed laden/unladen		m/s	0.15 / 0.15	0.34 / 0.34	0.45 / 0.37
	5.8	Max. gradeability laden/unladen		%	6 / 10	6 / 14	
	5.10	Service brake			generative		

Electric motor/electronics	6.1	Drive motor, performance S2 60 min	kW	1	0.9	
	6.2	Lift motor, performance with S3	kW	1.2	2.2	2.8
	6.3	Battery according to DIN 43531/35/36		no		
	6.4	Battery voltage/nominal capacity	V / Ah	24 / 50	24 / 100	
	6.5	Battery weight	kg	24	35	
	6.6.1	Energy consumption according to EN cycle	kWh/h	0.35	0.66	
	6.6.2	CO2 equivalent according to EN ISO 23308	kg/h	0.19	0.36	
Other	8.1	Type of drive control		AC		
	10.7	Sound pressure level according to EN12053	dB (A)	64	65	

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The following applies to the EJC 110i / 112i:
The values in the table apply for the XS battery compartment, ZT2900 mast, battery 100 Ah.
- VDI no. 1.8: with DZ mast: x - 40 mm
- VDI no. 1.9: with S battery compartment: y + 50 mm.
- VDI no. 4.19: with S battery compartment: l1 + 50 mm. with DZ mast: l1 + 40 mm.
- VDI no. 4.20: with S battery compartment: l2 + 50 mm; with DZ mast: l2 + 40 mm.
- VDI no. 4.34.1: diagonal as per VDI: aisle width + 225 mm; with S battery compartment: aisle width + 48; with DZ mast: aisle width + 40 mm.
- VDI no. 4.34.2: diagonal as per VDI: aisle width + 142 mm; with S battery compartment: aisle width + 48 mm. With DZ mast: aisle width + 40 mm.
- VDI no. 4.35: with S battery compartment: Wa + 48 mm.
- VDI no. 6.2: EJC 110i: S3 5%: EJC 112i: S3 13%

The following applies for EJC 110i (E):
The values in the table apply for the MM 1540 mast.
- VDI no. 4.3: Free lift (h2) - 34 mm.
- VDI no. 4.4: Lift (h3) - 30 mm.
- VDI no. 4.5: Extended mast height (h4) + 34 mm.
- VDI no. 4.34.1: diagonal as per VDI: aisle width + 271 mm.
- VDI no. 4.34.2: diagonal as per VDI: aisle width + 161 mm.

The German production facilities in Norderstedt, Moosburg and Landsberg are certified as well as our Genuine Parts Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.

CE

JUNGHEINRICH