

Hand pallet truck


AM l20/l20p

Lift height: 120 mm / Load capacity: 2000 kg


JUNGHEINRICH

AM l20/l20p


AM l20

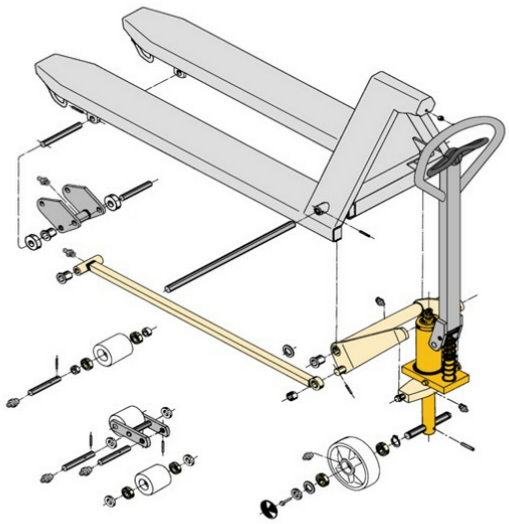


AM l20p

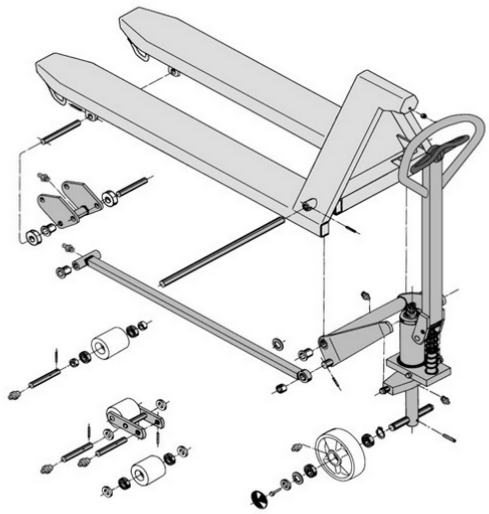

Inox AISI 316 (V4A)	Feuerverzinkt
Inox AISI 303/304 (V2A)	Verzinkt und gelb chromatiert

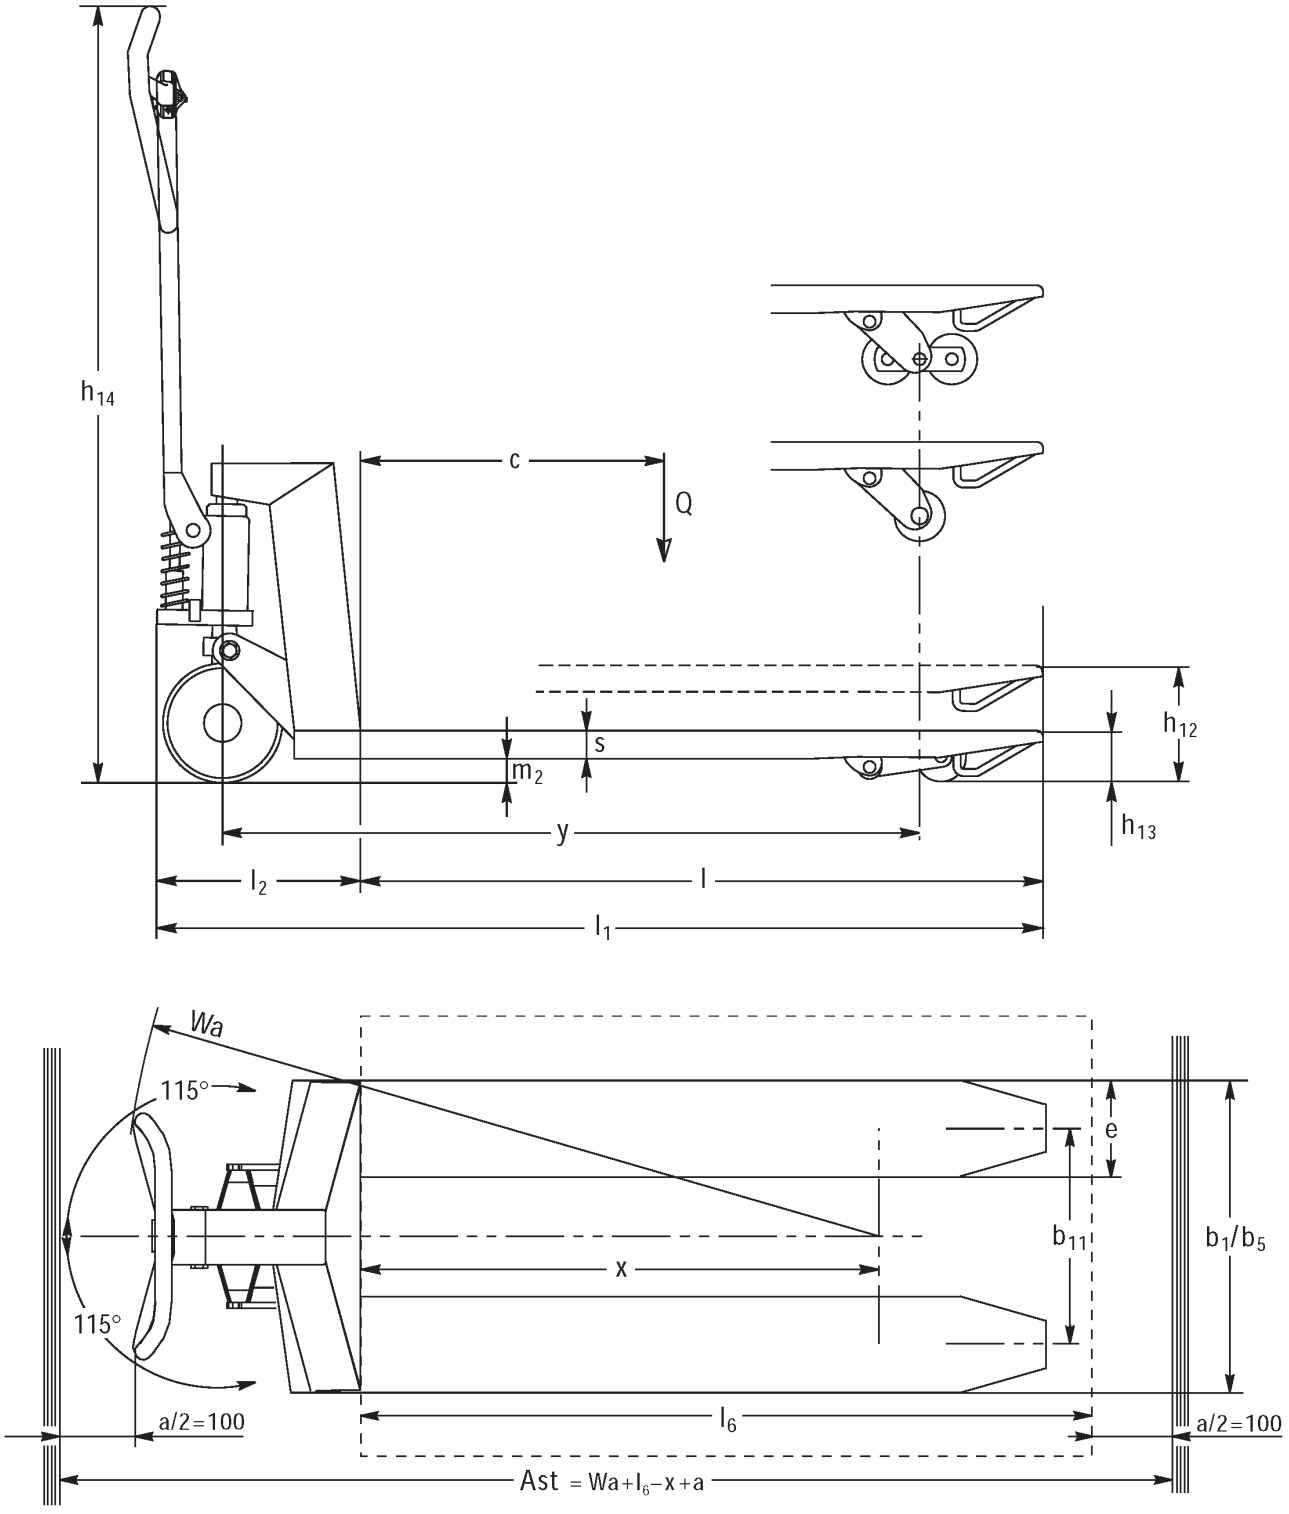
h14
c
Q
s
m2
h12
h13
y
l2
l
l1
Wa
115°
115°
e
b11
b1/b5
x
a/2=100
l6
a/2=100
Ast = Wa+l6–x+a

AM I20

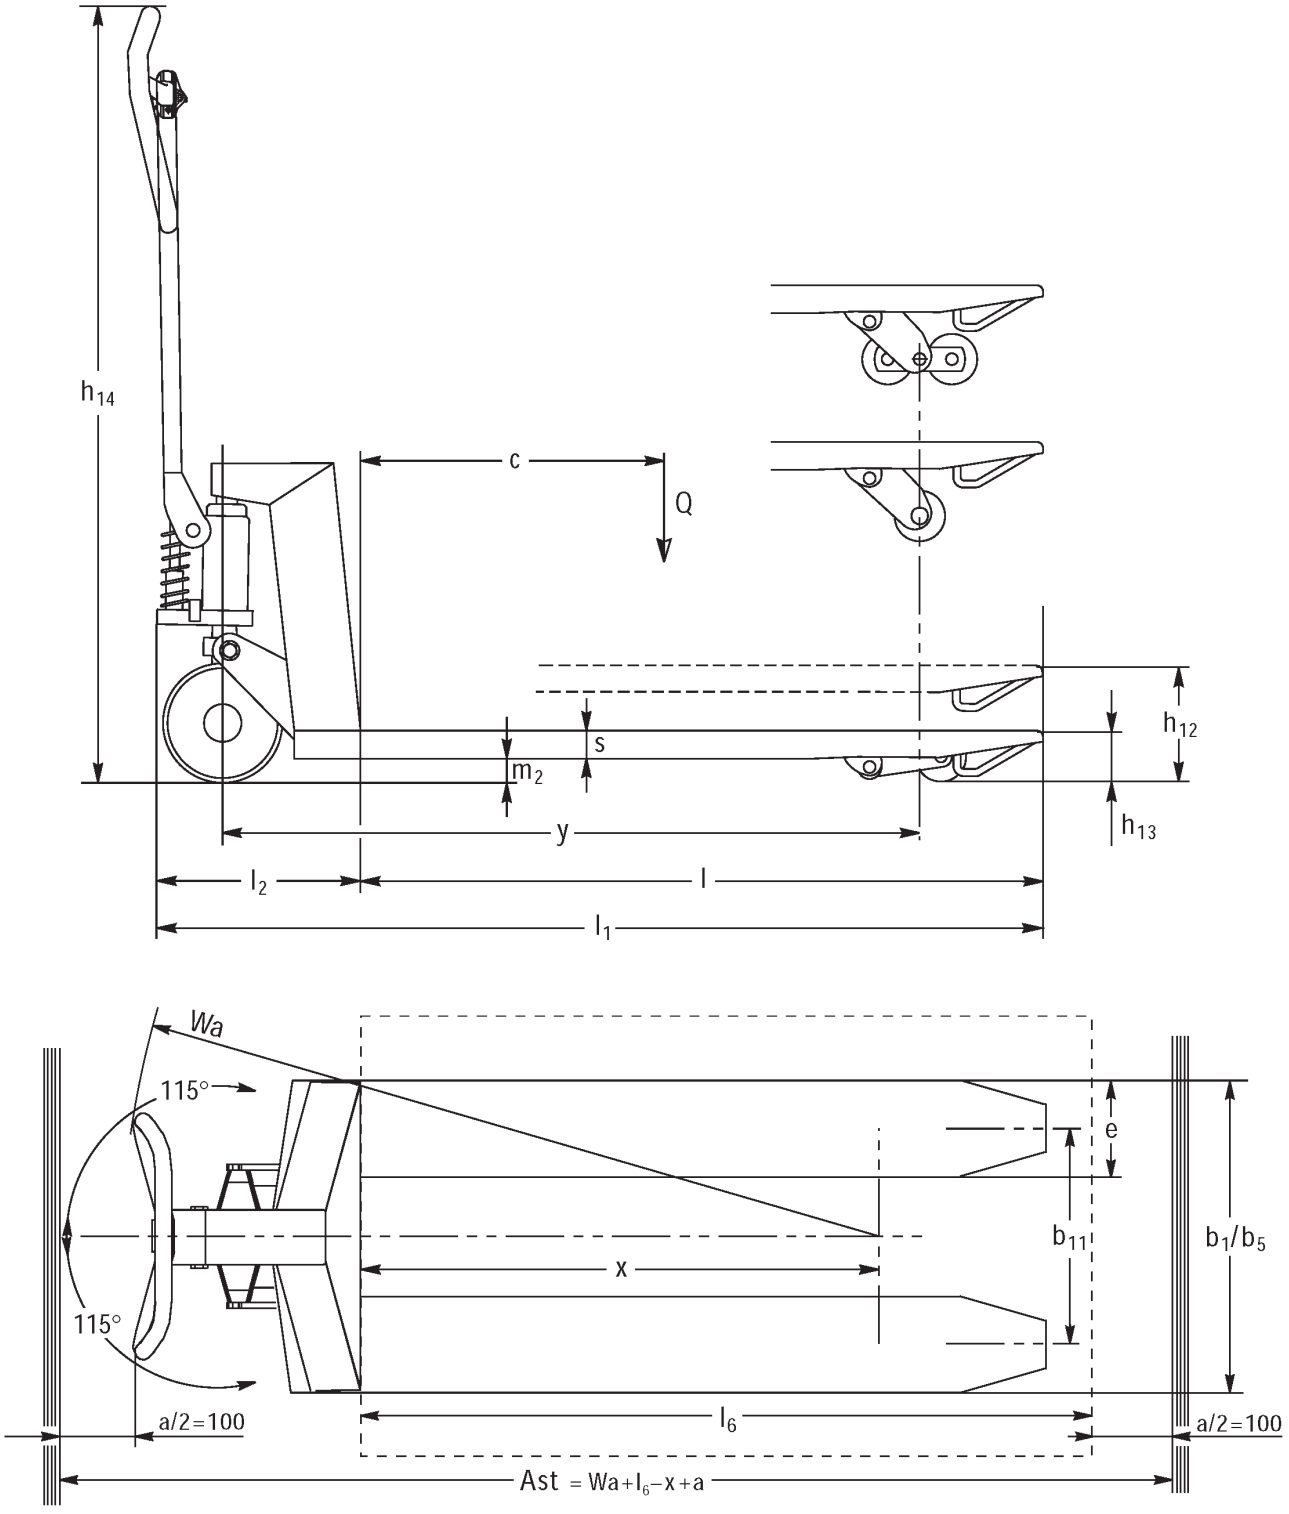
h14
c
Q
s
m2
h12
h13
y
l2
l
l1
Wa
115°
115°
e
b11
b1/b5
x
a/2=100
l6
a/2=100
Ast = Wa+l6–x+a

AM I20p

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)								
	1.2	Manufacturer's type designation			AM I20 / I20p								
	1.3	Drive			Manual								
	1.4	Operation			Manual								
	1.5	Load capacity/load	Q	kg	2000								
	1.6	Load centre distance	c	mm	610				570				
	1.9	Wheelbase	y	mm	1245				1165				
Weights	2.1	tare weight		kg	81		78				75		
	2.1.1	Service weight (incl. battery)		kg	81		78		64				
Wheels/suspension system	3.1	Tyres			V-BV	N-BN	V-GV	N-GN	V-BV	N-BN	C-GV	N-GN	
	3.2	Tyre size, front			Ø 200x50								
	3.3	Tyre size, rear			Ø 80x70	Ø 80x65	Ø 80x90		Ø 80x70	Ø 80x65	Ø 80x90		
	3.5	Wheels, number front/back (x=driven)			2/2								
	3.6	Tread width, front	b10	mm	120								
	3.7	Tread width, rear	b11	mm	520								
Basic dimensions	4.4	Lift (h3)	h3	mm	120								
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170								
	4.14	Stand height, elevated	h12	mm	205								
	4.15	Height, lowered	h13	mm	85								
	4.19	total length	l1	mm	1555				1475				
	4.21.1	total width	b1	mm	680								
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220				51 x 160 x 1140				
	4.25	Width across forks	b5	mm	680								
	4.32	Ground clearance centre of wheelbase	m2	mm	34								
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1610								
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830				1810				
	4.35	Turning radius	Wa	mm	1410				1330				
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05								

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)									
	1.2	Manufacturer's type designation			AM I20 / I20p									
	1.3	Drive			Manual									
	1.4	Operation			Manual									
	1.5	Load capacity/load	Q	kg	2000									
	1.6	Load centre distance	c	mm	485						405			
	1.9	Wheelbase	y	mm	995						835			
Weights	2.1	tare weight		kg	72		69				65			
	2.1.1	Service weight (incl. battery)		kg	72		69		66		64			
Wheels/suspension system	3.1	Tyres			V-BV	N-BN	V-GV		N-GN		V-BV	N-BN	V-GV	N-GN
	3.2	Tyre size, front			Ø 200x50									
	3.3	Tyre size, rear			Ø 80x70	Ø 80x65	Ø 80x90				Ø 80x70	Ø 80x65	Ø 80x90	
	3.5	Wheels, number front/back (x=driven)			2/2									
	3.6	Tread width, front	b10	mm	120									
	3.7	Tread width, rear	b11	mm	520									
Basic dimensions	4.4	Lift (h3)	h3	mm	120									
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170									
	4.14	Stand height, elevated	h12	mm	205									
	4.15	Height, lowered	h13	mm	85									
	4.19	total length	l1	mm	1305						1145			
	4.21.1	total width	b1	mm	680									
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 970						51 x 160 x 810			
	4.25	Width across forks	b5	mm	680									
	4.32	Ground clearance centre of wheelbase	m2	mm	34									
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1610									
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810									
	4.35	Turning radius	Wa	mm	1160						1000			
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05									

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)										
	1.2	Manufacturer's type designation			AM I20 / I20p										
	1.3	Drive			Manual										
	1.4	Operation			Manual										
	1.5	Load capacity/load	Q	kg	2000										
	1.6	Load centre distance	c	mm	610						570				
	1.9	Wheelbase	y	mm	1245						1165				
Weights	2.1	tare weight		kg	75			72				69			
	2.1.1	Service weight (incl. battery)		kg	75		72			64					
	2.2	Axle load laden front/rear		-	- / -									636 / 1432	
	2.3	Axle load unladen front/rear		-	- / -									21 / 47	
Wheels/suspension system	3.1	Tyres			V-BV	N-BN	V-GV	N-GN	V-BV	N-BN	V-GV	N-GN			
	3.2	Tyre size, front			Ø 200x50										
	3.3	Tyre size, rear			Ø 80x70	Ø 80x65	Ø 80x90		Ø 80x70	Ø 80x65	Ø 80x90				
	3.5	Wheels, number front/back (x=driven)			2/2										
	3.6	Tread width, front	b10	mm	120										
	3.7	Tread width, rear	b11	mm	360										
Basic dimensions	4.4	Lift (h3)	h3	mm	120										
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170									1220 / 1170	
	4.14	Stand height, elevated	h12	mm	205										
	4.15	Height, lowered	h13	mm	85										
	4.19	total length	l1	mm	1555						1475				
	4.20	Length including fork shank	l2	mm	-									340	
	4.21.1	total width	b1	mm	520										
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1220						51 x 160 x 1140				
	4.25	Width across forks	b5	mm	520										
	4.32	Ground clearance centre of wheelbase	m2	mm	34										
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1610										
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1830						1810				
	4.35	Turning radius	Wa	mm	1410						1330				
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05										

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)									
	1.2	Manufacturer's type designation			AM I20 / I20p									
	1.3	Drive			Manual									
	1.4	Operation			Manual									
	1.5	Load capacity/load	Q	kg	2000									
	1.6	Load centre distance	c	mm	485						405			
	1.9	Wheelbase	y	mm	995						835			
Weights	2.1	tare weight		kg	66		63				59			
	2.1.1	Service weight (incl. battery)		kg	66		63				64			
Wheels/suspension system	3.1	Tyres			V-BV	N-BN	V-GV	N-GN	V-BV	N-BN	V-GV	N-GN		
	3.2	Tyre size, front			Ø 200x50									
	3.3	Tyre size, rear			Ø 80x70	Ø 80x65	Ø 80x90		Ø 80x70	Ø 80x65	Ø 80x90			
	3.5	Wheels, number front/back (x=driven)			2/2									
	3.6	Tread width, front	b10	mm	120									
	3.7	Tread width, rear	b11	mm	360				335			360		
Basic dimensions	4.4	Lift (h3)	h3	mm	120									
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170									
	4.14	Stand height, elevated	h12	mm	205									
	4.15	Height, lowered	h13	mm	85									
	4.19	total length	l1	mm	1305				1145					
	4.21.1	total width	b1	mm	520									
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 970				51 x 160 x 810					
	4.25	Width across forks	b5	mm	520									
	4.32	Ground clearance centre of wheelbase	m2	mm	34									
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1610									
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810									
	4.35	Turning radius	Wa	mm	1160				1000					
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05									

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)										
	1.2	Manufacturer's type designation			AM I20 / I20p										
	1.3	Drive			Manual										
	1.4	Operation			Manual										
	1.5	Load capacity/load	Q	kg	2000										
	1.6	Load centre distance	c	mm	405						485				
	1.9	Wheelbase	y	mm	835						995				
Weights	2.1	tare weight		kg	59		63						66		
	2.1.1	Service weight (incl. battery)		kg	59		63						66		
Wheels/suspension system	3.1	Tyres			N-GN	V-GV	N-BN	V-BV	N-GN	V-GV			N-BN	V-BV	
	3.2	Tyre size, front			Ø 200x50										
	3.3	Tyre size, rear			Ø 80x90		Ø 80x65	Ø 80x70	Ø 80x90				Ø 80x65	Ø 80x70	
	3.5	Wheels, number front/back (x=driven)			2/2										
	3.6	Tread width, front	b10	mm	120										
	3.7	Tread width, rear	b11	mm	360										
Basic dimensions	4.4	Lift (h3)	h3	mm	120										
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170										
	4.14	Stand height, elevated	h12	mm	200										
	4.15	Height, lowered	h13	mm	85										
	4.19	total length	l1	mm	1145						1305				
	4.21.1	total width	b1	mm	520										
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 810						51 x 160 x 970				
	4.25	Width across forks	b5	mm	520										
	4.32	Ground clearance centre of wheelbase	m2	mm	34	38									
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1610										
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810										
	4.35	Turning radius	Wa	mm	1000						1160				
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05										

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)									
	1.2	Manufacturer's type designation			AM I20 / I20p									
	1.3	Drive			Manual									
	1.4	Operation			Manual									
	1.5	Load capacity/load	Q	kg	2000									
	1.6	Load centre distance	c	mm	570						610			
	1.9	Wheelbase	y	mm	1165						1245			
Weights	2.1	tare weight		kg	69				72				75	
	2.1.1	Service weight (incl. battery)		kg	69				72				75	
	2.2	Axle load laden front/rear		kg	636 / 1432				- / -					
	2.3	Axle load unladen front/rear		kg	21 / 47				- / -					
Wheels/suspension system	3.1	Tyres			N-GN	V-GV	N-BN	V-BV	N-GN	V-GV	N-BN	V-BV		
	3.2	Tyre size, front			Ø 200x50									
	3.3	Tyre size, rear			Ø 80x90		Ø 80x65	Ø 80x70	Ø 80x90		Ø 80x65	Ø 80x90		
	3.5	Wheels, number front/back (x=driven)			2/2									
	3.6	Tread width, front	b10	mm	120									
	3.7	Tread width, rear	b11	mm	360									
Basic dimensions	4.4	Lift (h3)	h3	mm	120									
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170									
	4.14	Stand height, elevated	h12	mm	200									
	4.15	Height, lowered	h13	mm	85									
	4.19	total length	l1	mm	1475						1555			
	4.20	Length including fork shank	l2	mm	340				-					
	4.21.1	total width	b1	mm	520									
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140						51 x 160 x 1220			
	4.25	Width across forks	b5	mm	520									
	4.32	Ground clearance centre of wheelbase	m2	mm	38									
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1610									
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810						1830			
	4.35	Turning radius	Wa	mm	1330						1410			
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05									

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)										
	1.2	Manufacturer's type designation			AM I20 / I20p										
	1.3	Drive			Manual										
	1.4	Operation			Manual										
	1.5	Load capacity/load	Q	kg	2000										
	1.6	Load centre distance	c	mm	405						485				
	1.9	Wheelbase	y	mm	835						995				
Weights	2.1	tare weight		kg	65		69						72		
	2.1.1	Service weight (incl. battery)		kg	65		69						72		
Wheels/suspension system	3.1	Tyres			N-GN	V-GV	V-BV	N-BN	N-GN	V-GV			N-BN	V-BV	
	3.2	Tyre size, front			Ø 200x50										
	3.3	Tyre size, rear			Ø 80x90		Ø 80x70	Ø 80x65	Ø 80x90				Ø 80x65	Ø 80x70	
	3.5	Wheels, number front/back (x=driven)			2/2										
	3.6	Tread width, front	b10	mm	120										
	3.7	Tread width, rear	b11	mm	520										
Basic dimensions	4.4	Lift (h3)	h3	mm	120										
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170										
	4.14	Stand height, elevated	h12	mm	200										
	4.15	Height, lowered	h13	mm	85										
	4.19	total length	l1	mm	1145						1305				
	4.21.1	total width	b1	mm	680										
	4.22	Fork dimensions	s/ e/l	mm	51 x 160 x 810						51 x 160 x 970				
	4.25	Width across forks	b5	mm	680										
	4.32	Ground clearance centre of wheelbase	m2	mm	38										
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1610										
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810										
	4.35	Turning radius	Wa	mm	1000						1160				
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05										

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)									
	1.2	Manufacturer's type designation			AM I20 / I20p									
	1.3	Drive			Manual									
	1.4	Operation			Manual									
	1.5	Load capacity/load	Q	kg	2000									
	1.6	Load centre distance	c	mm	570						610			
	1.9	Wheelbase	y	mm	1165						1245			
Weights	2.1	tare weight		kg	75			78						81
	2.1.1	Service weight (incl. battery)		kg	75			78						81
Wheels/suspension system	3.1	Tyres			N-GN	V-GV		N-BN	V-BN		N-GN	V-GV	V-BV	N-BN
	3.2	Tyre size, front			Ø 200x50									
	3.3	Tyre size, rear			Ø 80x90			Ø 80x65	Ø 80x70		Ø 80x90			Ø 80x65
	3.5	Wheels, number front/back (x=driven)			2/2									
	3.6	Tread width, front	b10	mm	120									
	3.7	Tread width, rear	b11	mm	520									
Basic dimensions	4.4	Lift (h3)	h3	mm	120									
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1170									
	4.14	Stand height, elevated	h12	mm	200									
	4.15	Height, lowered	h13	mm	85									
	4.19	total length	l1	mm	1475						1555			
	4.21.1	total width	b1	mm	680									
	4.22	Fork dimensions	s/e/l	mm	51 x 160 x 1140						51 x 160 x 1220			
	4.25	Width across forks	b5	mm	680									
	4.32	Ground clearance centre of wheelbase	m2	mm	38									
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1610									
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1810						1830			
	4.35	Turning radius	Wa	mm	1330						1410			
Performance data	5.3	Lowering speed laden/unladen		m/s	0.1 / 0.05									

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in Norderstedt, Moosburg and Landsberg are certified as well as our Genuine Parts Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.

CE

JUNGHEINRICH