

Electric pedestrian stacker with support arm lift


EJC 110zi/112zi


Lift height: 2300-4700 mm / Load capacity: 1000-1200 kg

LI-ION technology

JUNGHEINRICH

EJC 110zi/112zi

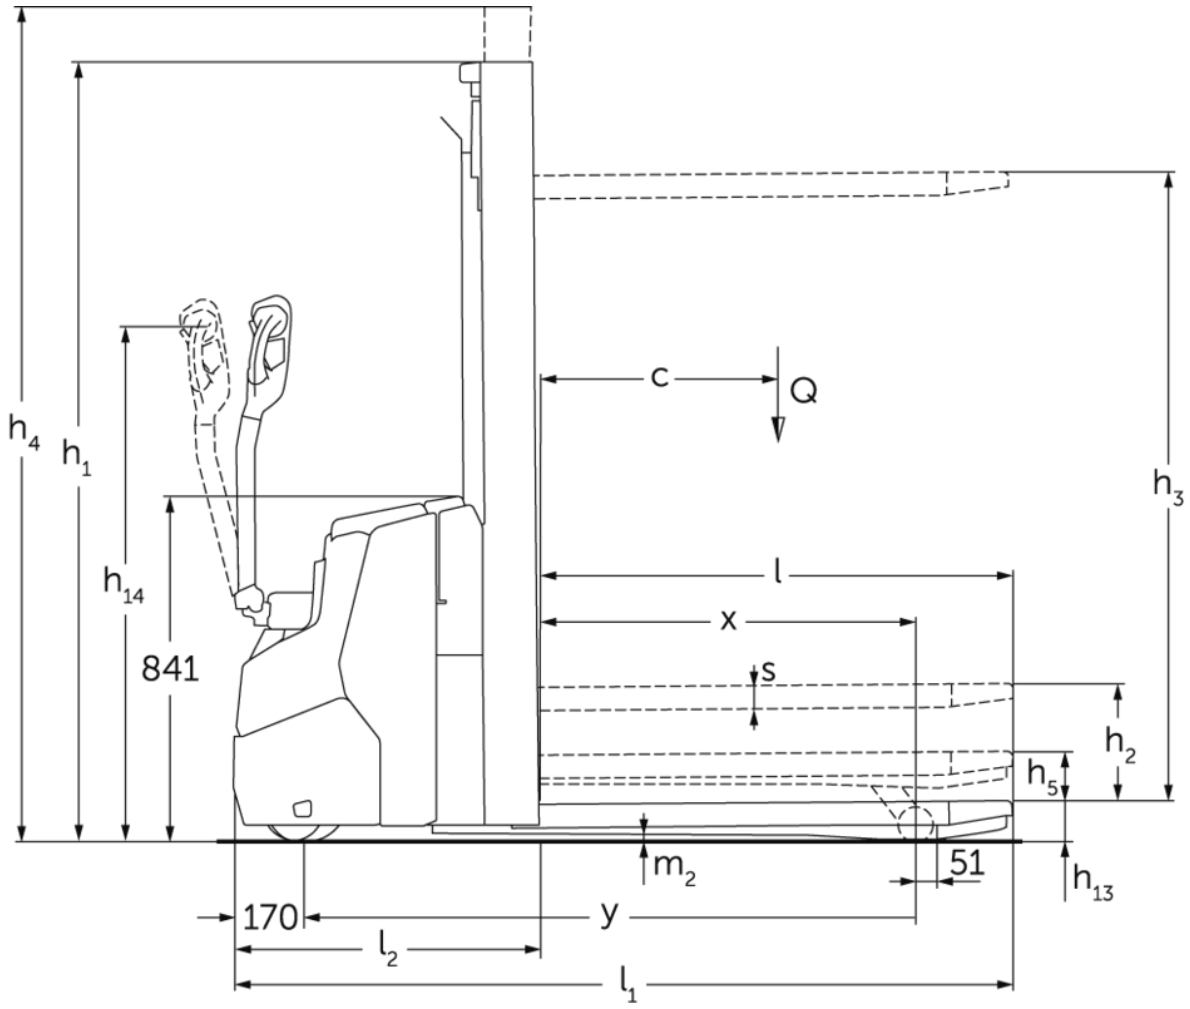

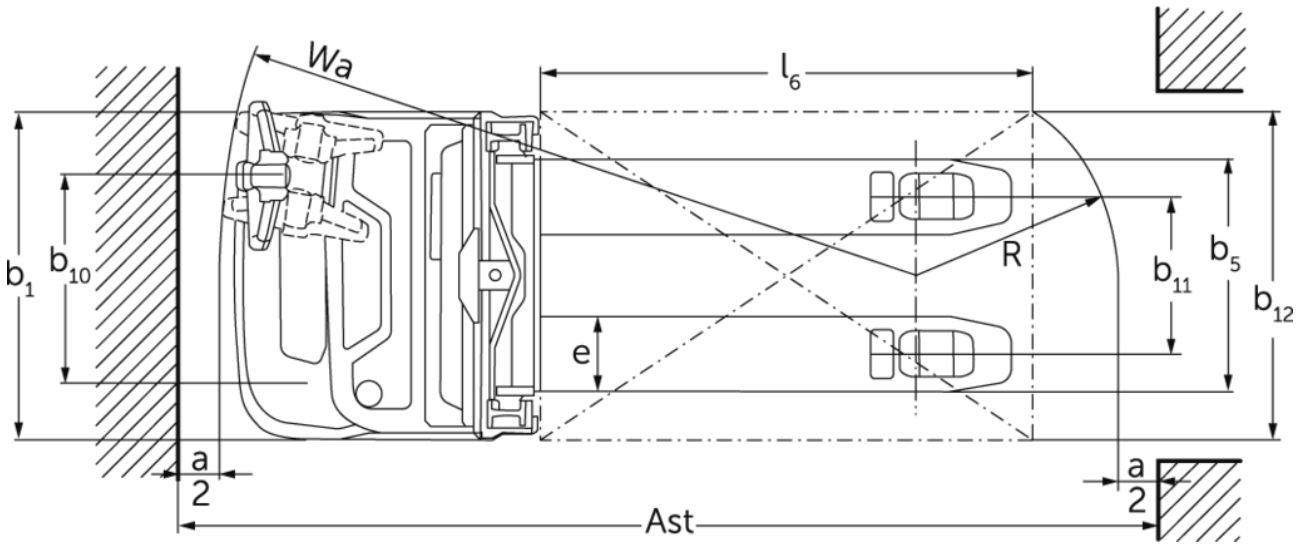

EJC 110zi/112zi

EJC 110zi, EJC 112zi	Lift (h3)	Retracted mast height (h1)	Free lift (h2)	Extended mast height (h4)
Duplex mast ZT	2300 mm	1650 mm	100 mm	2775 mm
	2500 mm	1750 mm	100 mm	2975 mm
	2700 mm	1850 mm	100 mm	3175 mm
	2900 mm	1950 mm	100 mm	3375 mm
	3200 mm	2100 mm	100 mm	3675 mm
	3600 mm	2300 mm	100 mm	4075 mm
	3900 mm	2450 mm	100 mm	4375 mm
EJC 112zi	**Lift (h3)**	**Retracted mast height (h1)**	**Free lift (h2)**	**Extended mast height (h4)**
Duplex mast ZT	4100 mm	2550 mm	100 mm	4575 mm
	4300 mm	2650 mm	100 mm	4775 mm
Triplex mast DZ	4700 mm	2050 mm	1564 mm	5213 mm

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich	
	1.2	Manufacturer's type designation			EJC 1zi	
	1.3	Drive			electric	
	1.4	Operation			Pedestrian	
	1.5	Load capacity/load	Q	kg	1000	1200
	1.5.1	Rated capacity/load with mast lift	Q	kg	1000	1200
	1.5.2	Rated capacity/load with support arm lift	Q	kg	1400	1600
	1.6	Load centre distance	c	mm	600	
	1.8	Load distance, centre of drive axle to fork	x	mm	914	
	1.9	Wheelbase	y	mm	1493	
Weights	2.1.1	Service weight (incl. battery)		kg	860	870
	2.2	Axle load laden front/rear		kg	840 / 1020	890 / 1180
	2.3	Axle load unladen front/rear		kg	610 / 250	620 / 250
Wheels/suspension system	3.1	Tyres			Polyurethane (PU)	
	3.2	Tyre size, front			Ø230 x 70	
	3.3	Tyre size, rear			Ø 85 x 95 / Ø 85 x 75	
	3.4	Additional wheels			Ø140 x 54	
	3.5	Wheels, number front/back (x=driven)			1x +1 / 2	
	3.6	Tread width, front	b10	mm	507	
	3.7	Tread width, rear	b11	mm	385	
Basic dimensions	4.2	Retracted mast height (h1)	h1	mm	1950	
	4.3	Free lift (h2)	h2	mm	100	
	4.4	Lift (h3)	h3	mm	2900	
	4.5	Extended mast height (h4)	h4	mm	3375	
	4.6	Initial lift	h5	mm	122	
	4.9	Height of tiller handle in drive position min./max.	h14	mm	750 / 1260	
	4.15	Height, lowered	h13	mm	90	
	4.19	total length	l1	mm	1899	
	4.20	Length including fork shank	l2	mm	749	
	4.21.1	total width	b1	mm	800	
	4.22	Fork dimensions	s/e/l	mm	56 x 185 x 1150	
	4.25	Width across forks	b5	mm	570	
	4.32	Ground clearance centre of wheelbase	m2	mm	18	
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	2136	
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	2186	
	4.35	Turning radius	Wa	mm	1700	
Performance data	5.1	Travel speed laden/unladen		km/h	6 / 6	
	5.2	Lift speed laden/unladen		m/s	0.15 / 0.24	0.16 / 0.29
	5.3	Lowering speed laden/unladen		m/s	0.34 / 0.34	0.41 / 0.37
	5.8	Max. gradeability laden/unladen		%	5 / 14	
	5.10	Service brake			generative	

E-motor/Electronics	6.1	Drive motor, performance S2 60 min	kW	0.9
	6.2	Lift motor, performance with S3	kW	2.2
	6.3	Battery according to DIN 43531/35/36		no
	6.4	Battery voltage/nominal capacity	V / Ah	24 / 105
	6.5	Battery weight	kg	45
	6.6.1	Energy consumption according to EN cycle	kWh/h	0.66
	6.6.2	CO2 equivalent according to EN ISO 23308	kg/h	0.36
Other	8.1	Type of drive control		AC
	10.7	Sound pressure level according to EN12053	dB (A)	65

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

All values for standard mast type 2900 ZT; support arms raised.

- VDI no. 1.8: with DZ mast: x - 40 mm; with lowered support arms: x + 51 mm.
- VDI no. 1.9: with lowered support arms: y + 51 mm.
- VDI no. 4.19: with DZ mast: l1 + 40 mm.
- VDI no. 4.20: with DZ mast: l2 + 40 mm.
- VDI no. 4.34.1: diagonal as per VDI: aisle width + 370 mm: with DZ: aisle width + 40 mm; tiller in upright position (slow travel).
- VDI no. 4.34.2: diagonal as per VDI: aisle width + 206 mm: with DZ mast: aisle width + 40 mm; tiller in upright position (slow travel).
- VDI no. 4.35: with lowered support arms: x + 51 mm; tiller in upright position (slow travel).
- VDI no. 5.8: max. gradeability laden with VDI 1.5.2: 4%.
- VDI no. 6.2: EJC 110zi: S3 = 5% ED; EJC 112zi: S3 = 10% ED.

The German production facilities in Norderstedt, Moosburg and Landsberg are certified as well as our Genuine Parts Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.

CE

JUNGHEINRICH