




Electric pedestrian pallet truck **AME 15**

Lift height: 115 mm / Load capacity: 1500 kg

AME 15

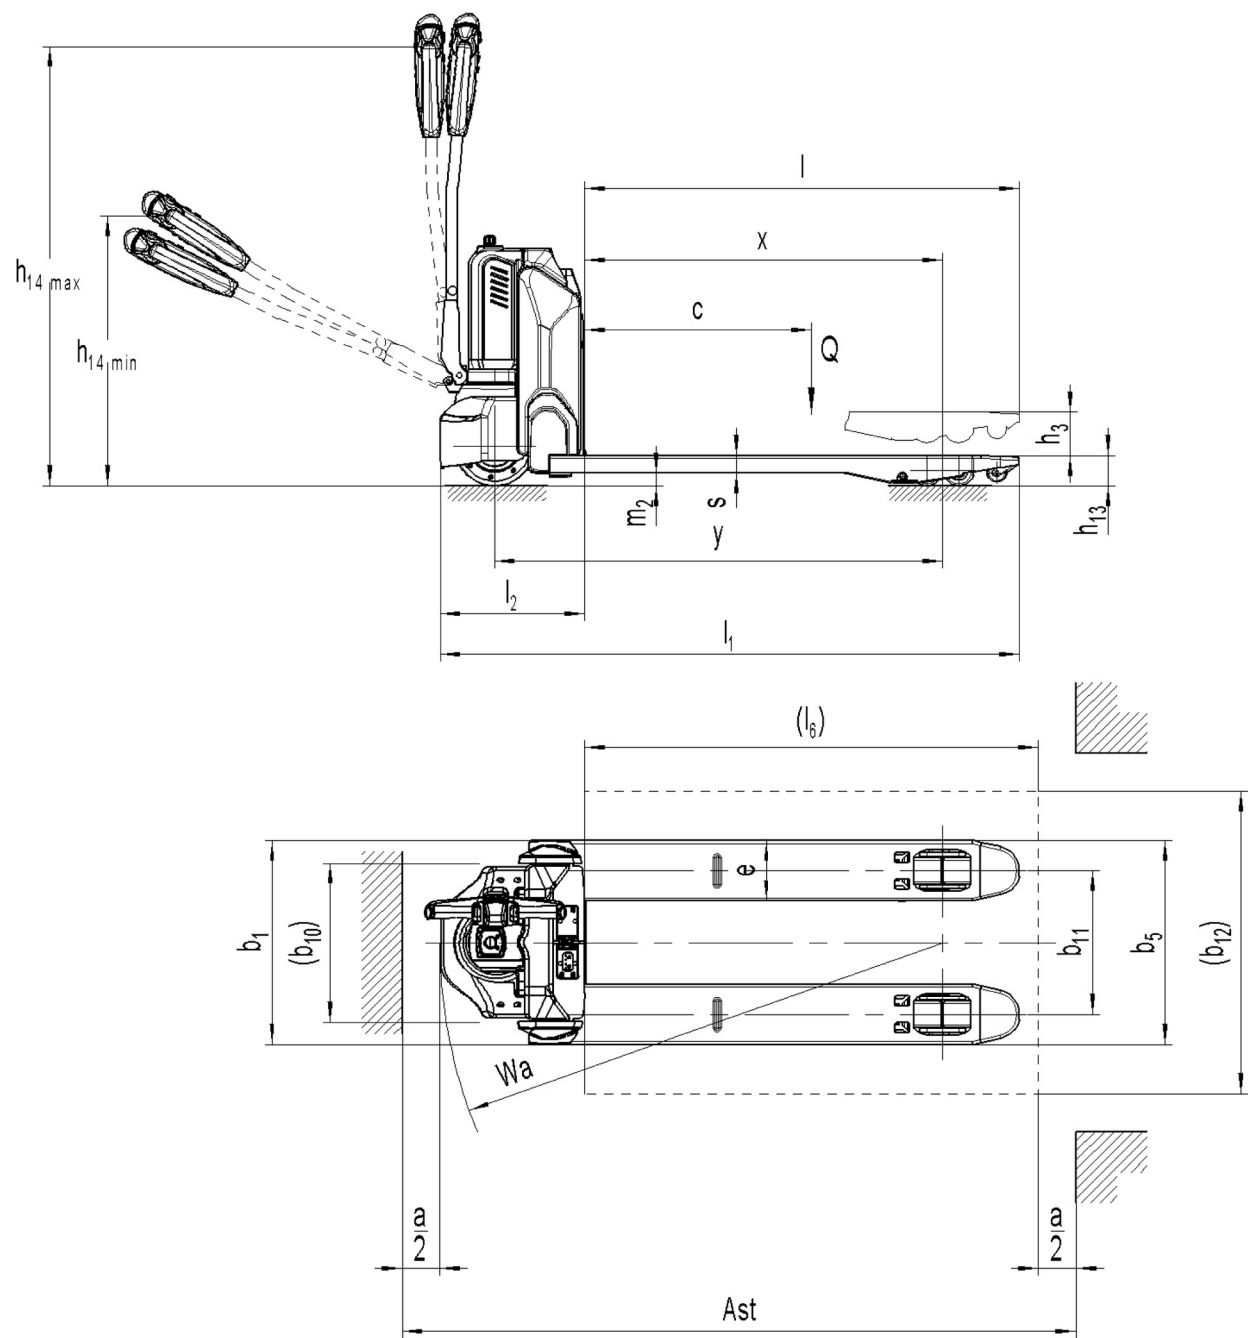

VDI table

Stand-on: 02/2023

Characteristic	1.1	Manufacturer (abbreviated description)			Jungheinrich
	1.2	Manufacturer's type designation			AME 15
	1.3	Drive			Electric
	1.4	Operation			Pedestrian
	1.5	Load capacity/load	Q	kg	1500
	1.6	Load centre distance	c	mm	600
	1.8	Load distance, centre of drive axle to fork	x	mm	947
	1.9	Wheelbase	y	mm	1183
Weights	2.1.1	Service weight (incl. battery)		kg	126
	2.2	Axle load laden front/rear		kg	626 / 1000
	2.3	Axle load unladen front/rear		kg	97 / 29
Wheels/suspension system	3.1	Tyres			Polyurethane (PU)
	3.2	Tyre size, front			Ø210 x 70
	3.3	Tyre size, rear			Ø80 x 70
	3.5	Wheels, number front/back (x=driven)			1x / 4
	3.7	Tread width, rear	b ₁₁	mm	525
Basic dimensions	4.4	Lift (h3)	h ₃	mm	115
	4.9	Height of tiller handle in drive position min./max.		mm	700 / 1160
	4.15	Height, lowered	h ₁₃	mm	80
	4.19	Overall length	l ₁	mm	1530
	4.20	Length including fork shank	l ₂	mm	380
	4.21.1	Overall width	b ₁	mm	685
	4.22	Fork dimensions	s/e/l	mm	47 x 160 x 1150
	4.25	Width across forks	b ₅	mm	685
	4.32	Ground clearance centre of wheelbase	m ₂	mm	33
	4.34.8	Aisle width (pallet 800x1200 crosswise)	Ast	mm	1733
	4.35	Turning radius	W _a	mm	1330
Performance data	5.1	Travel speed laden/unladen		km/h	4.6 / 4.8
	5.2	Lift speed laden/unladen		m/s	0.02 / 0.02
	5.3	Lowering speed laden/unladen		m/s	0.05 / 0.04
	5.8	Max. gradeability laden/unladen		%	4 / 16
	5.10	Service brake			electromagnetic
E-motor/ Electronics	6.1	Drive motor, performance S2 60 min		kW	0.65
	6.2	Lift motor, performance with S3		kW	0.5
	6.4	Battery voltage/nominal capacity		V / Ah	24 / 36
	6.5	Battery weight		kg	7
Other	8.1	Type of drive control			Impulse/DC
	10.7	Sound level as per EN12053, operator's ear		dB (A)	70

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**