





Hand pallet truck with scales

AMW 22 / 22p

Lift height: 122 mm / Load capacity: 2200 kg

 JUNGHEINRICH

AMW 22 / 22p

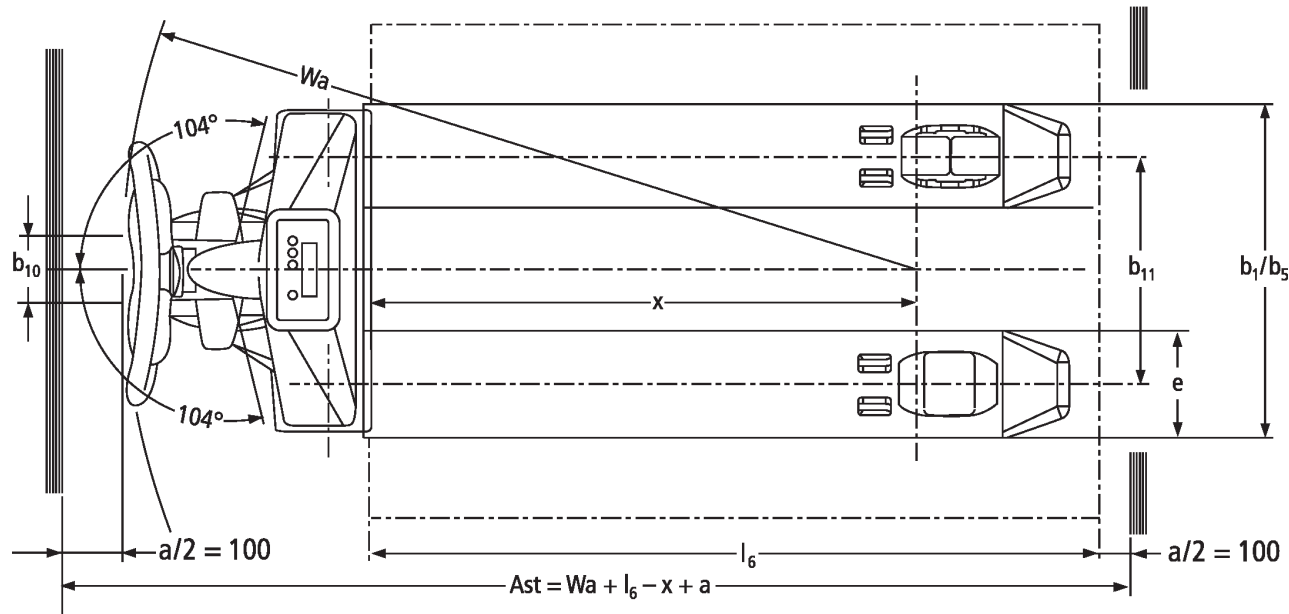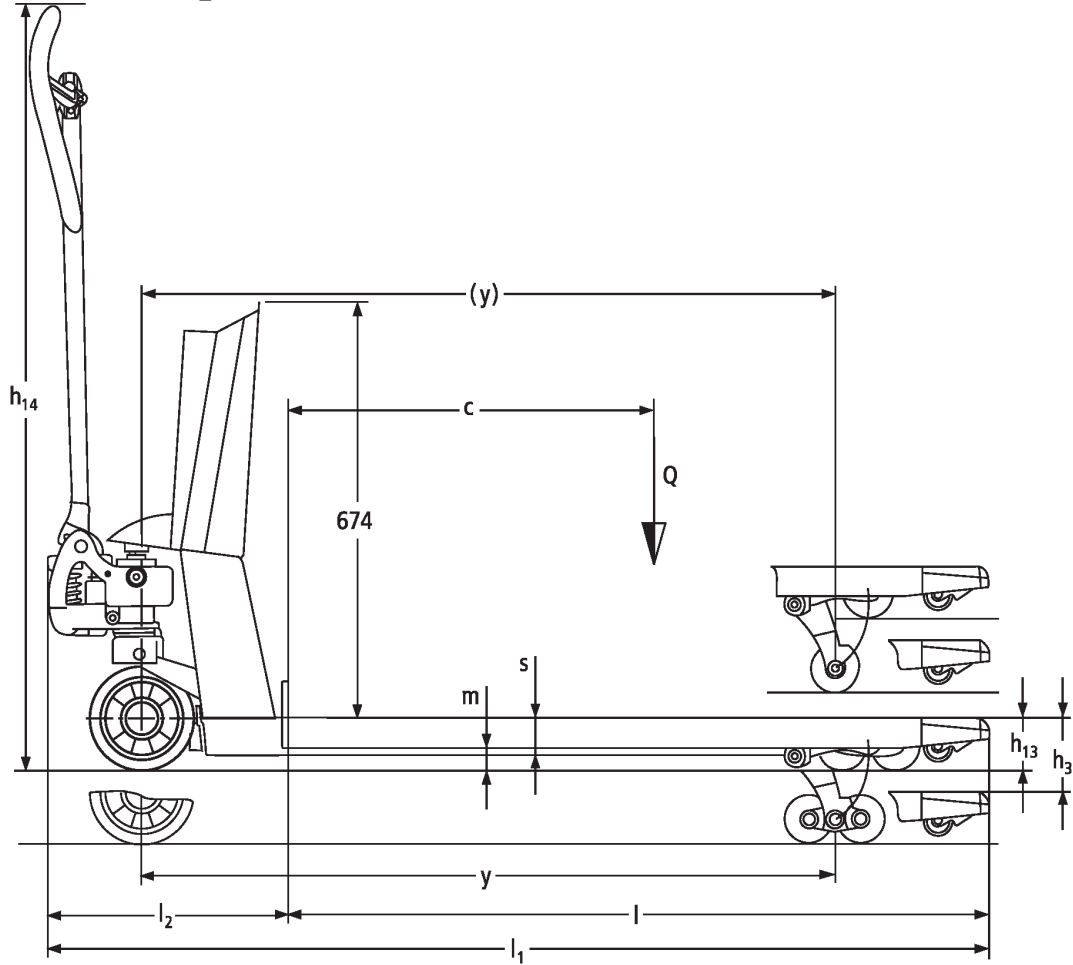

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)			AMW 22				other (OEM)			
	1.2	Manufacturer's type designation			AMW 22				AMW 22p			
	1.3	Drive type							Manual			
	1.4	Operation							Manual			
	1.5	Load capacity/load	Q	kg					2200			
	1.6	Load centre distance	c	mm					600			
	1.9	Wheelbase	y	mm					1110			
Weights	2.1	Netto weight		kg	99				102			
	2.2	Axle load laden front/rear		kg					578 / 1721			
	2.3	Axle load unladen front/rear		kg					61 / 38			
Wheels/chassis	3.1	Tyres			C-BV	V-GV	C-GV	V-BV	C-GV	C-BV	V-GV	V-BV
	3.2	Tyre size, front			Ø 170x50	Ø 170 x 50	Ø 170x50	Ø 170 x 50	Ø 170x50	Ø 170 x 50	Ø 170 x 50	Ø 170x50
	3.3	Tyre size, rear			Ø 82x96	Ø 82 x 96	Ø 82x96	Ø 82 x 96	Ø 82x96	Ø 82 x 96	Ø 82 x 96	Ø 82x96
	3.5	Wheels, number front/back (x=driven)							2/2			
	3.6	Tread width, front	b10	mm					109			
	3.7	Tread width, rear	b11	mm					370			
Basic dimensions	4.4	Lift (h3)	h3	mm					122			
	4.9	Height of tiller handle in drive position min./max.	h14	mm					1234			
	4.15	Height, lowered	h13	mm					86			
	4.19	Total length	l1	mm					1546			
	4.20	Length including fork shank	l2	mm					396			
	4.21.1	total width	b1	mm					540			
	4.22	Fork dimensions	s/ e/l	mm					62 x 170 x 1150			
	4.25	Width across forks	b5	mm					540			
	4.32	Ground clearance centre of wheelbase	m2	mm					24			
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast	mm					1763			
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm					1813			
	4.35	Turning radius	Wa	mm					1303			
Performance data	5.3	Lowering speed laden/unladen		m/s					0.09 / 0.02			

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**