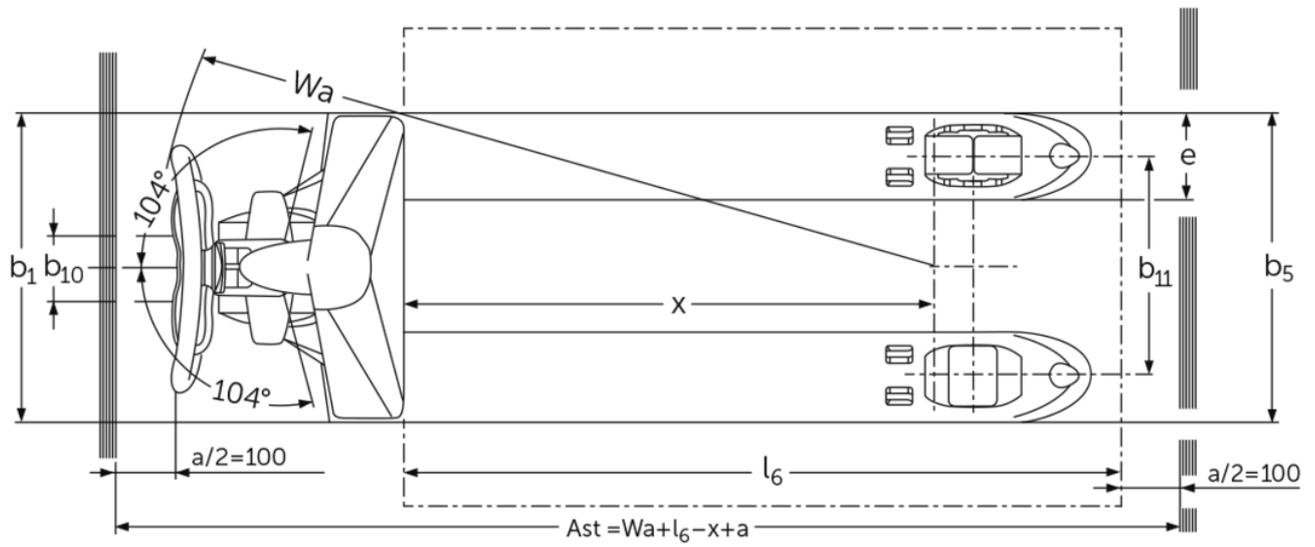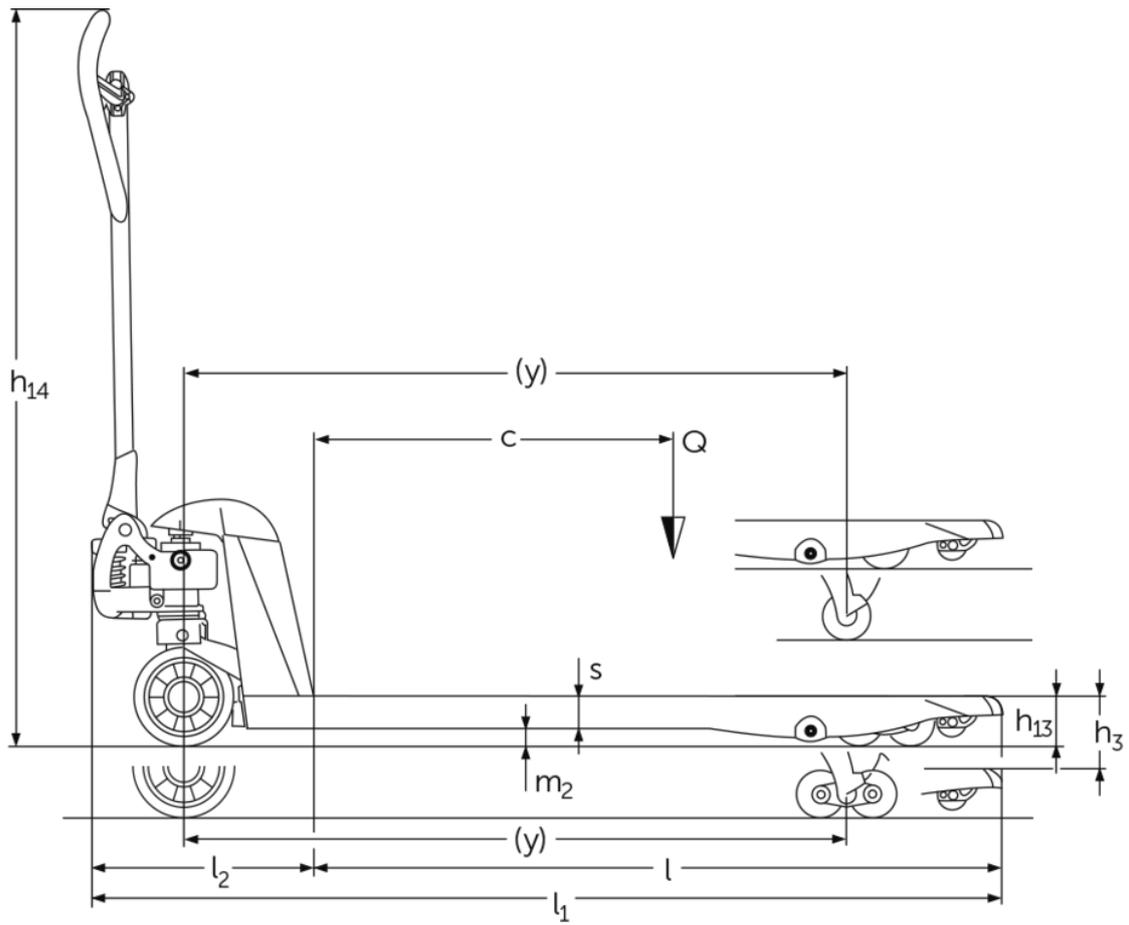# Hand pallet truck with flat forks

AM 15l

Lift height: 120 mm / Load capacity: 1500 kg

JUNGHEINRICH

AM 15l

VDI table

					Other (OEM)			
Characteristic	1.1	Manufacturer (abbreviated description)			Other (OEM)			
	1.3	Drive			Manual			
	1.4	Operation			Manual			
	1.5	Load capacity/load	Q	kg	1500			
	1.6	Load centre distance	c	mm	600	500	400	600
	1.9	Wheelbase	y	mm	1100	900	745	1080
Weights	2.1	tare weight		kg	74	72	71	65
	2.2	Axle load laden front/rear		-		- / -		476 / 613
	2.3	Axle load unladen front/rear		-	- / -	60 / 28	- / -	60 / 28
Wheels/suspension system	3.1	Tyres			C-BN			
	3.2	Tyre size, front			Ø 170x50			
	3.3	Tyre size, rear			Ø 50x70			
	3.5	Wheels, number front/back (x=driven)			2/4			
	3.6	Tread width, front	b10	mm	109			
	3.7	Tread width, rear	b11	mm	370			
Basic dimensions	4.4	Lift (h3)	h3	mm	120			
	4.9	Height of tiller handle in drive position min./max.	h14	mm	1237			
	4.14	Stand height, elevated	h12	mm	171			
	4.15	Height, lowered	h13	mm	51			
	4.19	total length	l1	mm	1530	1330	1175	1530
	4.20	Length including fork shank	l2	mm	380			
	4.21.1	total width	b1	mm	520			680
	4.22	Fork dimensions	s/e/l	mm	38 x 150 x 1150	38 x 150 x 950	38 x 150 x 795	38 x 150 x 1150
	4.25	Width across forks	b5	mm	520			680
	4.32	Ground clearance centre of wheelbase	m2	mm	13			
	4.34.1	Aisle width (pallet 1000×1200 sideways)	Ast	mm	1584			
	4.34.2	Aisle width (pallet 800x1200 length)	Ast	mm	1784			
	4.35	Turning radius	Wa	mm	1274			
Performance data	5.3	Lowering speed laden/unladen		m/s	0.09 / 0.02			

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

JUNGHEINRICH