




Electric tow tractor


EZS MB 230

Towing capacity: 3000 kg



EZS MB 230

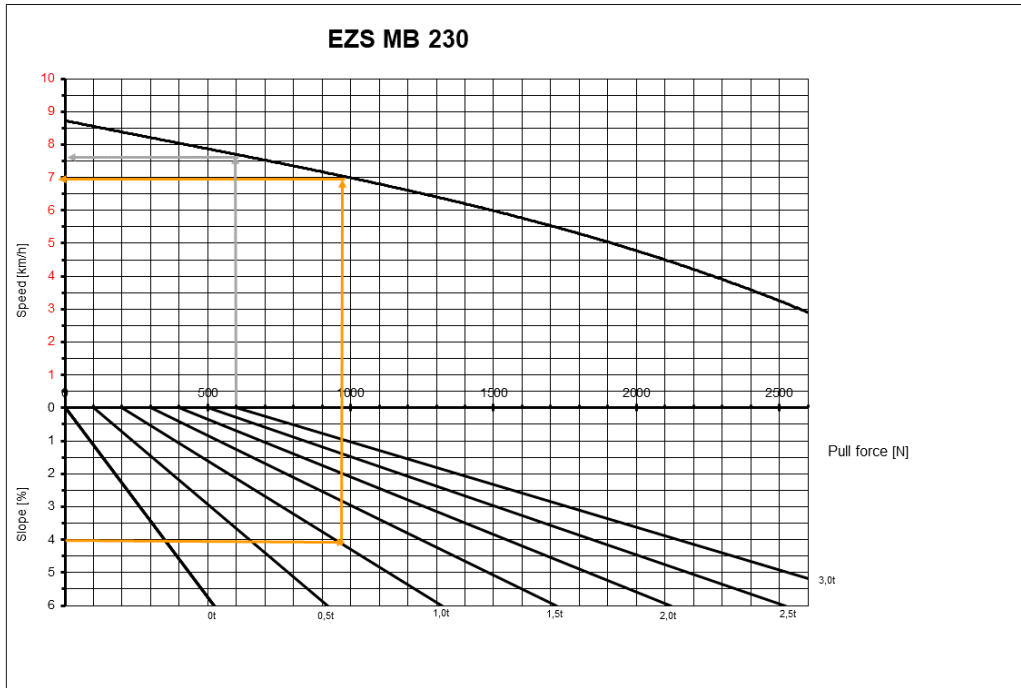

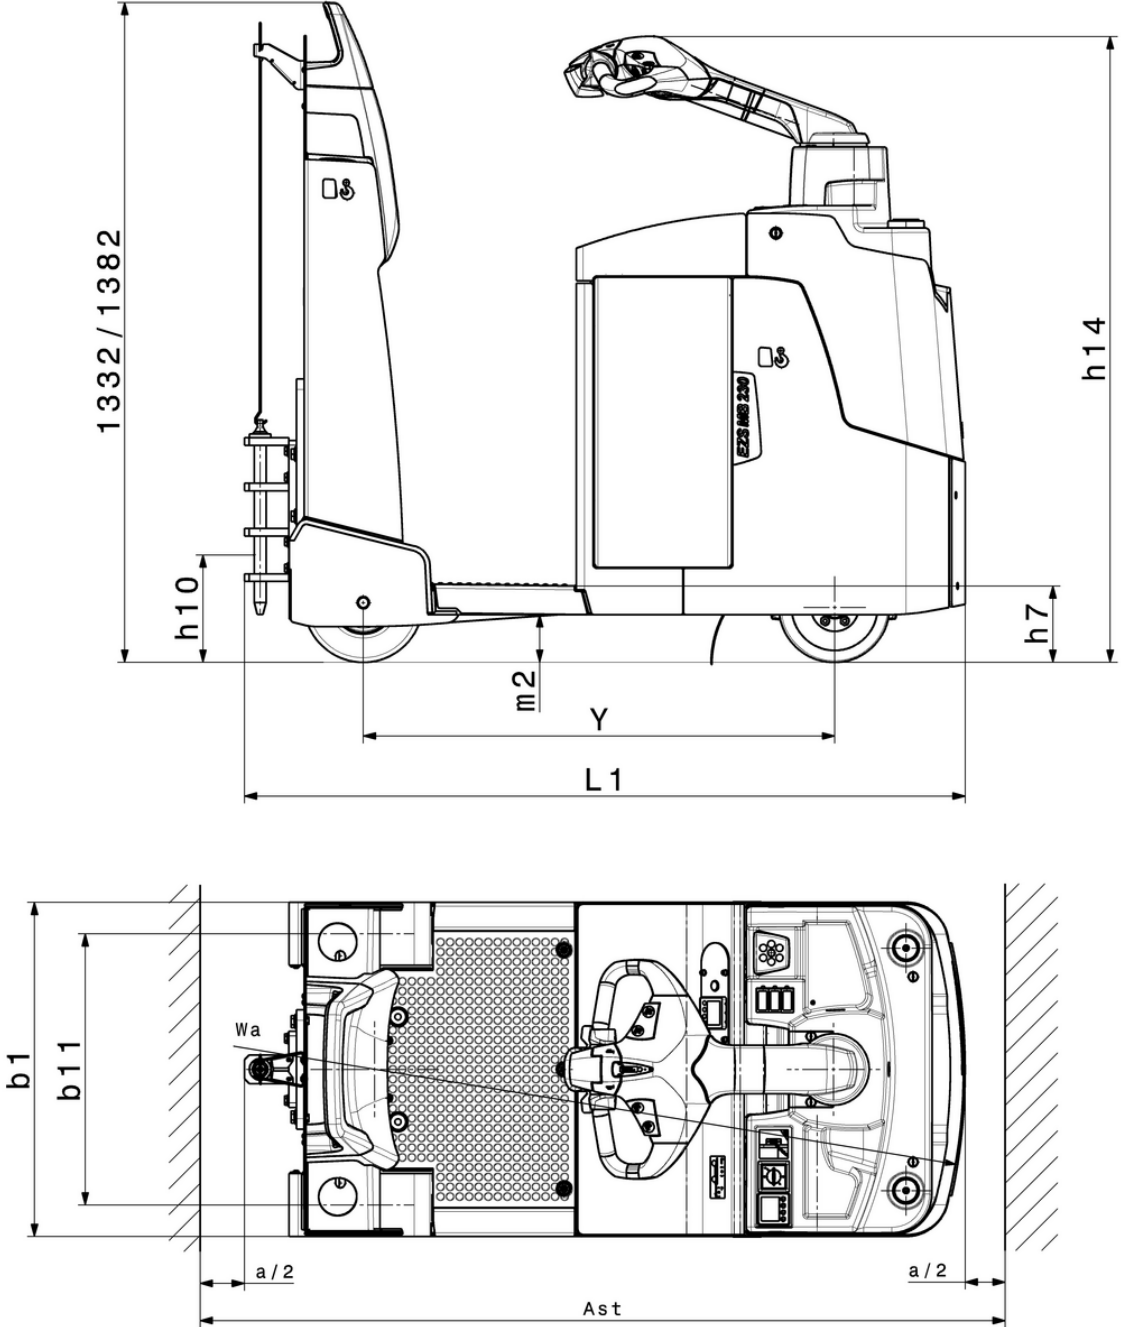

VDI table

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.3	Drive		Electric
	1.4	Operation		Stand-on
	1.5.3	Towing capacity	Q kg	3000
	1.7	Rated drawbar pull	N	750
	1.9	Wheelbase	y mm	985
Weights	2.1.1	Service weight (incl. battery)	kg	801
	2.3	Axle load unladen front/rear	kg	431 / 370
Wheels/suspension system	3.1	Tyres		Polyurethane / Super-elastic
	3.2	Tyre size, front		Ø 230 x 70
	3.3	Tyre size, rear		Ø 250 x 80
	3.4	Additional wheels		1 x / 2
	3.7	Tread width, rear	b11 mm	568
Basic dimensions	4.8	Seat height/stand height	h7 mm	118
	4.9	Height of tiller handle in drive position min./max.	h14 mm	1262 / 1262
	4.12	Coupling height	h10 mm	175
	4.19	total length	l1 mm	1520
	4.21.1	total width	b1 mm	700
	4.32	Ground clearance centre of wheelbase	m2 mm	50
	4.35	Turning radius	Wa mm	1261
Performance data	5.1	Travel speed laden/unladen	km/h	7.5 / 8.5
	5.5	Drawbar pull laden/unladen	N / -	750 / -
	5.6	Max. drawbar pull laden/unladen	N	2600 / 2600
	5.10	Service brake		generative
E-motor/Electronics	6.1	Drive motor, performance S2 60 min	kW	1.6
	6.4	Battery voltage/nominal capacity	V / Ah	24 / 250
	6.5	Battery weight	kg	212
	6.6.1	Energy consumption according to EN cycle	kWh/h	1.16
	6.6.2	CO2 equivalent according to EN ISO 23308	kg/h0	0.6

Other	8.1	Type of drive control		AC
	10.7	Sound pressure level according to EN12053	dB (A)	60

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

The German production facilities in
Norderstedt, Moosburg and Landsberg are
certified as well as our Genuine Parts
Center in Kaltenkirchen.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet European
safety requirements.



 **JUNGHEINRICH**

The logo features a red arrow pointing upwards, positioned to the left of the word 'JUNGHEINRICH' which is written in a bold, black, sans-serif font.